

## Series 33X

Piezoresistive pressure transmitters with maximum accuracy of 0,01 %FS

### Features

- Maximum accuracy/precision down to 0,01 %FS
- RS485 interface can be combined with analog interface
- Analog interface rangeable by RS485 interface (turn-down)
- Modbus RTU protocol for process values and configuration
- Highest long-term stability

### Technology

- Insulated and encapsulated piezoresistive pressure sensor
- High-quality pressure transducers and tried-and-tested mathematical compensation

### Typical applications

- Laboratory use
- Test benches
- Gauge standard
- Precision measurements
- Industrial applications

#### Accuracy

± 0,05 %FS

#### Total error band

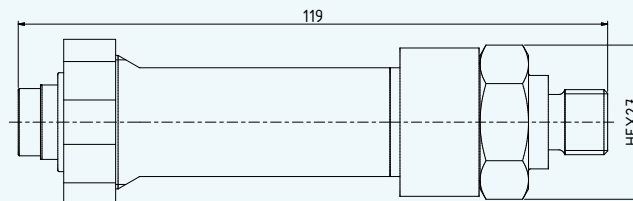
± 0,1 %FS @ -10...80 °C

#### Pressure ranges

0...0,3 to 0...1000 bar



Series 33X



## Series 33X – Specifications

### Standard pressure ranges

| Relative pressure<br>PR                |            | Proof pressure              |
|--|------------|-----------------------------|
| 0...0,3                                | -0,3...0,3 | 3                           |
| 0...1                                  | -1...1     |                             |
| 0...3                                  | -1...3     | 9                           |
| 0...6                                  | -1...6     | 18                          |
| 0...10                                 | -1...10    | 30                          |
| 0...16                                 | -1...16    | 48                          |
| 0...30                                 | -1...30    | 90                          |
| bar rel.                               |            | bar                         |
| Reference pressure at ambient pressure |            | Based on reference pressure |

| Absolute pressure<br>PAA                  | Absolute pressure<br>PA          | Proof pressure              |
|---|----------------------------------|-----------------------------|
| 0,8...1,2                                 |                                  | 3                           |
| 0...1                                     | 0...1                            |                             |
| 0...3                                     | 0...3                            | 9                           |
| 0...6                                     | 0...6                            | 18                          |
| 0...10                                    | 0...10                           | 30                          |
| 0...16                                    | 0...16                           | 48                          |
| 0...30                                    | 0...30                           | 90                          |
| 0...60                                    | 0...60                           | 180                         |
| 0...100                                   | 0...100                          | 300                         |
| 0...300                                   | 0...300                          | 600                         |
| 0...700                                   | 0...700                          | 1100                        |
| 0...1000                                  | 0...1000                         | 1100                        |
| bar abs.                                  | bar                              | bar                         |
| Reference pressure at 0 bar abs. (vacuum) | Reference pressure at 1 bar abs. | Based on reference pressure |

All intermediate ranges for the analog interface can be ranged (turn-down) from the standard ranges without surcharge.  
Smallest range: 0,1 bar. Negative and further +/- ranges also possible. Optionally: adjust directly to intermediate ranges

### Performance

#### Pressure

|                                       |  |  |
|---------------------------------------|--|--|
| Digital nonlinearity                  | $\leq \pm 0,02 \%FS$   | Best fitted straight line (BFSL)   |
| Accuracy @ RT (20...25 °C)            | $\leq \pm 0,05 \%FS$   | Nonlinearity (best fitted straight line BFSL), pressure hysteresis, non-repeatability, zero point deviation and amplification deviation  |
| Total error band (10...40 °C)         | $\leq \pm 0,05 \%FS$   | Max. deviation within the compensated pressure and temperature range   |
| Total error band (-10...80 °C)        | $\leq \pm 0,1 \%FS$  | Max. deviation within the compensated pressure and temperature range<br>Experience shows that, outside the compensated temperature range, the total error band in the ambient temperature range is expanded by 0,1 %FS |
| Compensated temperature range         | 10...40 °C   | Extended room temperature range RT   |
|                                       | -10...80 °C  | Other, optional temperature ranges within -40...125 °C possible  |
| Analog interface additional deviation | $\leq \pm 0,05 \%FS$   | Based on accuracy @ RT and the total error band  |
| Long-term stability                   | Typ. $\pm 0,05 \%FS$   | Per year under reference conditions, yearly recalibration recommended  |
|                                       | Max. $\pm 0,10 \%FS$   |  |
| Position dependency                   | $\leq \pm 2 \text{ mbar}$  | Calibrated in vertical installation position with pressure connection facing downwards   |
| Resolution                            | 0,0005 %FS   | Digital  |
| Signal stability                      | 0,0025 %FS   | Digital noise-free   |
| Internal measurement rate             | $\geq 1800 \text{ Hz}$   | For version «3-wire + digital (0...10 V, 0...5 V)» $> 6000 \text{ Hz}$   |
| Pressure range reserve                | $\pm 10 \%$  | Outside the pressure range reserve, +Inf/-Inf is displayed.<br>If there is an error in the device, NaN is displayed  |
| Vacuum resistance                     | For operating pressures $\leq 0,1 \text{ bar abs.}$ , a vacuum-optimised version is recommended            |  |
| Note                                  | For pressure ranges $< 1 \text{ bar}$ , all data apply with reference to a full-range signal (FS) of 1 bar |  |

## Series 33X – Specifications

### Temperature

|                           |                        |   |
|---------------------------|------------------------|---|
| Accuracy                  | $\leq \pm 2\text{ °C}$ | The temperature is measured on the pressure sensor (silicon chip) that sits behind the metallic separating diaphragm<br>The values are valid within the compensated temperature range |
| Resolution                | $\leq 0,01\text{ °C}$  |   |
| Internal measurement rate | $> 10\text{ Hz}$       |   |




### Increased Precision / Accuracy (optional)

If customers choose, KELLER can achieve the highest degree of reproducibility (precision) for certain products by increasing the amount of measurement work it undertakes and selecting corresponding pressure transducers. In addition, some products can be adjusted to their higher accuracy pressure sources by an accredited calibration laboratory. The specifications for increased precision only refer to the digital interface RS485. See the more comprehensive descriptions below for more details.

#### Limitations:

- Only for absolute pressure PAA / PA
- Only for standard pressure ranges  $\geq 10\text{ bar}$
- Analog output 4...20 mA excluded

|                        |                             |  |
|------------------------|-----------------------------|--|
| Precision (10...40 °C) | $\leq \pm 0,01\text{ %FS}$  | With KELLER calibration certificate ex works   |
|                        | $\leq \pm 0,025\text{ %FS}$ |  |
| Accuracy @ RT          | $\leq \pm 0,01\text{ %FS}$  | With DakkS (German accreditation body) certificate issued by external calibration laboratory |
|                        | $\leq \pm 0,025\text{ %FS}$ |  |

|   |  |
|---|--|
|  | <p>Accuracy <math>\pm 0,05\text{ %FS}</math>, with KELLER calibration certificate ex works (standard)</p> <p>Keller uses pressure sources to calibrate its products that are at least four times more accurate than the product to be tested. This enables us to produce products in our factory with an absolute accuracy of up to <math>\pm 0,05\text{ %FS}</math>.</p>  |
|  | <p>Precision <math>\pm 0,01\text{ %FS}</math> / <math>\pm 0,025\text{ %FS}</math>, with KELLER calibration certificate ex works</p> <p>Additional measurement work and selection of a specific pressure transducer means that optimum repeatability is guaranteed for selected pressure transmitters and digital manometers. Owing to the residual measurement uncertainty of the pressure sources used at its factory, KELLER cannot provide any verification of measurement accuracy at scales below <math>\pm 0,05\text{ %FS}</math> for these ultra-precise devices. KELLER therefore uses the term "precision" to denote the ability of a pressure transmitter or manometer to repeat measured values within a tolerance of <math>0,01\text{ %FS}</math> based on the pressure sources used at the factory.</p> |
|  | <p>Accuracy <math>\pm 0,01\text{ %FS}</math> / <math>\leq \pm 0,025\text{ %FS}</math> with DakkS (German accreditation body) certificate, issued by an external accredited calibration laboratory</p> <p>By calibrating the zero point and performing amplification via the digital interface, an accredited calibration laboratory (ilac.org) can adapt ultra-precise KELLER products to their more accurate pressure sources and record the results.</p> <p>External calibration to an accuracy of up to <math>\pm 0,01\text{ %FS}</math> is performed in accordance with the guidelines set out by the German Calibration Service (DKD) and is conducted under reference conditions without any consideration of long-term effects.</p>   |

## Series 33X – Specifications

### Electrical data

| Connectivity                              | Digital   | 2-wire + digital | 3-wire + digital |            |              |
|---|---|------------------|------------------|------------|--------------|
| Analog interface                          |   | 4...20 mA        | 0...10 V         | 0...5 V    | 0,1...2,5 V  |
| Digital interface                         | RS485   | RS485            | RS485            | RS485      | RS485        |
| Power supply                              | 3,2...32 VDC  | 8...32 VDC       | 13...32 VDC      | 8...32 VDC | 3,2...32 VDC |
| Power consumption (without communication) | < 8 mA  | 3,5...22,5 mA    | < 8 mA           | < 8 mA     | < 8 mA       |
| RS485 voltage insulation                  | ± 32 VDC  | ± 18 VDC         | ± 32 VDC         | ± 32 VDC   | ± 32 VDC     |
| Note                                      | Disturbance of the 4...20 mA signal occurs during communication via the digital interface<br>3-wire types are suitable for simultaneous operation of the analog and digital interface |                  |                  |            |              |

|   |                   |
|---|-------------------|
| Start-up time (power supply ON)             | < 250 ms          |
| Overvoltage protection and reverse polarity | ± 32 VDC          |
| GND case insulation                         | > 10 MΩ @ 300 VDC |

#### Analog interface

|                    |   |                            |
|--------------------|---|----------------------------|
| Load resistance    | < (U - 8 V)/25 mA                                 | 2-wire                     |
|                    | > 5 kΩ  | 3-wire                     |
| Limiting frequency | ≥ 300 Hz  | 2-wire                     |
|                    |   | 3-wire (0,1...2,5 V)       |
|                    | ≥ 1000 Hz   | 3-wire (0...10 V, 0...5 V) |
| Note               | Filter properties can be adjusted by the customer |                            |

#### Digital interface

|                         |                        |  |
|-------------------------|------------------------|--|
| Type                    | RS485                  | Half-duplex  |
| Communication protocols | Modbus RTU             |  |
|                         | KELLER bus protocol    | Proprietary  |
| Identification          | Class.Group: 5.24      | Standard settings:<br>bus address 1,<br>baud rate 9600 bit/s   |
| Unit of pressure        | Bar                    |  |
| Unit of temperature     | °C                     | Other default settings<br>available on request. Can be<br>reconfigured via software by<br>the customer later |
| Data type               | Float32 and Int32      |  |
| Baud rates              | 9600 and 115'200 bit/s |  |
| Lines                   | up to 1,2 km           |  |

#### Electrical connection

|                        |                     |                                    |
|------------------------|---------------------|------------------------------------|
| Plug type              | Binder series 723   | DIN EN 61076-2-106, 5-pin          |
|                        | M12 x 1             | DIN EN 61076-2-101, A-coded, 5-pin |
|                        | Souriau series 8525 | MIL-STD-1669                       |
|                        | GSP (without RS485) | EN 175301-803-A (DIN 43650)        |
| Cable                  | ø 5,8 mm, PE sheath | 5-wire, cable gland                |
| Standard cable lengths | 2 m, 5 m            | Others on request                  |

#### Electromagnetic compatibility

|                                       |   |
|---------------------------------------|---|
| CE-conformity as per 2014/30/EU (EMC) | EN 61326-1/EN 61326-2-3/EN 61000-6-1/EN 61000-6-2/EN 61000-6-3/EN 61000-6-4 |
|---------------------------------------|---|

## Series 33X – Specifications

### Mechanical data

Materials in contact with media

|  |                              |  |                   |
|--|------------------------------|--|-------------------|
| Pressure connection                      | Stainless steel AISI 316L    |  | Others on request |
| Pressure transducer separating diaphragm | Stainless steel AISI 316L    |  |                   |
| Pressure transducer seal (internal)      | FKM                          | For media temperatures <-20 °C<br>FVMQ (70 Shore, -60...175 °C) is used<br>Optional: EPDM (-40...150 °C) | Others on request |
| Pressure connection seal (external)      | FKM (75 Shore, -20...200 °C) |  |                   |

Other materials

|                                 |              |                   |
|---------------------------------|--------------|-------------------|
| Pressure transducer oil filling | Silicone oil | Others on request |
|---------------------------------|--------------|-------------------|

Further details

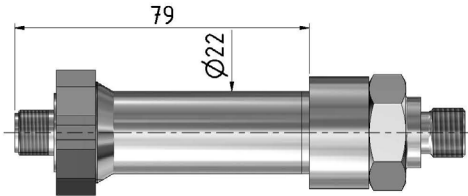
|                          |  |                            |
|--------------------------|--|----------------------------|
| Pressure connection      | A wide range of pressure connections are available | See dimensions and options |
| Weight (excluding cable) | Between 130 g and 250 g                            | Depends on version         |


### Ambient conditions

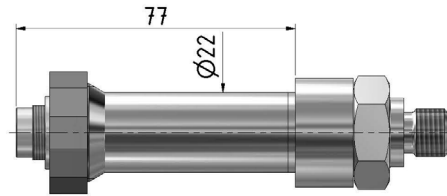
|                                      |  |                          |  |
|--------------------------------------|--|--------------------------|--|
| Media temperature range              | -20...125 °C   | Optionally: -40...125 °C | Icing not permitted  |
| Ambient temperature range            | -20...85 °C  | Optionally: -40...85 °C  |  |
| Storage temperature range            | -20...85 °C  | Optional: -40...85 °C    |  |
| Protection                           | IP67   | Binder series 723        | For relative pressure, use a cable with integrated capillary     |
|                                      | IP65   | GSP EN175301-803-A       |  |
|                                      | IP65   | Souriau series 8525      |  |
|                                      | IP67   | M12 x 1                  | For relative pressure IP54                                       |
|                                      | IP67   | Cable gland              | For relative pressure, a cable with integrated capillary is used |
| Notes                                | <ul style="list-style-type: none"> <li>Degrees of protection are valid with the corresponding mating plug.</li> <li>The design implementation of the ventilation for relative pressure versions can be found in the respective technical drawing.</li> </ul> |                          |  |
| Vibration resistance                 | 10 g, 10...2000 Hz, ±10 mm   | IEC 60068-2-6            |  |
| Shock endurance                      | 50 g, 11 ms  | IEC 60068-2-27           |  |
| Pressure endurance @ RT (20...25 °C) | > 10 million pressure cycles   | 0...100 %FS              | For pressures < 600 bar only                                     |
| Notes                                | For ultra-dynamic applications, the fully welded 23SX series without movable interior parts is recommended   |                          |  |


## Series 33X – Dimensions and options

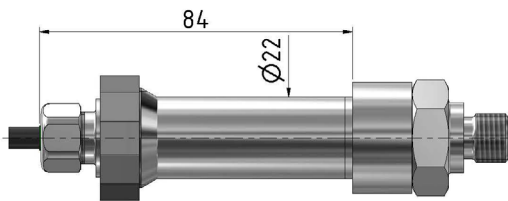
### Electrical connections




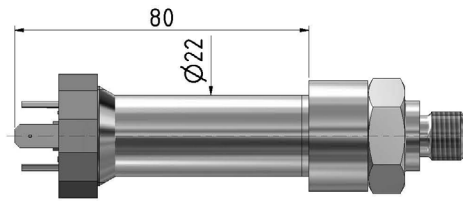
| M12   | 2-wire    | 3-wire        |
|---|-----------|---------------|
| M12 × 1   | 4...20 mA | 0...max. 10 V |
|  | 1 OUT/GND | 1 GND         |
|   | 2 n.c.    | 2 +OUT        |
|   | 3 +Vs     | 3 +Vs         |
|   | 4 RS485A  | 4 RS485A      |
|   | 5 RS485B  | 5 RS485B      |




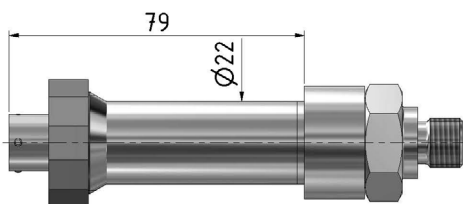
| Binder series 723   | 2-wire    | 3-wire        |
|---|-----------|---------------|
| M16 × 0,75  | 4...20 mA | 0...max. 10 V |
|  | 1 OUT/GND | 1 GND         |
|   | 2 n.c.    | 2 +OUT        |
|   | 3 +Vs     | 3 +Vs         |
|   | 4 RS485A  | 4 RS485A      |
|   | 5 RS485B  | 5 RS485B      |




| Cable gland   | 2-wire         | 3-wire         |
|---|----------------|----------------|
| Cable ø 5,8   | 4...20 mA      | 0...max. 10 V  |
|  | WH OUT/GND     | WH GND         |
|   | RD n.c.        | RD +OUT        |
|   | BK +Vs         | BK +Vs         |
|   | BU RS485A      | BU RS485A      |
|   | YE RS485B      | YE RS485B      |
|   | Shield on CASE | Shield on CASE |



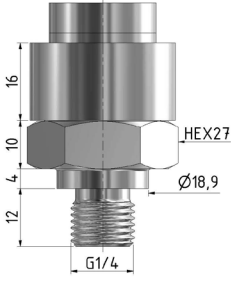
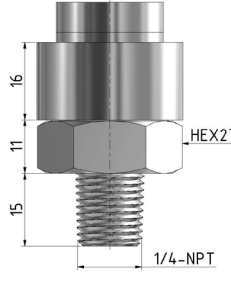
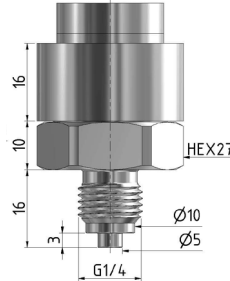
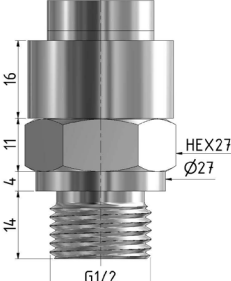
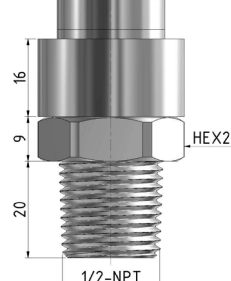
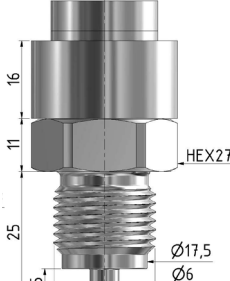
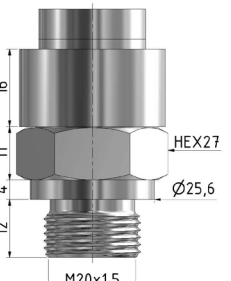
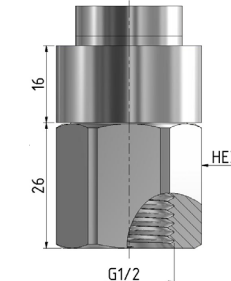
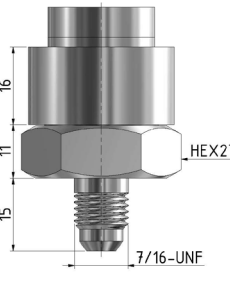
| GSP EN 175301-803-A   | 2-wire    | 3-wire        |
|---|-----------|---------------|
| □ 18  | 4...20 mA | 0...max. 10 V |
|  | 1 OUT/GND | 1 GND         |
|   | 2 n.c.    | 2 +OUT        |
|   | 3 +Vs     | 3 +Vs         |
|   | ⊥ CASE    | ⊥ CASE        |



| Souriau series 8525   | 2-wire         | 3-wire         |
|---|----------------|----------------|
|   | 4...20 mA      | 0...max. 10 V  |
|  | C OUT/GND      | C GND          |
|   | B n.c.         | B +OUT         |
|   | A +Vs          | A +Vs          |
|   | D RS485A       | D RS485A       |
|   | F RS485B       | F RS485B       |
|   | Shield on CASE | Shield on CASE |

## Series 33X – Dimensions and options

### Available pressure connections

|   |  |  |
|---|--|--|
| <p>G1/4</p>  <p>DIN EN ISO 1179-2</p>        | <p>1/4-18NPT</p>  <p>ASME/ANSI B 120.1</p>  | <p>G1/4 "Mano"</p>  <p>DIN EN 837</p>   |
| <p>G1/2</p>  <p>DIN EN ISO 1179-2</p>       | <p>1/2-14NPT</p>  <p>ASME/ANSI B 120.1</p> | <p>G1/2 "Mano"</p>  <p>DIN EN 837</p>  |
| <p>M20 x 1,5</p>  <p>DIN EN ISO 9974-2</p> | <p>G1/2 female</p>  <p>ISO 228-1</p>      | <p>7/16-20UNF 45° / SAE JIC 37°</p>  <p>ISO 12151-5, pressure ranges restricted</p> |

Other pressure connections available on request.

## Series 33X – Dimensions and options

### Other customer-specific options

- Other compensated pressure ranges
- Other compensated temperature ranges within -40...125 °C
- Other electrical connections
- Other pressure connections
- Parts that come into contact with media made from Hastelloy C-276, Inconel 718 or titanium
- O-rings made of other materials
- Other oil filling types for pressure transducers: e.g. special oils for oxygen applications
- Vacuum-optimised version for operating pressures  $\leq 0,1$  bar abs.
- Integration of application-specific calculations
- Modifications to customer-specific applications

### Examples of similar products

- Series PD-33X: Differential pressure transmitters with a very high level of accuracy
- Series 33Xc: Pressure transmitters with maximum accuracy of up to 0,01 %FS and CANopen interface
- Series 35X: Pressure transmitters with front-flush metal diaphragm and very high level of accuracy
- Series 23SX: Pressure transmitters with fully welded design and no internal seals
- OEM series: Pressure transducers with electronics (e.g. series 10LX or 20SX with thread) for integration in one's own systems



## Series 33X – Software, scope of delivery and accessories

### Modbus interface

The X-line products have a digital interface (RS485 half-duplex), which supports the MODBUS RTU and KELLER bus protocols. Details of the communication protocols can be found at [www.keller-druck.com](http://www.keller-druck.com). Documentation, a Dynamic Link Library (DLL) and various programming examples are available for integrating the communication protocol into your own software.

### Interface converters

The connection to a computer is established via an RS485-USB interface converter. To ensure smooth operation, we recommend the K-114 with the corresponding mating plug, robust driver module, fast RX/TX switching and connectable bias and terminating resistors.

### "CCS30" software

The licence-free software CCS30 is used to carry out configurations and record measured values.

#### Measurement collection

- Live visualisation
- Adjustable measuring and storage interval
- Export function
- Parallel recording in bus operation
- Up to 100 measured values per second






#### Configuration

- Call up of information (pressure and temperature range, software version, serial number etc.)
- Readjustment of zero point and amplification
- Rescaling of analog output (unit, pressure range)
- Adjustment of low-pass filter
- Selection of instrument address and baud rate

### Scope of delivery

| KELLER test report  | Mating plug to Binder 723   | Female connector to DIN43650  |
|---|---|---|
|  |  |  |

### Accessories

| Calibration certificate  | Interface converter  |  |   | Mating plug to M12   |
|--|--|--|---|--|
|                                       |   |   |   |   |
| Issued by the external calibration laboratory of the German accreditation body DAkkS or the Swiss accreditation body SAS | <b>K-114</b> <ul style="list-style-type: none"> <li>• Analog measurement 0...10 V and 4...20 mA</li> <li>• 12 V measuring device supply via USB</li> <li>• USB interface electrically isolated</li> <li>• Bias and terminating resistors can be activated</li> </ul> | <b>K-114BT</b> <ul style="list-style-type: none"> <li>• With Bluetooth interface and integrated rechargeable battery</li> <li>• Wireless connection via Serial Port Profile (SPP)</li> <li>• 15 V measuring device supply from the converter's internal battery</li> </ul> | <b>Connection options</b> <ul style="list-style-type: none"> <li>• E.g. K-114-B with cable outlet instead of screw-type terminals for Binder series 723 (5-pin)≠</li> <li>• Various adapter cables available</li> </ul> | <ul style="list-style-type: none"> <li>• Angled socket, cable 5 m <i>PN 602515.0093</i></li> <li>• Angled socket, cable 2 m <i>PN 602515.0094</i></li> <li>• Female connector, cable 5 m <i>PN 602515.0095</i></li> <li>• Female connector, cable 2 m <i>PN 602515.0096</i></li> </ul> |