




## NivuFlow Mobile 600

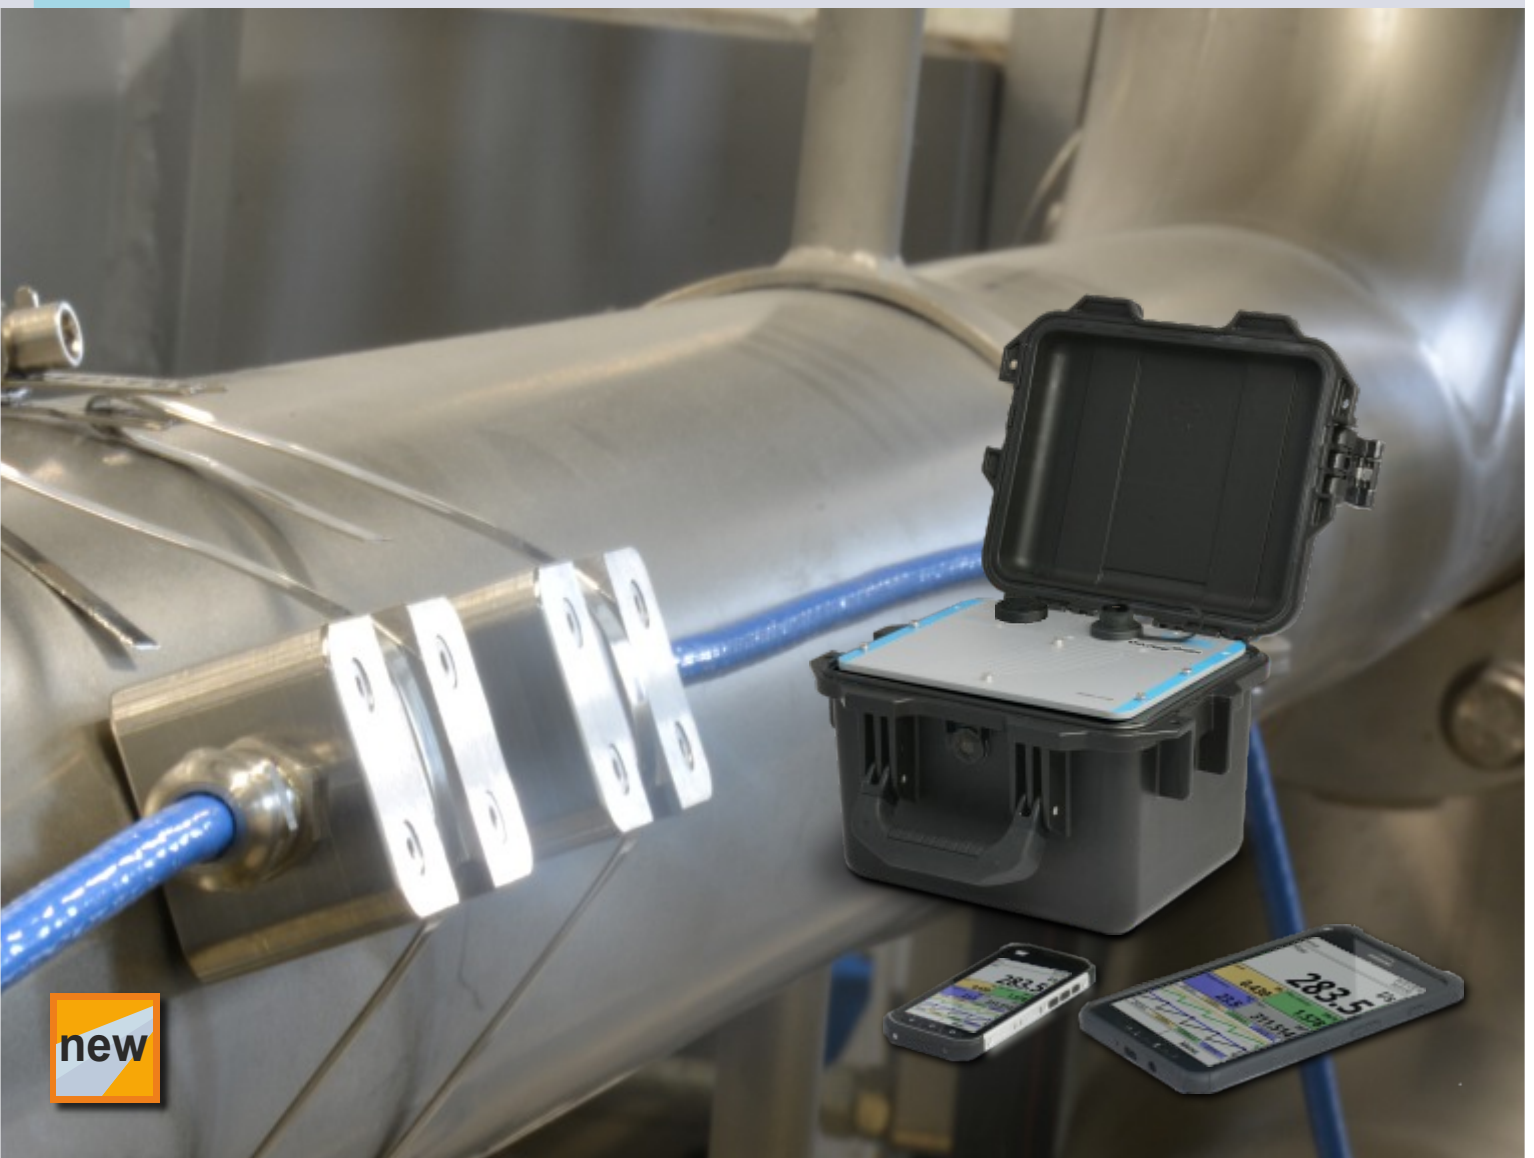

new




Temporary Flow Metering using Ultrasonic Transit Time



## Robust portable flow meter for long-term monitoring of full pipes

The NivuFlow Mobile 600 was developed particularly for long-term measurements in field operation without external power supply. Measurements for checking and verifying can be carried out with the self-sufficient and portable system even in harsh environments without any problems. Battery lifetimes of several weeks or even months reduce personnel costs for maintenance and data readout significantly.



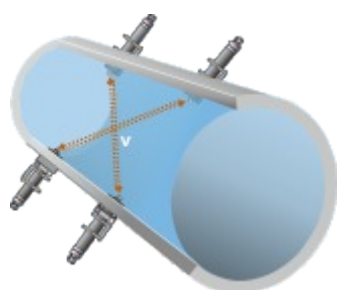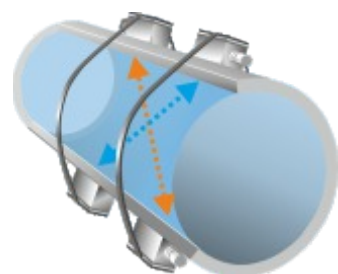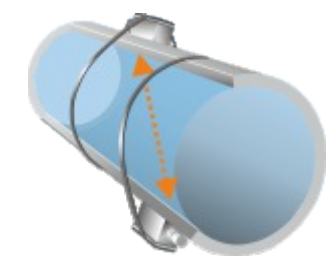

#### Your Benefits

- Monitoring of flow, temperature and pressure
- Ultrasonic transit time measurement
- Extremely long battery life
- Rechargeable battery can be replaced by user
- Operation via Smartphone, Tablet, Notebook
- For extreme environmental conditions
- Up to 2 measurement paths




#### Typical Applications

Leakage detection  
 Pump verification  
 Analysis of users behaviour in water supplies  
 Intakes and outlets conducting cooling water or circulation systems  
 Monitoring of process water and service water






## Transit Time – how the NivuFlow Mobile 600 measures

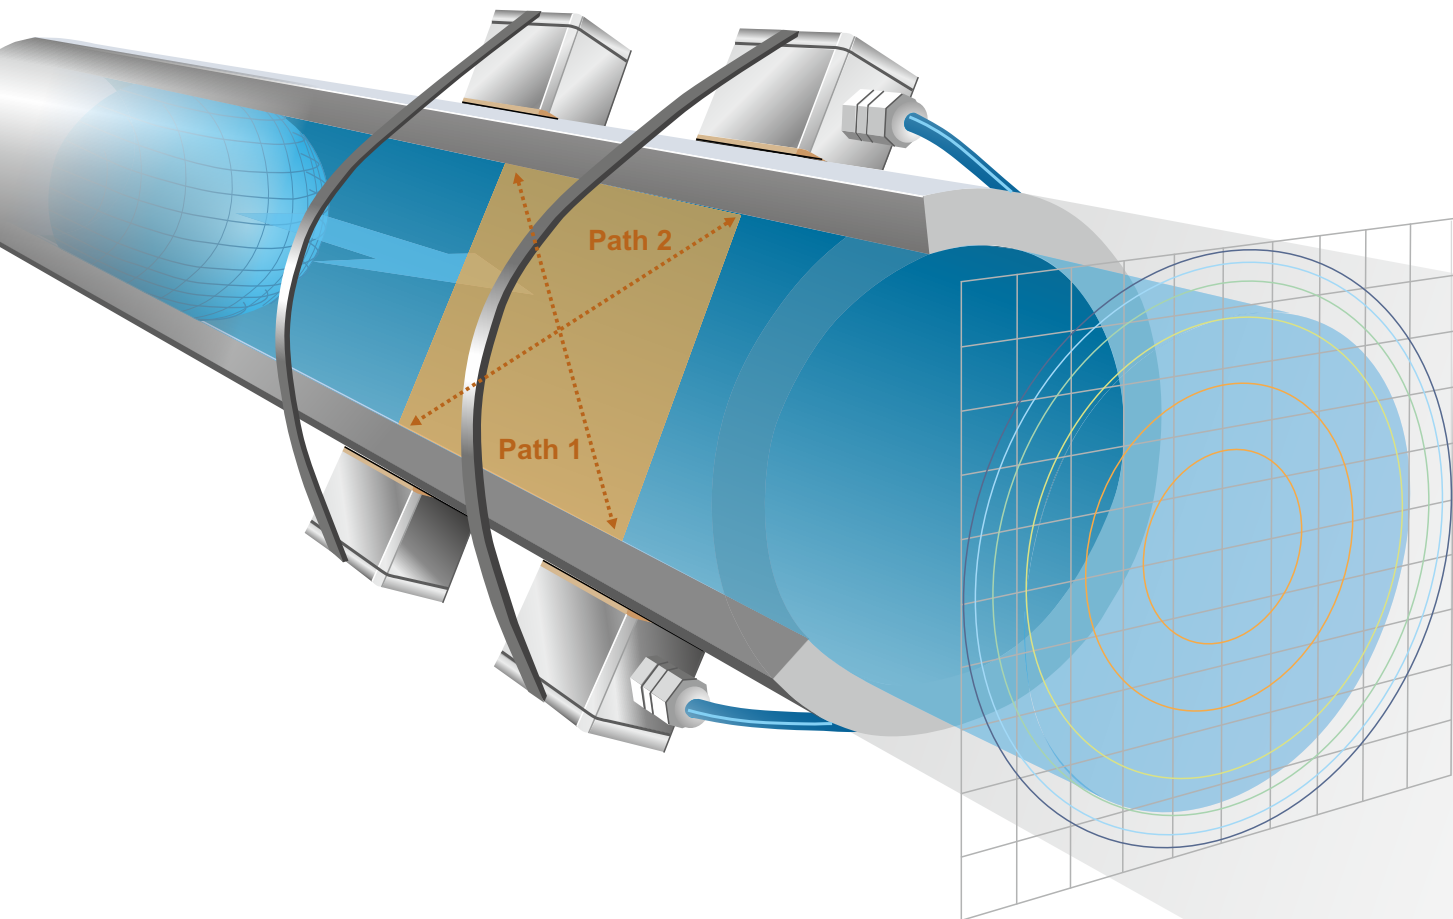

The NivuFlow Mobile 600 measurement principle is based on the detection of the transit time of ultrasonic signals between two sensors (A and B).

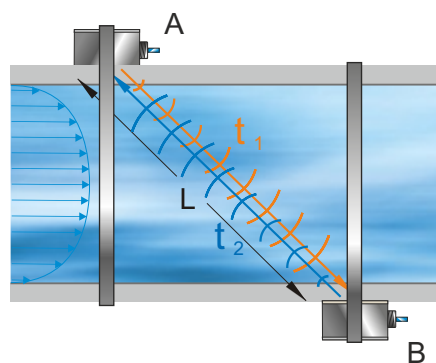

Here, the signal run time in flow direction  $t_1$  is shorter than the signal run time towards the flow direction  $t_2$ . The difference between both run times is proportional to the average flow velocity along the measurement path  $v_m$ . The NivuFlow Mobile 600 computes the average flow velocity  $v_A$  from the measured path velocities  $v_m$ . The flow within the full pipe is calculated by utilising the general continuity equation:


$$Q = A \cdot v_A$$

$A$  = Cross-sectional area  
 $v_A$  = Average flow velocity within cross section



## Easy and convenient operation

The operation of the measurement system is password-protected by using a web browser installed on units such as smartphones, tablets or notebooks. Additional software or special apps are not required. Since the transmitter can be used without the need to open the enclosure it is possible to operate the unit comfortably even under poor conditions or in bad weather. The connection to the unit is set up via WLAN.

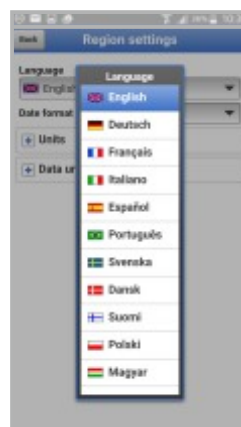



## Contactless or in the Medium

The transit time method based on ultrasound permits reliable and accurate measurements in clean to slightly polluted media.

A wide selection of clamp-on sensors and wedge sensors as well as special pipe sensors is available. The system automatically detects the type of sensor connected.

A key feature of the clamp-on sensors is the very quick installation since the sensors are installed on the outside of the pipe due the contactless measurement principle. Perfectly matched mounting accessories also enable the quick and easy installation of the medium-contacting sensors.

By connecting extra sensors it is possible to additionally measure process parameters such as pressure and temperature at the same time.



Pressure Sensor




Clamp-On Sensor



Pipe Sensor

### Your Benefits

- Contactless or measurement within the medium
- Sensors are absolutely zero point stable and drift-free
- Low installation efforts due to perfectly matched mounting accessories
- Installation under process conditions
- Various sensor types guarantee the best solution for each application
- Stable signal transmission over long distances

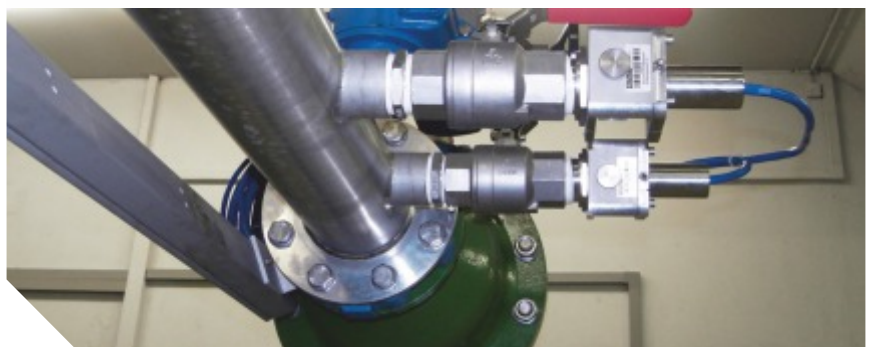




### Tough Performer

The high protection degree of sensors and transmitters (IP68) permits use even under the harshest conditions. Even with its lid open the transmitter features IP 67 protection. The rechargeable batteries can be replaced also in wet environments such as during heavy rain.

### Sophisticated Power Management

The NivuFlow Mobile 600 is designed for long-term operation and easiest handling. Equipped with two rechargeable battery packs the transmitter features a very long service life including simultaneous sensor power supply.

The rechargeable battery packs can be replaced by the user quick and easy on site to operate long-term measurements. This is why extra units or additional battery compartments are not required.

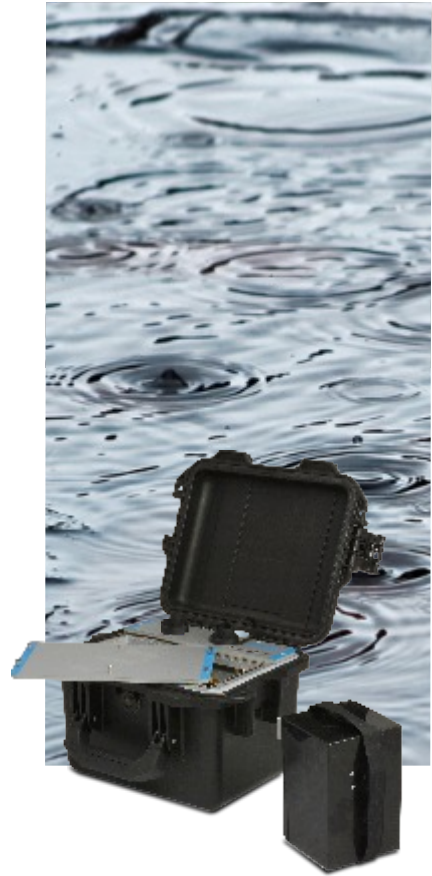

- Up to 250 days of battery life with 5 minutes measurement interval
- NivuFlow can be used also as permanent measurement using a mains battery charger


## On Site from Anywhere

The measurement data can be transmitted via mobile phone network if necessary. The readings are transmitted to a web portal and can be then called up from anywhere in the world.



# Specifications


## Transmitter

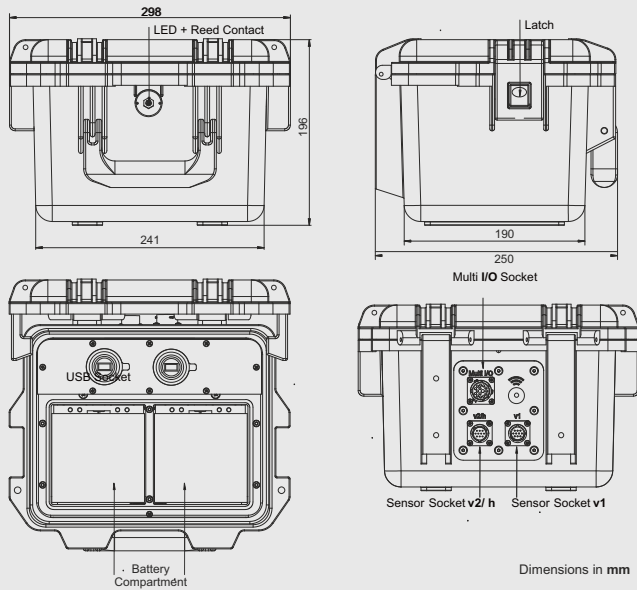

## Transmitter


Measurement principle	Ultrasonic transit time (time of flight)
Power supply	<ul style="list-style-type: none"> <li>• 2 x rechargeable battery 12V/15 Ah, lead gel</li> <li>• Charger 100 - 240 V AC / 50 .. 60 Hz / 50 VA</li> </ul>
Enclosure	<ul style="list-style-type: none"> <li>• Material: HPX high performance synthetic resin</li> <li>• Weight: approx. 2.2 Kg (without batteries and hoop guard)</li> <li>• Protection: IP68 closed / IP67 open</li> </ul>
Operating temperature	-20°C ... +50°C
Storage temperature	-20°C ... +70°C
Max. humidity	90 %, non-condensing
Display	Status LED (RGB)
Operation	Solenoid switch, via WLAN using Smartphone, Tablet, Notebook...
No. of meas. paths	2
Inputs	<ul style="list-style-type: none"> <li>• 2 x 0/4 - 20 mA (active/passive)</li> <li>• 1 x 0/4 -20 mA (passive)</li> <li>• 1 x active digital input</li> <li>• 1 x connection socket for power adapter or alternative power supply</li> </ul>
Outputs	<ul style="list-style-type: none"> <li>• 1 x analog output 0 - 10 V</li> <li>• 1 x potential-free digital output as SPDT / bistable</li> <li>• 1 x USB for value readout via USB stick</li> </ul>
Storage cycle	1 - 60 minutes, time-cyclic or event-based
Data memory	Internal memory, capacity 1.5 years with measurement interval of 5 minutes
Data transmission	<ul style="list-style-type: none"> <li>• via plug-in USB stick</li> <li>• via WLAN</li> <li>• via GPRS, UMTS, LTE</li> </ul>

## Clamp-On Sensor

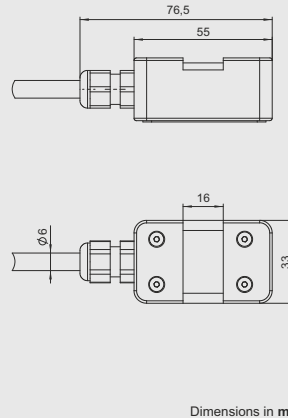

Dimensions in mm

## Pipe Sensors

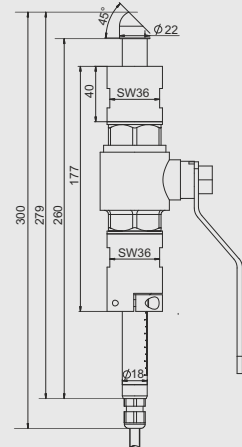

## Sensors

Measurement principle	Ultrasonic transit time (time of flight)
Measurement uncertainty	Flow velocity (v average) within path $\pm 0.1$ % of measurement value
Zero point drift	absolutely zero point stable
Sensor connection	via plug and socket
<b>NIC Clamp-On Sensor</b>	
Measurement range	-10 m/s to +10 m/s
Protection	IP 68
Operating temperature	0°C to +70°C
Storage temperature	-20°C +70°C (non-condensing)
Cable lengths	7 m, other lengths (max.100 m) upon request
Materials	Stainless steel 1.4301 (AISI 304), PEEK
Pipe diameters	100 - 2.500 mm
<b>NIS Pipe Sensor</b>	
Measurement range	-15 m/s to +15 m/s
Protection	IP 68 (front side)
Operating temperature	-20°C to +50°C
Storage temperature	-30°C to +70°C
Operating pressure	max. 16 bar (other pressures upon request)
Cable lengths	10 m, other lengths (max.100 m) upon request
Materials	Stainless steel 1.4571 (AISI 316 Ti), carbon
<b>Accessories</b>	
Display/Operation	IP67-certified 8" outdoor tablet
Power supply	rechargeable battery pack, nominal voltage: 12 V; capacity: 15 Ah, power adapter and battery charger
Fastening system	<ul style="list-style-type: none"> <li>Tensioning system and turnbuckles for sensor fastening</li> <li>hoop guards to protect the connection sockets</li> <li>suspension brackets for fastening on step irons</li> </ul>
Connector Box	for the connection of additional sensors (pressure/temperature)
Pressure transmitter	UniBar E (II) screw-in sensor
Wall thickness meter	to determine the pipe wall thickness

The complete specifications can be found in the according instruction manual or on [www.nivus.com](http://www.nivus.com)

**NIVUS GmbH**  
Head Office  
Im Talle 2  
75031 Eppingen, Germany  
Tel.: +49(0)7262 9191 0  
Fax: +49(0)7262 9191 999  
E-Mail: [info@nivus.com](mailto:info@nivus.com)  
Internet: [www.nivus.de](http://www.nivus.de)

**NIVUS AG**  
8750 Glarus, Switzerland  
Tel.: +41(0)55 6452066  
E-Mail: [swiss@nivus.com](mailto:swiss@nivus.com)  
**NIVUS Austria**  
3382 Loosdorf, Austria  
Tel.: +43 (0)2754 5676321  
E-Mail: [austria@nivus.com](mailto:austria@nivus.com)

**NIVUS Sp. z o.o.**  
81-212 Gdynia, Poland  
Tel.: +48(0)58 7602015  
E-Mail: [poland@nivus.com](mailto:poland@nivus.com)  
**NIVUS France**  
67770 Sessenheim, France  
Tel.: +33(0)3 880716 96  
E-Mail: [france@nivus.com](mailto:france@nivus.com)

**NIVUS Ltd.**  
Head office UK:  
David Miles  
Tel.: +44(0)7834658512  
[david.miles@nivus.com](mailto:david.miles@nivus.com)  
Sales office:  
Andy Kenworthy  
Tel.: +44(0)770375 3411  
[andy.kenworthy@nivus.com](mailto:andy.kenworthy@nivus.com)

**NIVUS Middle East (FZE)**  
Sharjah Free Zone, UAE  
Tel.: +971 6 55 78 224  
[middle-east@nivus.com](mailto:middle-east@nivus.com)  
**NIVUS Korea Co. Ltd.**  
Incheon, Korea 21984  
Tel.: +82 32 209 8588  
E-Mail: [korea@nivus.com](mailto:korea@nivus.com)

**NIVUS Chile**  
Puente Alto, Santiago  
Tel.: +562 2266 8119  
[chile@nivus.com](mailto:chile@nivus.com)  
**NIVUS Vietnam**  
Hanoi  
Tel.: +84 12 0446 7724  
[vietnam@nivus.com](mailto:vietnam@nivus.com)