
Technical Instructions for

Correlation Sensors and external Electronic Box

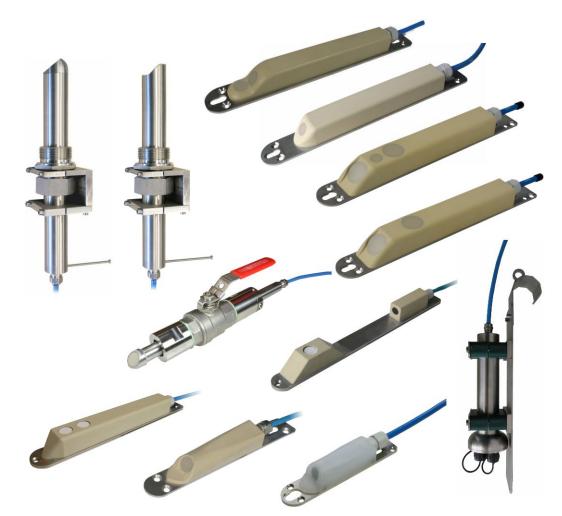

Revised Manual

Document revison 09 / 01.10.2019

Original Technical Instructions:German, rev 09 as of 25.09.2019





Nivus AG

Burgstraße 28 8750 Glarus, Schweiz Phone: +41 (0)55 6452066 Fax: +41 (0)55 6452014 swiss@nivus.com www.nivus.de

NIVUS Austria

Mühlbergstraße 33B 3382 Loosdorf, Österreich Phone: +43 (0) 2754 567 63 21 Fax: +43 (0) 2754 567 63 20 austria@nivus.com www.nivus.de

NIVUS Sp. z o.o., Poland

ul. Hutnicza 3 / B-18 81-212 Gdynia, Polen Phone: +48 (0) 58 7602015 Fax: +48 (0) 58 7602014 biuro@nivus.pl www.nivus.pl

NIVUS France

17, rue du Stade 67870 Bischoffsheim, France Phone: +33 (0)3 88 9992 84 info@nivus.fr www.nivus.fr

NIVUS Ltd., United Kingdom

Wedgewood Rugby Road Weston under Wetherley Royal Leamington Spa CV33 9BW, Warwickshire Phone: +44 (0)8445 3328 83 nivusUK@nivus.com www.nivus.com

NIVUS Middle East (FZE)

Building Q 1-1 ap. 055 P.O. Box: 9217 Sharjah Airport International Free Zone Phone: +971 6 55 78 224 Fax: +971 6 55 78 225 middle-east@nivus.com www.nivus.com

NIVUS Korea Co. Ltd.

#2502 M Dong, Technopark IT Center, 32 Song-do-gwa-hak-ro, Yeon-su-gu, INCHEON, Korea 21984 Phone: +82 32 209 8588 Fax: +82 32 209 8590 korea@nivus.com www.nivus.com

NIVUS Vietnam

21 Pho Duc Chinh, Ba Dinh Hanoi, Vietnam Phone: +84 12 0446 7724 vietnam@nivus.com www.nivus.com

Copyrights and property rights

This document and its contents are proprietary to NIVUS GmbH and are not to be reproduced or copied without the express written permission of NIVUS GmbH. Violations oblige to compensation.



Important Note

This instruction manual may exclusively - even in parts - be copied or translated in any other way with the express written consent of NIVUS GmbH.

Translation

If the device is sold to a country in the European Economic Area (EEA) this Technical Instructions must be translated into the language of the country in which the device is to be used.

Should the translated text be unclear, the original Technical Instructions (German) must be consulted or the NIVUS GmbH contacted for clarification.

Copyright

No part of this publication may be reproduced, transmitted, sold or dis-closed without prior permission. Damages will be claimed for violations. All rights reserved.

Names

The use of general descriptive names, trade names, trademarks and the like in this handbook does not entitle the reader to assume they may be used freely by everyone. They are often protected registered trademarks even if not marked as such.



Change History

Rev.	Date	Changes	Editor
09	01.10.2019	Canges: Chapt. 2.7, Chapt. 4.5.3 Creation: Chapt. 6.6 Corrections: Chap. 3.1, Fig. 4.7, Fig. 4-11, Chapt. 4.3, Fig. 6-2, Fig. 6-3, orthographic mistakes	KG
08	08.03.2019	Complete Revision	KG

Table of contents

Сор	yrights	and property rights3
Cha	nge His	story 4
1	Gener	ral
	1.1 Ap	oplicable documentation8
	1.2 Si	gns and definitions used9
	1.3 Al	obreviations used9
2	Safety	/ Instructions10
	2.1 U	sed symbols and signal words10
	2.2 Sa	afeguards and Precautions11
	2.3 Pe	ersonnel requirements12
	2.4 Ex	x-Approval12
	2.5 In	tended Use13
	2.6 U	sers's Responsibilities14
	2.6.1	Keep Manual14
	2.6.2	Provide Manual14
	2.7 Di	sclaimer15
3	Delive	ery, Storing and Transport16
	3.1 D	elivery16
	3.2 R	eciept16
	3.3 St	oring16
	3.4 Tr	ansport16
	3.5 R	eturn16
4	Produ	ct Specification17
	4.1 Se	ensor Overview17
	4.2 Se	ensor Design and Dimensions19
	4.2.1	Senor Type CSM-V100K19
	4.2.2	Senor CSM-V1D0K
	4.2.3	Sensor CSM-V100R21
	4.2.4	Sensor DSM22
	4.2.5	Electronic Box EBM23
	4.2.6	Sensor POAK
	4.2.7	Sensor POAR
	4.2.8	Sensor OCL
	4.2.9	Sensor CS2K
	4.2.10	Sensor CS2R



5

4.2.11	Sensor CSP	36
4.3 De	evice identification	37
4.4 Se	ensor versions	42
4.4.1	Type Key for Sensor CSM	42
4.4.2	Type Key for Sensor DSM	43
4.4.3	Type Key for Electronic Box EBM	43
4.4.4	Type Key for Sensor POA	44
4.4.5	Type Key for Sensor OCL	45
4.4.6	Type Key for Sensor CS2	46
4.4.7	Type Key for Sensor CSP	47
4.5 Sp	pecification	48
4.5.1	Sensor CSM-V100K	48
4.5.2	Sensor CSM-V1D0K	49
4.5.3	Sensor CSM-V100R	50
4.5.4	Sensor DSM	51
4.5.5	Electronic Box EBM	51
4.5.6	Sensor POA	52
4.5.7	Sensor OCL	53
4.5.8	Sensor CS2	54
4.5.9	Sensor CSP	55
Install	ation	57
5.1 In:	stallation Instructions	57
5.1.1	Electrical Installation	57
5.1.2	Notes on Sensor Installation	58
5.2 M	ounting the protection hose for the sensors CS2 and CSP	59
5.3 Pl	ug wiring and Sensor Cable	60
5.3.1	Sensors CSM and CSP	60
5.3.2	Sensor DSM	60
5.3.3	Electronic Box EBM	61
5.3.4	Sensors POA and CS2	61
5.3.5	Sensor OCL	63
5.4 Ca	able extension	63
5.5 Pr	essure compensation elements	66
5.5.1	General	
5.5.2	Pressure compensation element for CSM and CSP Sensors	
5.5.3	Pressure compensation element for POA- and CS2- sensors	68
5.6 Ta	able of Resistiveness	73
5.6.1	Resistiveness Legend	75

6	Cleaning and Maintenance	.76
	6.1 Basics of Cleaning	.76
	6.2 Cleaning wedge sensors	.76
	6.3 Maintenance wedge sensors	.77
	6.3.1 Wedge Sensors with Pressure Measurement Cell	.77
	6.3.2 Pressure Compensation Element for CSM and CSP Sensors	78
	6.3.3 Pressure Compensation Element for POA and CS2 Sensor	78
	6.4 Cleaning and maintenance sensors OCL and DSM	.80
	6.5 Cleaning and maintenance pipe sensors POA and CS2	.81
	6.6 Cleaning and maintenance pipe senor CSM	.82
	6.7 Installation of Spare Parts and Parts subject to wear and tear	84
	6.8 Customer Service Information	.85
7	Dismantling/Disposal	.86
8	Accessories and Spare Parts	.87
Index	x	.88
Certi	ficates and approvals	.90



1 General



Important

READ CAREFULLY BEFORE USE KEEP IN A SAFE PLACE FOR LATER REFERENCE.

This Technical instruction is an original instruction for Correlation Sensors and external Electronic Box is intended for the initial start-up or the connection of the sensors. This manual is oriented exclusively to qualified expert personnel.

Read this Technical instruction carefully and completely prior to installation and connection since it contains relevant information on this product. Observe the notes and particularly follow the warning notes and safety instructions.

If you should have problems to understand information contained within this Technical Instruction either contact the NIVUS GmbH or one of the distributors for further support. The legally associated companies and subsidiaries of NIVUS group cannot be held responsible for damage to persons or material due to incorrectly understood information in this instruction.

1.1 Applicable documentation

For the installation and operation of the complete system extra instruction manuals or technical descriptions may be required apart from this manual.

- Instruction manual for NivuFlow, NivuFlow Mobile, Nivus Full Pipe, OCM Pro and PCM Pro transmitters.
- Installation Instruction for Correlation and Doppler Sensors
- Installation Instruction for pipe mounting systems
- Instruction manual for Nivus Pipe Profiler (NPP)

These manuals are provided with the auxiliary units or sensors and/or are available as download on the NIVUS homepage.

1.2 Signs and definitions used

Image	Meaning	Remark
⇒	Creoss-reference	Reference to further or detailed information.
>Text<	Parameter or Menu	Indicates a parameter or a menu that is se- lected or described.
Í	Reference to document	Refers to an accompanying documentation.

1.3 Abbreviations used

Colour code for wires and single conductors

The abbreviations of colours, wire and components follow the international colour code according IEC 60757.

BK	black	BN	brown	RD	red
OG	orange	YE	yellow	GN	green
BU	blue	VT	violet	GY	grey
WH	white	PK	pink	TQ	turquoise
GNYE	green/yellow	GD	gold	SR	silver

Article Names

- CSM cross correlation sensor of the Mini sensor family
- DSM air-ultrasonic sensor of the Mini sensor family
- EBM electronic box for the Mini sensor family
- POA cross correlation sensor for full and partial filling
- OCL air-ultrasonic sensor
- CS2 cross correlation sensor for full and partial filling
- CSP cross correlation sensor for full and partial filling



2 Safety Instructions

2.1 Used symbols and signal words



The general warning symbol indicates the risk of personal injuries or death. In the text section the general warning symbol is used in conjunction with the signal words described below

DANGER



Warnings in high degree of risk Indicates a high-risk, imminently hazardous situation which will result in death or serious injury if not avoided.

WARNING



Warnings in medium degree of risk

Indicates a **possible** danger with medium risk which may result in a life-threatening situation or (severe) bodily injury if it is not avoided.

CAUTION

Warnings in low-risk or property damages

Indicates a possible danger with moderate risk which may result in minor or moderate personal injury or material damage if not avoided.

WARNING

Danger by electric voltage



Indicates a hazard with a high risk of electric shock which may result in a life-threatening situation or (severe) bodily injury if it is not avoided.



Important Note

Contains information that should be highlighted. Indicates a potentially damaging situation which can result in a damage of the product or an object in its environment.



Note

Contains information and facts.

2.2 Safeguards and Precautions

Working with NIVUS instruments requires to observe and to follow the safety measures and precautions below generally and at any time. These notes and warnings will not be repeated for each description within the document.

WARNING G



Germ contamination

Please note that due to the operation in the waste water field the measurement system and cables may be loaded with dangerous disease germs. Respective precautionary measures must be taken to avoid damage to one's health.

Wear protective clothing.

WARNING



Installation, mounting, commissioning and maintenance shall be executed by appropriately trained expert personnel. Before starting installation work, observing the work safety regulations need to be checked.

Disregarding may lead in personal injury.

Observe regulations for health and safety at work

WARNING

Do not disable safety devices!

It is strictly prohibited to disable the safety devices or to change the way they work.

Disregarding may lead in personal injury.

WARNING



Check danger through explosive gases

Prior to beginning mounting, installation and maintenance make sure to observe any regulations on safety at work as well as to check the potential risk due to explosive gases.

When working in the channel system make sure to avoid electrostatic charge:

- Avoid unnecessary movements to minimise the risk of static energy accumulating.
- Discharge any possible static electricity from your body before you begin to install sensors.

Disregarding may lead to personal injury or damage your equipment.



2.3 Personnel requirements

Installation, commissioning and maintenance shall be executed only by personnel meeting the demands as follows:

- Expert personnel with relevant training an appropriate qualification
- Personnel authorised by the plant operator



Qualified personnel

within the context of this documentation or the safety notes on the product itself are persons who are sufficiently familiar with installation, mounting, starting up and operation of the product and who have the relevant qualifications for their work; for example:

- I. Training, instruction or authorisation to activate/deactivate, isolate, ground, and mark electric circuits and devices/systems according to the safety engineering standards.
- *II.* Education and instruction according to the standards of safety engineering regarding the maintenance and use of adequate safety equipment.
- III. First aid training

2.4 Ex-Approval

CAUTION Damages invalidate the Ex protection.



Damage might invalidate the Ex protection.

Protect the sensor from shocks, drops or other damage.

The Ex-version of the sensors is designed to be used in areas with explosive atmospheres (zone 1).

Approval ATEX / IECEx

 $\langle \epsilon_x \rangle$ II 2G Ex ib IIB T4 Gb / Ex ib IIB T4 Gb



Important Note

The approval is only valid in connection with the respective indication on the sensors nameplate.

The Ex-version sensors are matched to the NIVUS transmitters regarding the assessment of intrinsically safe electrical systems according to EN 60079-25.

In case of using other manufacturer's transmitters the operator is obliged to implement a system assessment according to EN 60079-25.

The required specifications for Ex-version sensors can be taken from the EC-type examination certificate TÜV 03 ATEX 2262 or TÜV 12 ATEX 087812

2.5 Intended Use



Important Note

The sensors and the Electronic Box are exclusively intended to be used for purposes as described above. Modifying or using the sensors or Electronic Box for other purposes without the written consent of the NIVUS GmbH will not be considered as use in accordance with the requirements.

The legally associated companies and subsidiaries of NIVUS group cannot be held responsible for any damage resulting from improper use. The user alone bears any risk.

Please necessarily observe the maximum permissible limit values as specified in *4.5 Specification*. Any cases varying from these conditions without written consent of NIVUS GmbH are entirely left at owner's risk.

Deviating changes must be approved by NIVUS GmbH in written form.



Note

For installation and commissioning observe the points below:

- declaration of conformity
- test certificates of the respective authorities
- applicable national regulations

Sensor	Measurement	Medium	Area of application	Connection to transmitter
OCL	Level	Air	Part filled flow meas- urement places	NF750, PCM Pro, PCM 4, OCM Pro CF
POA	Flow velocity Level (optional)	Slight to heavily pol- luted	Part filled or full channels, pipes, flumes	NF7, NFP, PCM Pro, PCM 4, OCM Pro CF
CS2	Flow velocity Level (optional)	Slight to heavily pol- luted	Part filled or full channels, pipes, flumes with larger dimensions	NF7, PCM Pro, PCM 4, OCM Pro CF
CSP	Flow velocity Level (optional)	Slight to heavily pol- luted	Part filled or full channels, pipes, flumes with larger dimensions	NFM750
CSM	Flow velocity Level (optional)	Slight to heavily pol- luted	Part filled or full channels, pipes, flumes with low filling levels	Without EBM: NFM750; With EBM: NF7, PCM Pro, PCM 4
DSM	Level	Air	Pipes with small di- mensions	Without EBM: NFM750; With EBM: NF7, PCM Pro, PCM 4



EBM Electronic Box

The Electronic Box Type EBM is conceived to connect the sensors Type CSM and DSM. It contains the detached electronic sensor components and is designed to be connected to Type NivuFlow 750, NivuFlow 7550 PCM Pro, PCM 4 or OCM Pro transmitters.

2.6 Users's Responsibilities



Important Note

In the EEA (European Economic Area) national implementation of the framework directive 89/391/EEC and corresponding individual directives, in particular the directive 2009/104/EC concerning the minimum safety and health requirements for the use of work equipment by workers at work, as amended, are to be observed and adhered to. In Germany e. g. the Industrial Safety Ordinance must be observed.

Make sure to have a local operating permit available and observe the associated conditions. In addition to this you must observe environmental requirements and local laws on the following points:

- Personnel safety (accident prevention regulations)
- Safety of work materials and tools (safety equipment and maintenance)
- Disposal of products (laws on wastes)
- Disposal of materials (laws on wastes)
- Cleaning (cleansing agents and disposal)
- Environmental protection requirements

Connections

Operators shall make sure prior to operating the instrument that during installation and initial start-up the local regulations (such as regulations for electrical connection) are observed.

2.6.1 Keep Manual

Keep this manual in a safe place and make sure it is available for the users of this product at any time.

2.6.2 Provide Manual

This technical description is part of the delivery and must be included with the sensors if they are sold.

2.7 Disclaimer

All legally associated companies and subsidiaries of NIVUS group assume no liability

- for damages owing to **a change** of this document. The legally associated companies and subsidiaries of NIVUS group reserve the right to change the contents of this document and this disclaimer at any time and without any notice.
- for damages to persons or objectsresulting from failure to comply with applicable regulations. For connection, commissioning and operation of the sensors all available information and higher local legal regulations (e.g. in Germany VDE regulations) such as applicable Ex regulations as well as safety requirements and regulations in order to avoid accidents shall be adhered to.
- for damages to persons or objects resulting from improper use. For safety and warranty reasons, all internal work on the instruments beyond from that involved in normal installation and connection, must be carried out only by qualified NIVUS personnel or persons or companies authorised by NIVUS.
- for damages to persons or objects resulting from the use of instruments in technically **imperfect** condition.
- for damages to persons or objects resulting from the use of instruments not in accordance with the requirements.
- for damages to persons or objects resulting from failure to comply with **safety information** contained within this instruction manual.
- for missing or incorrect measurement values or resulting consequential damages due to **improper installation**.



3 Delivery, Storing and Transport

3.1 Delivery

The standard delivery of the correlation sensors contains:

- This technical instructions with the certificate of conformity and Installation Instruction Correlation and Doppler Sensors. Here, all necessary steps to correctly install and to operate the sensors are listed.
- One correlation sensor and one Electronic Box if required as on the delivery note

Check additional accessories depending on your order and by using the delivery note.

3.2 Reciept

Check the packaging for visible damage immediately after receipt. Any possible damage in transit shall be instantly reported to the carrier. Furthermore a written report shall be sent to NIVUS GmbH in Eppingen.

Incomplete deliveries shall be reported in writing either to your local representative or directly to the NIVUS head office in Eppingen within two weeks.



Note

Mistakes cannot be rectified later.

3.3 Storing

Strictly observe the storing conditions below:

- max. temperature: +70 °C (158 °F)
- min. temperature: -30 °C (-22 °F)
- max. humidity: 100%

When storing, protect the sensors from corrosive or organic solvent vapours, radioactive radiation and strong electromagnetic radiation.

3.4 Transport

Protect the sensors from shock and impact loads and vibrations. Use the original packaging for transport.

3.5 Return


In case of a required reshipment return the sensors at customer cost to NIVUS GmbH in Eppingen using the original packaging.

Insufficiently franked shipments will not be accepted.

4 **Product Specification**

4.1 Sensor Overview

The sensors depicted below are designed for connection to NIVUS transmitters. You can find an overview on sensors and the appropriate transmitters in *Fig. 4-1* and *Fig. 4-2*.

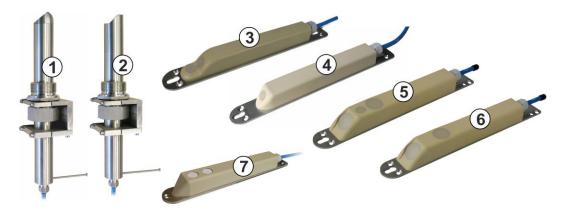


	Sensor	Construc- tion	v-Measure- ment	h-Measurement	NIVUS Transmitter(s)
1	CS2R	Pipe sesnor	Cross correlation	-	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF
2	POAR	Pipe sensor	Cross correlation	Optional: water-ultrasonic	NivuFlow 750, NivuFlow 7550, NFP, PCM Pro, PCM 4, OCM Pro CF
3	POA-V2H1K / POA-V2U1K	Wedge sensor	Cross correlation	Water-ultrasonic or pres- sure measurement + water-ultrasonic	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF
4	POA-V200K / POA-V2D0K	Wedge sensor	Cross correlation	Without or pressure measurement	NivuFlow 750, NivuFlow 7550, (NFP), PCM Pro, PCM 4, OCM Pro CF
5	CS2K	Wedge sensor	Cross correlation	None or pressure measurement or water-ultrasonic or pressure measure- ment + water-ultrasonic	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF
6	CSP	Wedge sensor	Cross correlation	None or pressure measurement or water-ultrasonic or pressure measure- ment + water-ultrasonic	NivuFlow Mobile 750
7	OCL	Wedge sensor	-	Air-ultrasonic	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF

Fig. 4-1

Overview sensors CS2, POA, CSP and OCL



Depending on the transmitter used the Mini family sensors additionally require the EBM Electronic Box. The according information can be found in the overview below.

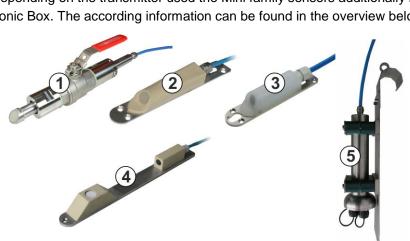


	Sensor / EBM	Construction	v-Measu- rement	h-Measure- ment	NIVUS Transmitter(s)	EBM requi- red
1	CSM-V100R7E	Pipe sensor	Cross corre- lation	-	NivuFlow 750, PCM Pro, PCM 4, OCM Pro CF	x
	CSM-V100RR				NivuFlow Mobile 750	-
2	CSM-V1D0KD	Mini-Wedge Sensor	Cross corre- lation	Pressure mea- surement	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF	x
	CSM-V1D0KP				NivuFlow Mobile 750	-
3	CSM-V100KC	Mini-Wedge Sensor	Cross corre- lation	-	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF	x
	CSM-V100KM				NivuFlow Mobile 750	-
4	DSM-L0B	Mini-Wedge Sensor	-	Air-ultrasonic	NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4, OCM Pro CF	X
	DSM-L0M				NivuFlow Mobile 750	-
5	EBM	Electronic Box				

Fig. 4-2 Overview Mini sensor family

4.2 Sensor Design and Dimensions

4.2.1 Senor Type CSM-V100K

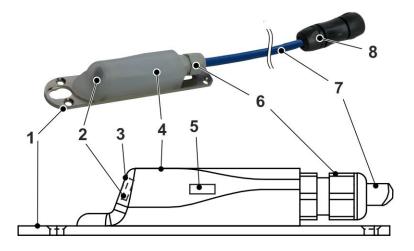

- 1 Ground plate/mounting plate
- 2 Flow velocity sensor
- 3 Acoustic coupling layer
- 4 Sensor body
- 5 Temperature sensor
- 6 Cable gland
- 7 Sensor cable
- 8 Plug with spigot nut

Fig. 4-3 Basic construction sensor CSM-V100K






Fig. 4-4 Dimensions sensor CSM-V100K




4.2.2 Senor CSM-V1D0K

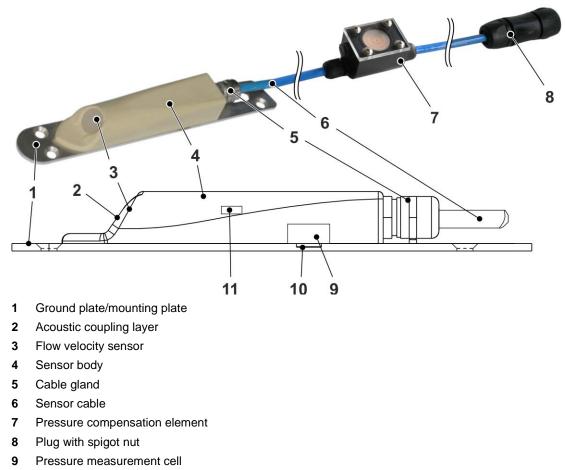

- 10 Duct to pressure measurement
- **11** Temperature sensor




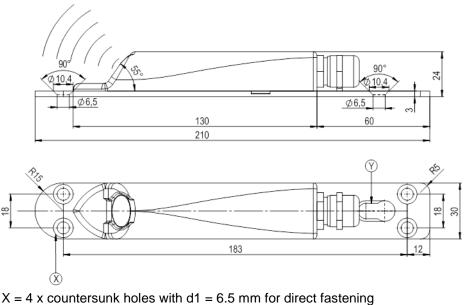


Y = Slotted hole for fastening on pipe mounting system


Fig. 4-6 Dimensions sensor CSM-V1D0K

4.2.3 Sensor CSM-V100R

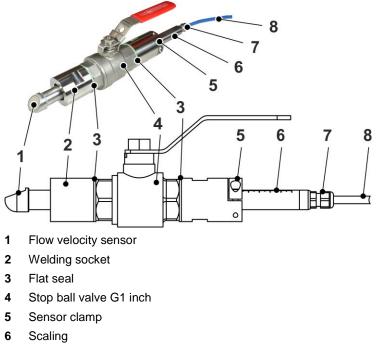

- 7 Cable gland
- 8 Sensor cable



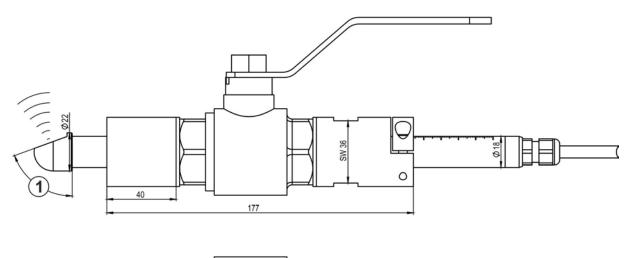



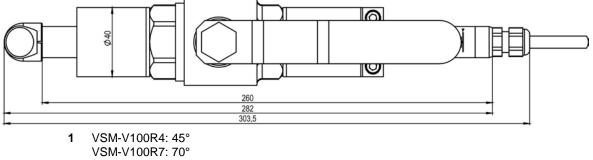


Fig. 4-8 Dimensions sensor CSM-V100R



4.2.4 Sensor DSM

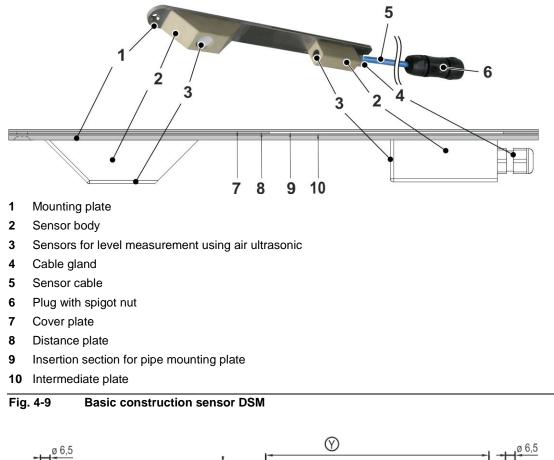

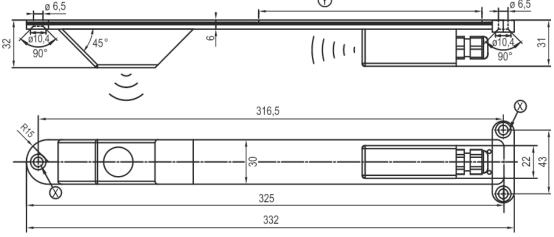


X = Fastening shoe and countersunk hole for direct fastening


Y = Insertion section for pipe mounting plate

Fig. 4-10 Dimensions sensor DSM

4.2.5 Electronic Box EBM

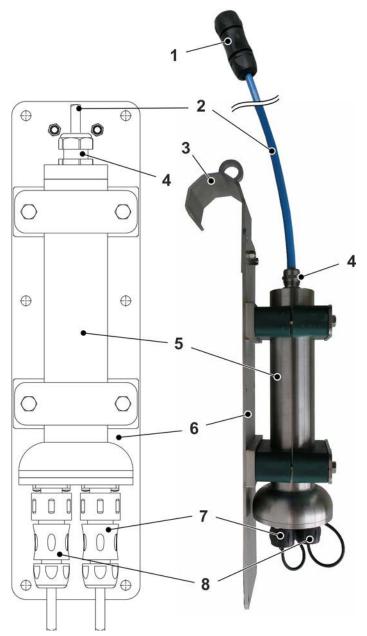

- 1 Plug with spigot nut for connection to PCM Pro or PCM 4 (optional)
- 2 Cable connectione tot he measurement device NivuFlow 750, NivuFlow 7550, PCM Pro, PCM 4 or OCM Pro CF
- 3 Suspension bracket
- 4 Cable gland
- 5 Electronic body
- 6 Ground plate
- 7 Plug for water-ultrasonic sensor, type CSM
- 8 Plug for air-ultrasonic sensor, type DSM






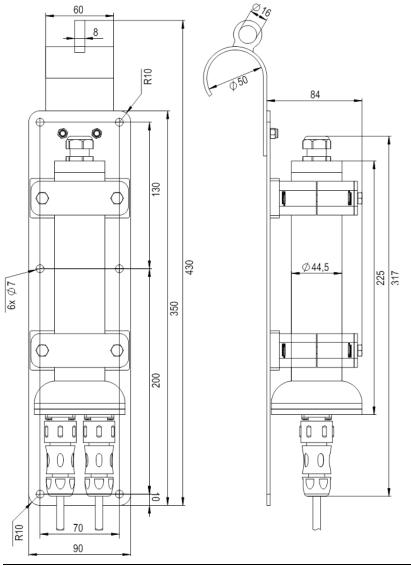


Fig. 4-12 Dimensions Electronic Box EBM

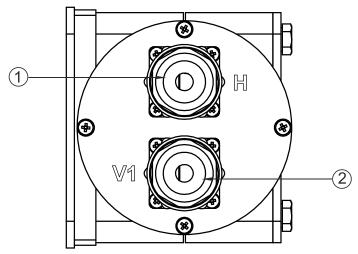

- 1 Socket H for air-ultrasonic sensor DSM
- 2 Socket V1 for flow velocity sensor CSM

Fig. 4-13 Overview soccket wiring electronic box EBM

Lock unused sockets

The desree of protection canot beguaranteed with the sockets unlocked. Disregarding may damage the device.

Each socket is equipped with a cover. Unused sockets must be locked before operation. Keep the sockets oft he Electronic Box free of dirt.


Prior to locking the sockets:


- 1. Clean the sockets with a lint-free cloth.
- 2. Lock unused connection sockets watertight.

Damaged or possibly lost socket covers can be ordered from NIVUS at extra costs.




4.2.6 Sensor POA-....K

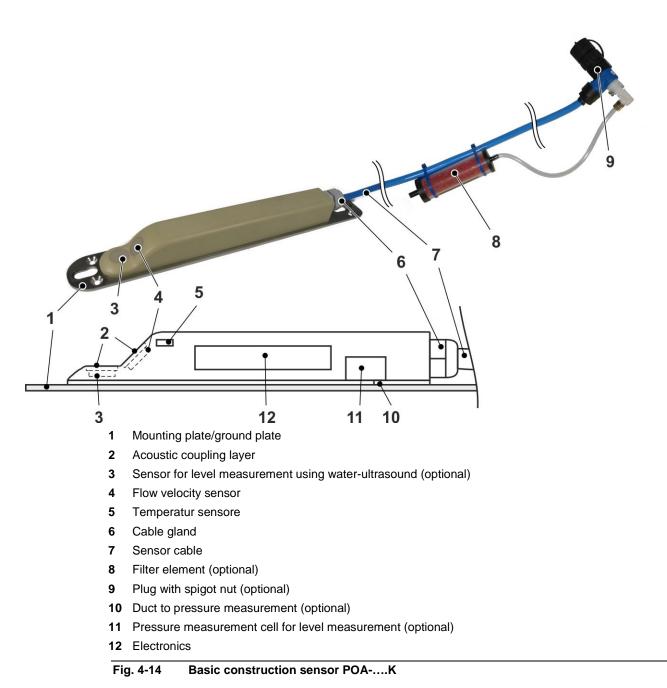

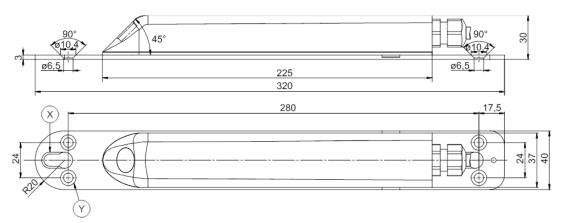

X = Slotted holes for fastening on pipe mounting system Y = 4 x countersunk holes with d1 = 6.5 mm for direct fastening

Fig. 4-15 Dimensions sensor POA-V200K / POA-V2D0K

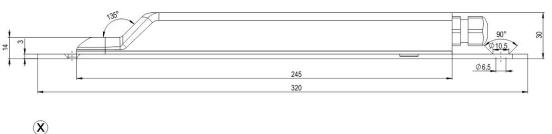




X = Slotted holes for fastening on pipe mounting system

Y = 4 x countersunk holes with d1 = 6.5 mm for direct fastening

Fig. 4-16 Dimensions sensor POA-V2H1K / POA-V2U1K




4.2.7 Sensor POA-....R

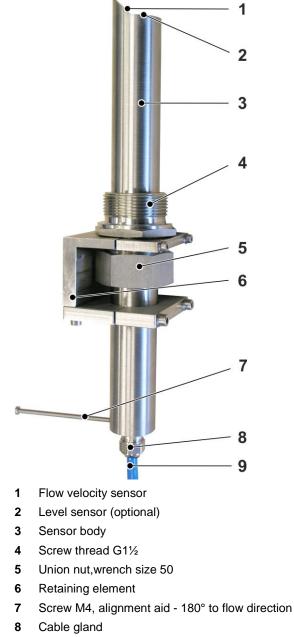

9 Sensor cable




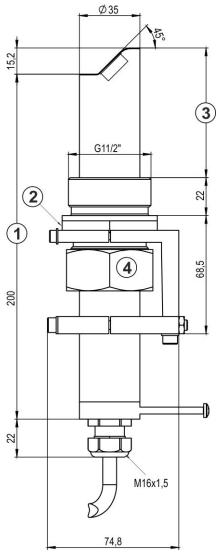

- 1 Minimum length 300 mm for use with stop ball valve
- 2 Wrench size 55
- 3 Movable
- 4 Wrench size 50

Fig. 4-18 Dimensions sensor POA-V200R



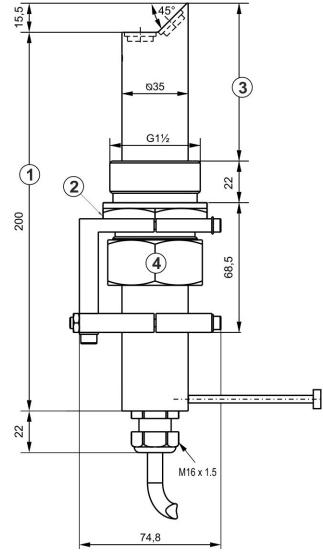

- 1 Minimum length 300 mm for use with stop ball valve
- 2 Wrench size 55
- 3 Movable
- 4 Wrench size 50

4.2.8 Sensor OCL


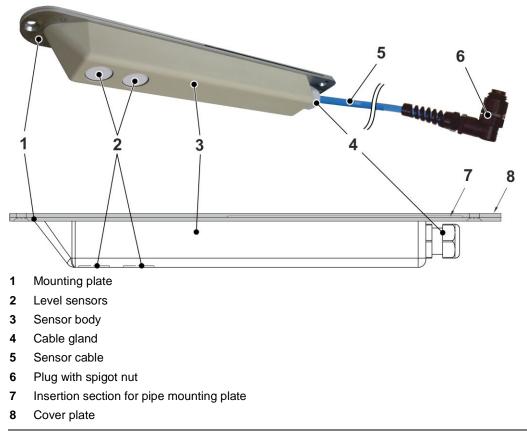


Fig. 4-20 Basic construction sensor OCL

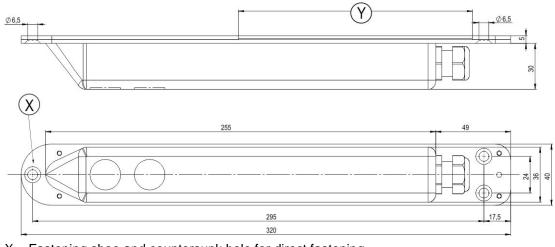


X = Fastening shoe and countersunk hole for direct fastening

Y = Insertion section for pipe mounting plate

Fig. 4-21 Dimensions sensor OCL




4.2.9 Sensor CS2-....K

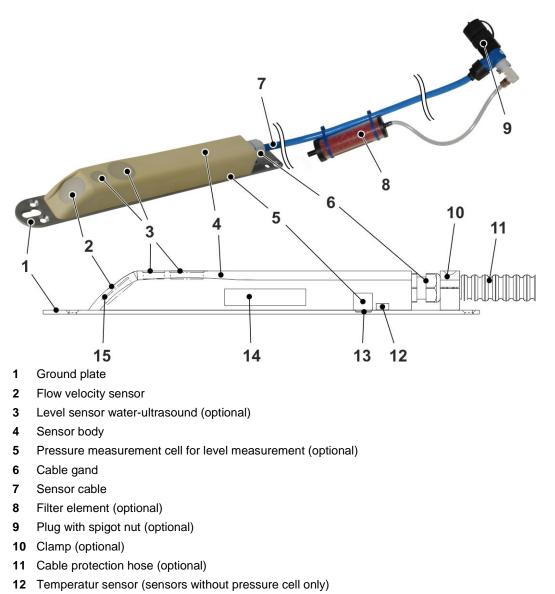


- 13 Pressure measurement cell (optional)
- 14 Electronics
- 15 Acoustic coupling layer



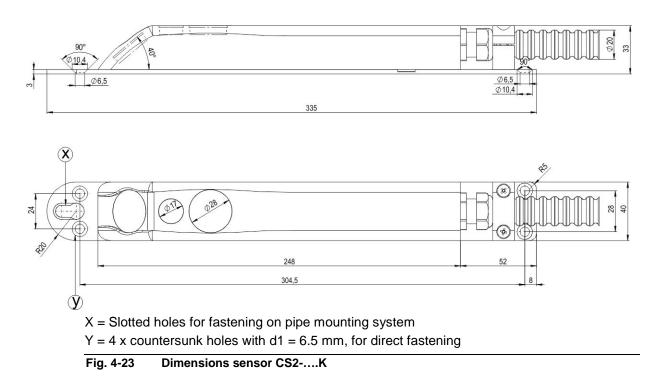




4.2.10 Sensor CS2-....R

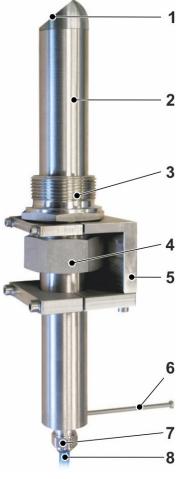


- 1 Flow velocity sensor
- 2 Sensor body
- 3 Screw thread G1¹/₂
- 4 Union nut, wrench size 50
- 5 Retaining element
- 6 Screw M4, alignment aid 180° to flow direction
- 7 Cable gland
- 8 Sensor cable

Fig. 4-24 Basic construction sensor CS2-....R

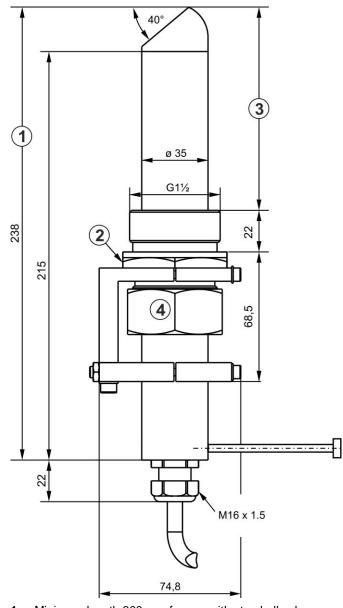


- 1 Minimum length 300 mm for use with stop ball valve
- 2 Wrench size 55
- 3 Movable
- 4 Wrench size 50






4.2.11 Sensor CSP

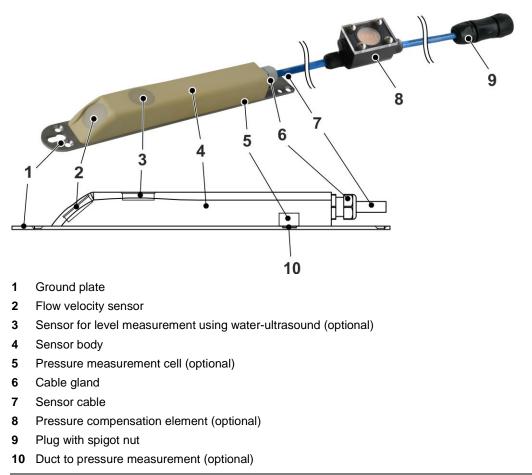



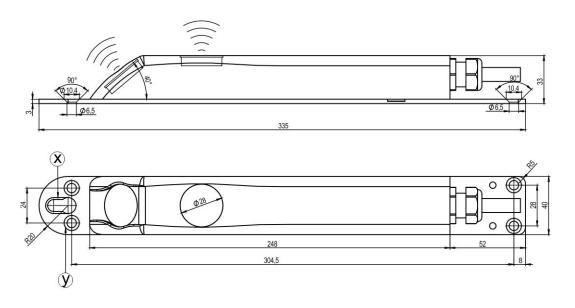

X = Slotted holes for fastening on pipe mounting system Y = 4 x countersunk holes with d1 = 6.5 mm, for direct fastening

Fig. 4-27 Dimensions sensor CSP

4.3 Device identification

The instructions in this manual apply only for the type of sensor or the units depicted on the title page.

The nameplate can be found on the ground plate or the sensor body and contains the following information:

- name and address of manufacturer
- CE label
- type and serial number
- year of manufacture
- Ex label (on Ex-version sensors only) as mentioned in chapter 2.4 Ex-Approval

In case of enquiries and ordering replacement parts it is important to specify article number as well as the serial number of the respective transmitter or sensor. This ensures correct and quick processing.



Note

- Use the nameplate to verify whether the sensor corresponds with your order.
- Use the nameplate to verify whether the correct control number (ATEX) is specified.
- → You can find the EU Declarations of Conformity, the EC-Type-Examination certificates and the IECEx Certificates of Conformity at the end of this manual.

Nameplates



Fig. 4-28 Nameplate sensor CSM-V100K



Fig. 4-29 Nameplate sensor CSM-V1D0K






Fig. 4-30 Ex label for sensor CSM




Fig. 4-31 Nameplate sensor CSM-V100R




Fig. 4-32 Ex nameplate for pipe sensor, type CSM-V100R

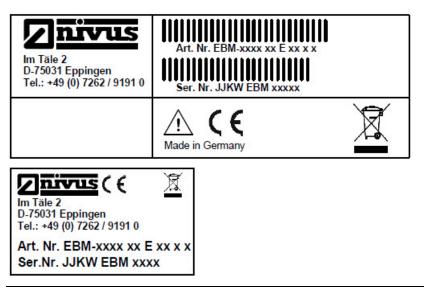


Fig. 4-33 Nameplates Electronic Box, type EBM

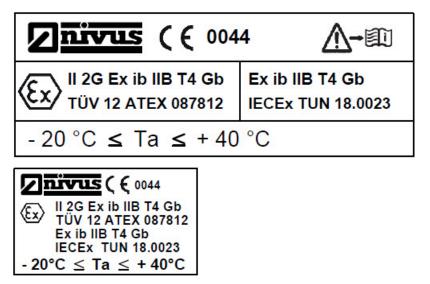


Fig. 4-34 Ex nameplates Electronic Box, type EBM




Fig. 4-35 Nameplate sensor DSM


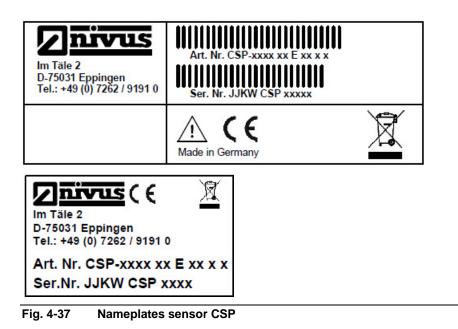


Fig. 4-36 Ex label for sensor DSM





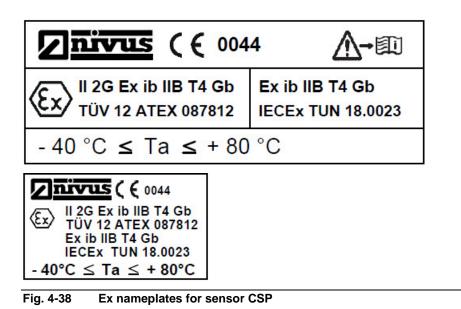




Fig. 4-39 Nameplate sensor POA




Fig. 4-40 Nameplate sensor OCL

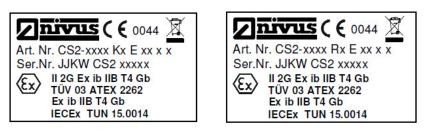


Fig. 4-41 Nameplates sensor CS2



Fig. 4-42 Ex-label for each sensor; type POA, CS2, OCL



4.4 Sensor versions


The sensors are available in various constructions (wedge and pipe sensors) and additionally vary in terms of Ex-Version, cable lengths, sensor connection (cable end for direct connection or configured plug / plug-on filter element) as well as various special versions and materials.

The article number can be found where the cable enters the sensor body as well as on a nameplate on the end of the cable. This nameplate is protected against weathering and abrasion by using a transparent shrunk-on hose.

4.4.1 Type Key for Sensor CSM

CSM-	Sensor Type	r with s	spatial allocation of flow velocities							
	V100	with	out level measurement							
		кт	Wedge sensor made of PVDF; ground plate 1.4571							
		R4		1 [°] pipe sensor made of stainless steel 1.4571 with PEEK sensor						
					ly for N					
		R7	1´´ pi face		nsor ma	ade of stainless steel 1.4571 with PEEK sensor				
		RX	Pipe	senso	r, spec	ial construction				
		хх	Spec	ial con	structi	on				
	V1D0	Leve	l meas	surem	ent wi	th pressure measurement cell				
		КТ	Wedg	ge sen	sor ma	ade of PPO; ground plate 1.4571 (until 2018)				
		KN	Wedg	ge sen	sor ma	ade of PPO; ground plate 1.4571 (as of 2018)				
		ХХ	•		structi					
					(ATE)	()				
			0	none						
			Е	Ex-zo						
					e Leng 7 m	gins				
				15		(only type V1D0)				
						sor Connection				
					С	for wedge sensors, connection to electronic box EBM type RD, incl. plug				
					D	for wedge sensors, connection to electronic box EBM type RD, incl. pressure compensation ele- ment and plug				
					E	for pipe sensors, connection to electronic box EBM type RD, incl. plug				
					м	for wedge sensors; connection to NFM 750, incl. plug				
					Р	for wedge sensors; connection to NFM 750, incl. pressure compensation element and plug				
					R	for pipe sensors; connection to NFM 750, incl. plug				
CSM-]				

4.4.2 Type Key for Sensor DSM

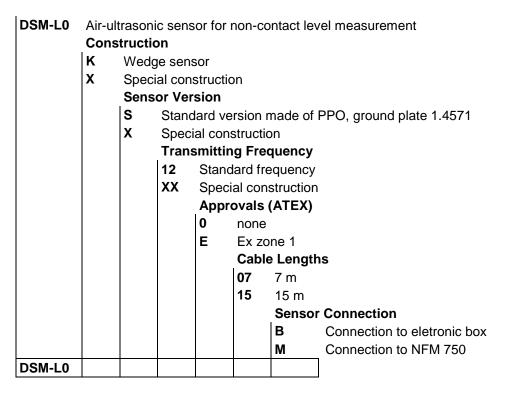

4.4.3 Type Key for Electronic Box EBM

EBM-V1L1	sion	bracke structi Stand Spec	t ans n	nountir onstruc structio	on
		0	none	•	
		Е	Ex zo NF7)	one 1 (only in connection with PCM Pro, OCM Pro CF or
			,	e Lenc	uths (max. 150 m)
			03	3 m	
			10	10 m	
			15	15 m	
			20	20 m	
			30	30 m	
			50	50 m	
			99	100 n	
			XX	-	ial length upon request
					or Connection
				S	Connection to PCM Pro and PCM 4
				K	Cable end pre-configured for connection to NF7 and OCM Pro CF
EBM-V1L1]



4.4.4 Type Key for Sensor POA

POA-		with s	spacial	alloca	tion of flow velocities covering a maximum of 16 scan
	layers				
	Type V200	with			
	V200				asurement
		R I	1.457	-	sor made of PPO with PEEK sensor face; ground plate
		KP	Wedg	ge sen	sor made of high resistant full PEEK; ground plate 1.4571
		кх	Wedg	je sen	sor, special construction (e.g. made of high resistant full ground plate made of Hastelloy or Titanium)
		RT			r made of PPO with PEEK sensor face; pipe body 1.4571
		RP	Pipe	senso	r made of high resistant full PEEK; pipe body 1.4571
		RX	-		r, special construction
	V2H1	with	ultras	ound	from bottom up for level measurement
		кт	Wedo 1.457	-	sor made of PPO with PEEK sensor face; ground plate
		KP	Wedg	ge sen	sor made of high resistant full PEEK; ground plate 1.4571
		кх			sor, special construction (e.g. made of high resistant full ground plate made of Hastelloy or Titanium)
		RT	Pipe	senso	r made of PPO with PEEK sensor face; pipe body 1.4571
		RP	Pipe	senso	r made of high resistant full PEEK; pipe body 1.4571
		RX	Pipe	senso	r, special construction
	V2D0	with	press	ure me	easurement cell for level measurement
		кт	Wedo 1.457		sor made of PPO with PEEK sensor face; ground plate
		KΧ	Wedg	ge sen	sor, special construction
	V2U1		-		easurement cell and ultrasound from bottom up for
		1	meas		
		кт	1.457	-	sor made of PPO with PEEK sensor face; ground plate
		КΧ	Wedg	ge sen	sor, special construction
			Appr	ovals	(ATEX)
			0	none	
			E	Ex zo	
				1	e Lengths (max 150 m / with pressure cell up to 30 m)
				10	10 m
				15	15 m
				20	20 m
				30	30 m
				50 00	50 m 99 m
				99 XX	
				1B	Special length upon request 10 m, FEP coated*
				2B	20 m, FEP coated*
				3B	30 m, FEP coated*
				5B	50 m, FEP coated*
				9B	100 m, FEP coated*
				XB	Special lenth / special construction*
I	I	I	1	-	1

	Sen	sor Co	onnection
	К	-	/pes V20 and V2H: cable end pre-configured onnection to OCM Pro CF; NF7, NFP
	L	-	/pes V2D und V2U: cable end pre-configured onnection to OCM Pro CF; NF7
	F	and	pes V2D und V2U: connection to PCM Pro PCM 4, portable version incl. plug and ex- geable filter element
	S		/pes V20 and V2H: connection to PCM Pro PCM 4, portable version incl. plug
		Pipe	Length
		0	Only for wedge sensor
		2	20 cm
		3	30 cm
		4	40 cm
		x	Special pipe length in dm
		G	20 cm + extension thread
POA-			

* Cable not possible for types V2D0 and V2U1

4.4.5 Type Key for Sensor OCL

OCL-L1	Activ	ve air-u	Itrason	ic ser	nsor							
	Con	Construction										
	Κ	K Wedge sensor										
	Х	Special construction										
		Sens	or Ve	rsion								
		S	Stand	dard v	version	made c	of PPO, cable :PUR					
		X	Spec	ial co	nstructi	on						
			Tran	smitti	ing Fre	quency	y					
			12	120	kHz							
			ХХ	Spe	cial cor	nstructio	n					
				Approvals (ATEX)								
				0 none								
				Е	Ex zo	one 1						
					Cabl	e Leng	ths (max. 150 m)					
					10	10 m						
					15	15 m						
					20	20 m						
					30	30 m						
					50	50 m						
					99	100 n	1					
					XX	Speci	al length upon request					
						Sens	or Connection					
						К	Cable end pre-configured for connec- tion to OCM Pro CF and NF 750					
						S	Connection plug for PCM Pro and PCM 4					
OCL-L1]					




4.4.6 Type Key for Sensor CS2

CS2-	Correla	tion se	ensor f	ür large	e dime	nsions	
	Types						
	V100			el mea			
		RP	•			-	n resistant full PEEK; pipe body 1.4571
		RX	•		•		truction
		SP				-	resistant full PEEK; pipe material 1.4571
	V200	1		el mea			
		КТ	1.457		sor ma		PO with PEEK sensor face; ground plate
	V2H1	with u	ultrasc	ound f	rom be	ottom	up for level measurement
		КТ	Wedg 1.457		sor ma	de of F	PO with PEEK sensor face; ground plate
	V2D0	with	oressu	ıre me	asure	ment o	ell for level measurement
		кт	Wedg 1.457		sor ma	de of F	PO with PEEK sensor face; ground plate
	V2U1		oressu			ment o	ell and ultrasound from bottom up for
		KT				de of F	PO with PEEK sensor face; ground plate
			1.457				
			Appro	ovals (ATEX)	
			0	none			
			Е	Ex zo	-		
				1	-	ths (m	ax 150 m / with pressure cell up to 30 m)
				10	10 m		
				15	15 m		
				20	20 m		
				30 50	30 m 50 m		
				99	99 m		
				XX		al lend	th upon request
					•	-	inection
					К		pes V20 and V2H: connection to Pro CF and NF7
					L	for typ	pes V2D und V2U: connection to Pro CF and NF7
					R	for typ	pes V100R (pipe sensors): connection to Pro CF and NF7
					F		bes V2D und V2U: connection to PCM Pro
							CM 4, incl. plug and exchangeable filter
					S		bes V20 and V2H: connection to PCM Pro CM 4, incl. plug
							Length
						0	only for wedge sensor
						2	20 cm (standard)
						3	30 cm
						4	40 cm
						Х	Special pipe length in dm
000						G	20 cm + extension thread
CS2-							

4.4.7 Type Key for Sensor CSP

CSP-						
	Туре					
	V200	witho	out lev	el mea	asuren	nent
		КТ	-			de of PPO with PEEK sensor face;
			•	•	te 1.4	
	V2H1	1				ottom up for level measurement
		КТ	-			de of PPO with PEEK sensor face;
			0	•	te 1.4	
	V2D0	1				ment Cell for level measurement
		KT	•			de of PPO with PEEK sensor face;
			•		te 1.4	
	V2U1		Pressi measi			ment Cell and ultrasound from bottom up for
		кт				de of PPO with PEEK sensor face; ground plate
			1.457			
			Approvals (ATEX)			
			0	none		
			Е	with A	ATEX a	approval
				Cable	e Leng	th
				7	7 m	
				15	15 m	
				20	20 m	
						or Connection
					F	for types V2D0 und V2U1: connection to
						NFM 750, incl. plug and pressure compensation element
					S	for types V200 und V2H1:connection to
						NFM 750, incl. plug
CSP-						





4.5 Specification

4.5.1 Sensor CSM-V100K

Measurement principle	Correlation with real flow profile measurement
Measurement min.fill level	3 cm
Measurement frequency	1 MHz
Protection	IP68
Ex-Approval (optional)	II 2G Ex ib IIB T4 Gb (Atex) Ex ib IIB T4 Gb (IEC Ex)
Operating temperature	-20 °C to +70 °C (-4 °F to 158 °F) at 15 min. operation time -20 °C to +65 °C (-4 °F to 149 °F) at continuous operation -40 °C to +80 °C (-40 °F to 176 °F) for applications in Ex Zone 1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	Max. 4 bar
Cable length	7/15 m, for connection to Electronic Box / NFM 750
Type of cable	LiYC11Y Twinax 2x AWG20/7 + 3x AWG28/7
Outside cable diameter	6 mm +/- 0,2 mm
Medium contacting materials	Polyurethane, PVDF, stainless steel 1.4571, PA
Flow velocity measurement	
Measurement range	-100 cm/s to +600 cm/s
Number of scan layers	Max. 16
Zero point drift	Absolutely stable zero point
Error limits (per scan layer)	< 1% of measurement value (v > 1m/s) < 0.5% of measurement value +5 mm/s (v <1 m/s)
Sonic beam angle	±5 degrees
Beam angle to the horizontal	20°
Temperature measurement	
Measurement range	-40 °C up to +80 °C (-40 °F to 176 °F)
Measurement uncertainty	±0,5 K

4.5.2 Sensor CSM-V1D0K

Measurement principle	Correlation with real flow profile measurement
Measurement min.fill level	5.5 cm
Measurement frequency	1 MHz
Protection	IP68
Ex-Approval (optional)	II 2G Ex ib IIB T4 Gb (ATEX)
	Ex ib IIB T4 Gb (IEC Ex)
Operating temperature	-20 °C to +50 °C (-4 °F to 122 °F)
	-40 °C to +80 °C (-40 °F to 176 °F) for applications in
	Ex Zone 1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	Max. 1 bar
Cable length	7/15 m, for connection to Electronic Box / NFM 750
Type of cable	LiYC11Y 1x (2x AWG24/7 CAT 7) + PA 1,5/2,5mm + (4x AWG26/7)
Outside cable diameter	9 mm +/- 0,25 mm
Medium contacting	Polyurethane, stainless steel 1.4571, PPO GF30, PA,
materials	Pressure compensation element: POM-C, PMMA, PA, stain- less steel 1.4571
Flow velocity measurement	
Measurement range	-100 cm/s to +600 cm/s
Number of scan layers	Max. 16
Zero point drift	Absolutely stable zero point
Error limits	< 1% of measurement value (v > 1m/s)
(per scan layer)	< 0.5% of measurement value +5 mm/s (v <1 m/s)
Sonic beam angle	±5 degrees
Beam angle to the horizontal	35°
Level measurement - Pressur	re
Measurement range	0 to 500 cm
Zero point drift	Max. 0.75% of final value (0–50 °C)
Measurement uncertainty	<u><</u> 0.5% of final value
Temperature measurement	
Measurement range	-40 °C up to +80 °C (-40 °F to 176 °F)
Measurement uncertainty	±0,5 K



4.5.3 Sensor CSM-V100R

r	
Measurement principle	Correlation with real flow profile measurement
Measurement frequency	1 MHz
Protection	IP68
Ex-Approval (optional)	II 2G Ex ib IIB T4 Gb (ATEX)
	Ex ib IIB T4 Gb (IECEX)
Operating temperature	-40 °C to +80 °C (-40 °F to 176 °F)
	-40 °C to +80 °C (-40 °F to 176 °F) for applications in Ex Zone 1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	max. 16 bar
Cable length	7/15 m
Type of cable	LiYC11Y Twinax 2x AWG20/7 + 3x AWG28/7
Outside cable diameter	6 mm ±0.2 mm
Types of construction	Pipe sensor for installation in pipes with sensor screw joint and retaining element
Medium contacting materials	Polyurethane, stainless steel 1.4571, PEEK, o-ring made of NBR
Measurement range	-100 cm/s to +600 cm/s
Number of scans	Max. 16
Zero point drift	Absolutely stable zero point
Error limits	< 1% of measurement value (v > 1m/s)
(per scan layer)	< 0.5% of measurement value +5 mm/s (v <1 m/s)
Minimum filling level	3,0 cm
Sonic beam angle	±5 degrees
Beam angle to the hori-	CSM-V100R7: 20°
zontal	CSM-V100R4: 45°

4.5.4 Sensor DSM

Measurement principle	Ultrasonic transit time
Measurement frequency	125 kHz / 200 kHz
	IP68
Protection rating	
Ex-Approval	II 2G Ex ib IIB T4 Gb (ATEX),
	Ex ib IIB T4 Gb (IEC Ex)
Operating temperature	-20 °C to +80 °C (-4 °F to 176 °F)
	-40 °C to +80 °C (-40 °F to 176 °F) for applications in
	Ex Zone 1
Storage temperature	-30 °C to +70° C (-22 °F to 158 °F)
Operating pressure	max. 1 bar
Cable length	7/15 m for connection to Electronic Box / NFM 750
Type of cable	LiYC11Y 2x (2x28 AWG/7-(ST)12Y)+4x28 AWG/7
Outside cable diameter	6,7 mm +/- 0,25 mm
Medium contacting materials	Polyurethane, stainless steel 1.4571, PPO GF30, PA
Level measurement	
Measurement range	0 to 200 cm (0 to 6.56 ft)
Dead zone	4 cm (1.57 in)
(as from ground plate)	
Measurement uncertainty	< ±5 mm
Temperature measurement	
Measurement range	-40 °C to +80 °C (-40 °F to 176 °F)
Measurement uncertainty	±0.5 K

4.5.5 Electronic Box EBM

Protection rating	IP68 (with connection sockets locked)
Ex-Approval	II 2G Ex ib IIB T4 Gb (Atex),
	Ex ib IIB T4 Gb (IEC Ex)
Operating temperature	-20 °C to +50 °C (-4 °F to 122 °F)
	-20 °C to +40 °C (-4 °F to 104 °F) for applications in Ex Zone 1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	Max. 1 bar
Cable length	3/10/20/30/50/100 m
Type of cable	LiYC11Y 2x1.5 + 1x2x0.34
Outside cable diameter	8.4 mm ±0.25 mm
Medium contacting materials	Polyurethane, stainless steel 1.4571, PP



4.5.6 Sensor POA

Measurement principle	- Ultrasonic transit time (level)
measurement principle	 Piezo-resistive pressure measurement (level)
	- Correlation with real flow profile measurement
Measurement frequency	1 MHz
Protection	IP68
Ex-Approval (optional)	II 2G Ex ib IIB T4 Gb (ATEX)
	Ex ib IIB T4 Gb (IECEX)
Operating temperature	-20 °C to +50 °C (-4 °F to 122 °F)
	-20 °C to +40 °C (-4 °F to 104 °F) for applications in Ex Zone 1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	Max. 4 bar (combi sensor with pressure element max. 1 bar)
Cable length	10/15/20/30/50/100 m for sensors without plug (sensor connec- tion type "K" and "L") extendable up to 250 m max. (820 ft). Using sensors with integrated pressure measurement cell (Level measurement, type V2D0 und V2U1) requires to use a pressure compensation element after a cable length of 30 m (99 ft). Ele- ment may also be used to connect extension.
Type of cable	 Combi sensors with pressure measurement: LiYC11Y 2x1.5 + 1x2x0.34 + PA 1.5/2.5 Sensors without pressure measurement: LiYC11Y 2x1.5 + 1x2x0.34
Outside cable diameter	 Combi sensors with pressure measurement: 9.75 mm ±0.25 mm Sensors without pressure measurement: 8.40 mm ±0.25 mm
Sensor types	 Flow velocity sensor with v-measurement using cross correlation and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via water ultrasonic and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via pressure and temperature measurement to compensate the temperature effect on the velocity of sound (wedge sensor only). Combi sensor with flow velocity sensor using cross correlation, level measurement via water ultrasonic as well as redundant pressure measurement and temperature measurement to compensate the temperature effect on the velocity of sound (wedge sensor only).
Types of construction	 Wedge sensor for installation on channel bottom Pipe sensor for installation in pipes with sensor screw joint and retaining element or for installation in floats
Medium contacting materials	Polyurethane, stainless steel 1.4571, PPO GF30, PA (wedge sensor only), PTFE (pipe sensors only) Option: sensor made of PEEK, resistant against chemical sub- stances, Hastelloy® C-276 mounting plate, Titanium mounting plate, FEP coated cable

Flow velocity measurment	
Measurement range	-100 cm/s to +600 cm/s
Number of scans	Max. 16
Zero point drift	Absolutely stable zero point
Error limits	< 1% of measurement value (v > 1m/s)
(per scan layer)	< 0.5% of measurement value +5 mm/s (v <1 m/s)
Minimum filling level	6,5 cm
Sonic beam angle	±5 degrees
Beam angle to the horizontal	45°
Level measurement – Water	ultrasonic
Measurement range	0 to 200 cm (0 to 6.56 ft);
	lowest absolutely measurable level 5 cm (0.164 ft)
Zero point drift	Absolutely stable zero point
Measurement uncertainty	< ±2 mm
Level measurement - Pressurement - Press	re
Measurement range	0 to 500 cm
Zero point drift	Max. 0.75% of final value (0–50 °C)
Measurement uncertainty	<u><</u> 0.5% of final value
Temperature measurement	
Measurement range	-20 °C to +50 °C (-4 °F to 122 °F)
Measurement uncertainty	±0.5 K

4.5.7 Sensor OCL

Ultrasonic transit time
120 kHz
IP68
II 2G Ex ib IIB T4 Gb (ATEX)
Ex ib IIB T4 Gb (IECEX)
-20 °C to +50 °C (-4 °F to 122 °F) -20 °C to +40 °C (-4 °F to 104 °F) for applications in Ex Zone 1
-30 °C to +70 °C (-22 °F to 158 °F)
Max. 1 bar
10/15/20/30/50/100 m
LiYC11Y 2x1.5 + 1x2x0.34
8.4 mm ±0.25 mm
Wedge sensor for installation in channel vertex
Polyurethane, stainless steel 1.4571, PPO GF30, PA
To 200 cm (to 6.56 ft)
14 cm (5.51 in)
< ±0.5% of final value
-20 °C to +50 °C (-4 °F to 122 °F)
±0.5 K



4.5.8 Sensor CS2

Measurement principle	 Ultrasonic transit time (level) Piezo-resistive pressure measurement (level) Correlation with digital pattern detection (flow velocity)
Measurement frequency	1 MHz
Protection	IP68
Ex-Approval (optional)	II 2G Ex ib IIB T4 Gb (ATEX) Ex ib IIB T4 Gb (IECEX)
Operating temperature	-20 °C to +50 °C (-4 °F to 122 °F) -20 °C to +40 °C (-4 °F to 104 °F) for applications in Ex Zone 1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	max. 4 bar (combi sensor with pressure element max. 1 bar)
Cable length	10/15/20/30/50/100 m for sensors without plug (sensor connec- tion type "K" and "L") extendable up to 250 m max. (820 ft). Using sensors with integrated pressure measurement cell (lev- el measurement, type V2D0 und V2U1) requires to use a pres- sure compensation element after a cable length of 30 m (99 ft). Element may also be used to connect extension.
Type of cable	 Combi sensors with pressure measurement: LiYC11Y 2x1,5 + 1x2x0,34 + PA 1,5/2,5 Sensors without pressure measurement: LiYC11Y 2x1,5 + 1x2x0,34
Outside cable diameter	 Combi sensors with pressure measurement: 9.75 mm ±0.25 mm Sensors without pressure measurement: 8.4 mm ±0.25 mm
Sensor types	 Flow velocity sensor with v-measurement using cross correlation and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via water ultrasonic and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via pressure and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via pressure and temperature measurement to compensate the temperature effect on the velocity of sound (only for wedge sensors). Combi sensor with flow velocity sensor using cross correlation, level measurement via water ultrasonic as well as redundant pressure measurement and temperature measurement to compensate the temperature effect on the velocity of sound (only for wedge sensors).
Types of construction	 Wedge sensor for installation on channel bottom or channel wall Pipe sensor for installation in pipes with sensor screw joint and retaining element
Medium contacting materials	Polyurethane, stainless steel 1.4571, PPO GF30, PEEK, PA6

Flow velocity measurement	
Measurement range	-100 cm/s to +600 cm/s (-3.28 fps to 19.7 fps)
Number of scans	Max. 16
Zero point drift	Absolutely stable zero point
Error limits	< 1% of measurement value (v > 1m/s)
(per scan layer)	< 0.5% of measurement value +5 mm/s (v <1 m/s)
Minimum filling level	8,0 cm
Sonic beam angle	±5 degrees
Beam angle to the horizontal	50°
Level measurement – Water	ultrasonic
Measurement range	0 to 500 cm (0 to 16.4 ft), lowest absolutely measurable level 8 cm (0.26 ft) (only for wedge sensors)
Measurement uncertainty	< ±2 mm
Level measurement – Pressu	re
Measurement range	0 to 500 cm
Zero point drift	max. 0.75% of final value (0–50 °C)
Measurement uncertainty	<u><</u> 0.5% of final value
Temperature measurement	
Measurement range	-20 °C to +50 °C
Measurement uncertainty	±0.5 K

4.5.9 Sensor CSP

Measurement principle	- Ultrasonic transit time (level)
	- Piezo-resistive pressure measurement (level)
	- Correlation with digital pattern detection (flow velocity)
Measurement frequency	1 MHz
Protection	IP68
Ex-Approval (optional)	II 2G Ex ib IIB T4 Gb (ATEX)
	Ex ib IIB T4 Gb (IECEX)
Operating temperature	-40 °C to +80 °C (-40 °F to 176 °F)
	-40 °C to +80 °C (-40 °F to 176 °F) for applications in Ex Zone
	1
Storage temperature	-30 °C to +70 °C (-22 °F to 158 °F)
Operating pressure	Max. 4 bar (combi sensor with pressure element max. 1 bar)
Cable length	7/15/20 m
	Sensors with integrated pressure measurement cell (level
	measurement, type V2D0 und V2U1) ist are equipped with a
	pressure compensation element after 14 m / 19 m (45.93 ft /
	62.34 ft).
Type of cable	Combi sensors with/without pressure measurement:
	LiYC11Y 2x(2x AWG24/7-CAT7) + PA 1,5/2,5 + (4x AWG26/7)
Outside cable diameter	Combi sensors with/without pressure measurement: 9.7 mm ±0.2 mm



Sensor types	 Flow velocity sensor with v-measurement using cross correlation and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via water ultrasonic and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via pressure and temperature measurement to compensate the temperature effect on the velocity of sound. Combi sensor with flow velocity sensor using cross correlation, level measurement via pressure and temperature measurement to compensate the temperature effect on the velocity of sound (only for wedge sensors). Combi sensor with flow velocity sensor using cross correlation, level measurement via water ultrasonic as well as redundant pressure measurement and temperature measurement to compensate the temperature effect on the velocity of sound (only for wedge sensors).
Types of construction	 Wedge sensor for installation on channel bottom or channel wall
Medium contacting materials	Polyurethane, stainless steel 1.4571, PPO GF30, PEEK, PA6
Flow velocity measurement	
Measurement range	-100 cm/s to +600 cm/s (-3.28 fps to 19.7 fps)
Number of scans	Max. 16
Zero point drift	Absolutely stable zero point
Error limits	< 1% of measurement value (v > 1m/s)
(per scan layer)	< 0.5% of measurement value +5 mm/s (v <1 m/s)
Minimum filling level	8 cm
Sonic beam angle	±5 degrees
Beam angle to the horizontal	50°
Level measurement – Water	ultrasonic
Measurement range	0 to 500 cm (0 to 16.4 ft), lowest absolutely measurable level 8 cm (0.26 ft)
Measurement uncertainty	< ±2 mm
Level measurement - Press	ire
Measurement range	0 to 500 cm
Zero point drift	Max. 0.75% of final value (0–50 °C)
Measurement uncertainty	<0.5% of final value
Measurement uncertainty Temperature measurement	

5 Installation

WARNING



Check for explosive atmosphere using a gas warner When connecting the sensor to the transmitter the metal sensor ground plate must not

exceed 1 G Ω grounding resistance!

In this case make sure to eliminate the risk of explosive atmospheres by using a gas warning unit prior to installation or maintenance works. Please observe to avoid building up electrostatic energy during the works!

5.1 Installation Instructions

During installation observe the hints below relating to ESD and mounting place.

- Observe appropriate installation.
- Follow applicable legal or operational guidelines.

Inappropriate use may result in injuries and/or damage on instruments!



Important Note

Observe the following hints on how to avoid electrostatic discharge (ESD).

The sensitive electronic components inside the sensor may get damaged by static electricity. The manufacturer recommends the following steps to prevent the device from getting damaged due to electrostatic discharge:

- Discharge static electricity from your body before touching the instrument's electronic components.
- Avoid unnecessary movements to reduce the risk of building up static electricity.

5.1.1 Electrical Installation

WARNING

Disconnect the unit from mains power

All work on electrical connections may only be carried out with the supply voltage turned off.

Observe electrical data specified on the nameplate.

For electric installation the regulations in the respective countries must be referred to.



5.1.2 Notes on Sensor Installation



Leakage due to removing components

Removing or loosening from ground plate or cable gland result in leakage and therefore will cause measurement and sensor failure.

Do absolutely **not remove any parts** of the sensor! Otherwise warranty as well as Ex protection will expire!

The installation of the sensors is described in the separately *Installation Instruction Correlation and Doppler Sensors*.

Please refer to:

- selecting sensor positions
- required calming sections
- sensor installation and fastening
- cable layout

Please anyway observe the hints on sensors with integrated pressure cell in this manual (chapter 5.5 Pressure compensation elements).

5.2 Mounting the protection hose for the sensors CS2 and CSP


It is possible to optionally install a cable protection hose on the sensor. The following accessories are required:

- 1 cable protection hose with a length of 0.5 m / 1.0 m / 3.0 m
- 1 clamp
- 4 screws

These accessories are available on request.

Procedure:


1. Fasten the bottom part of the clamp on the ground plate by using 2 screws

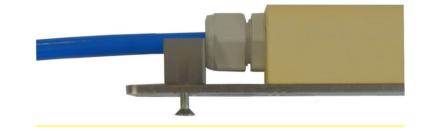

2. Pull the cable protection hose over the sensor cable and put it into the clamp




3. Put on the top part of the clamp and fasten it

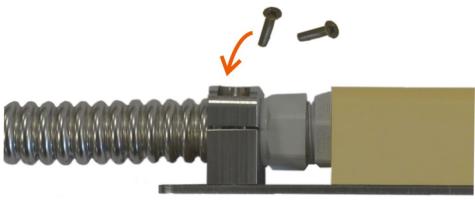



5.3 Plug wiring and Sensor Cable

5.3.1 Sensors CSM and CSP




- Piezo V1 +
- В Piezo V1 -

А

- С Piezo V2 +
- D Piezo V2 -
- Е Pressure_Temp._GND
- F Temp.-Signal_WUS
- G Pressure_RxTx -
- Pressure RxTx + Н
- Pressure_Temp._WUS_V + J
- Κ Cable shield






- Piezo V1 + А
- В Piezo V1 -
- С Piezo V2 +
- D Piezo V2 -
- Е Pressure_Temp_GND F
 - Temp.-Signal_WUS
- G Pressure_RxTx -
- Н Pressure_RxTx +
- J Pressure_Temp._WUS_V +
- κ Cable shield


Fig. 5-2 Plug wiring sensors CSM und CSP; connection to NFM 750

5.3.2 Sensor DSM





Piezo 125k + А

- В Piezo 125k -
- С Piezo 200k +
- D Piezo 200k -
- Е Pressure_Temp._GND
- F Temp.-Signal_LUS
- G Pressure_RxTx -
- Н Pressure_RxTx +
- J Pressure_Temp._LUS_V +
- Κ Cable shield




5.3.3 Electronic Box EBM

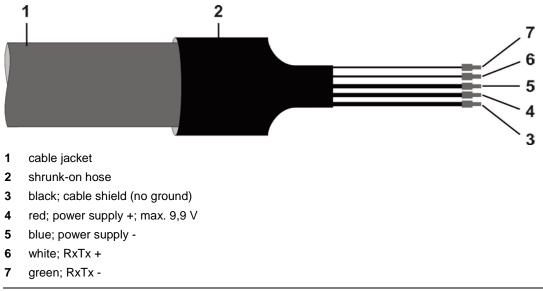






5.3.4 Sensors POA and CS2

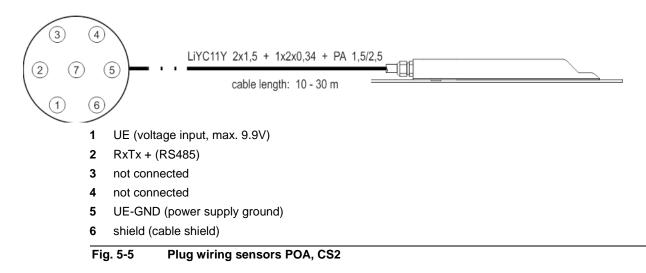



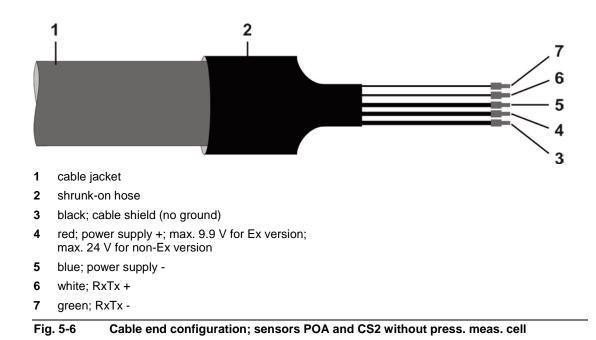

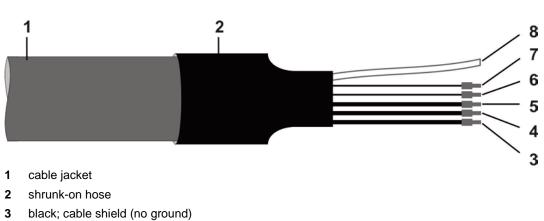



- 5 blue; power supply
- 6 white; RxTx +
- 7 green; RxTx -
- 8 air compensation hose



5.3.5 Sensor OCL

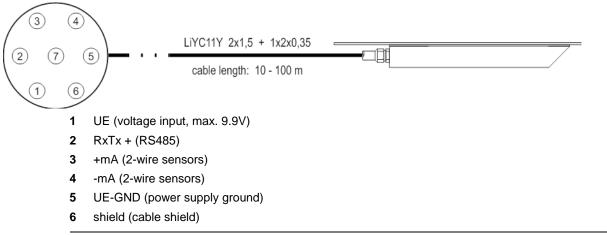


Fig. 5-8 Plug wiring sensor OCL

5.4 Cable extension

The cables of POA, CS2 and OCL sensors as well as the cable of the EBM Electronic Box EBM can be extended depending on the kind of sensor connection (for details see the table below).

DANGER



Observe the maximum possible cable lengths in Ex areas! (see EU Type Examination Certificate at the end of this instruction manual)



Important Note

Cable extension and sensor connection should be accomplished by authorised expert staff only. This is to avoid sensor damage.

!
•

Important Note

Inappropriate connections leading to increased contact resistance or the use of unsuitable cables may result in interferences or even measurement failures.

If the sensor cable needs to be extended by using a junction box use a junction box made of metal. Connect the shields of incoming as well as outgoing cables necessarily to the ground connection of the junction box.



NIVUS cable specifications for POA-V2, CS2, OCL-L1 active sensors and EBM:

- Cable capacity (blue/red): 100 pF/m
- Cable inductance (blue/red): 0.76 µH/m

These values are of significant importance to an Ex application as soon as operators need to create a certification of intrinsic safety for their facility which requires to consider the connectable external capacity Co or the inductance Lo.

Laying of cables in the ground:

The sensor cable fixed on the sensor is not designed to be laid in the ground permanently. If you wish to lay signal cables into the ground, concrete or similar please use additional protective pipes or hoses with sufficient inner diameters. Select inner diameter, bending radius and layout of protective pipes and hoses in a way which enables to remove old sensor cables and to draw in new ones without any problems.

Possible cable extensions:

Se	nsor connection	Sensor or EBM	Cable extension
К	Preconfigured for EBM and for sensors without pressure measurement cell, cable end preconfigured for connection to NF7, NFP, OCM Pro CF	EBM POA-V200 POA-V2H1 CS2-V200 CS2-V2H1 OCL	Extension with single-shielded signal cable.
L	For sensors with pressure measurement cell, cable end preconfigured for connection to NF7, NFP, OCM Pro CF	POA-V2D0 POA-V2U1 CS2-V2D0 CS2-V2U1	Extension possible only when the Type ZUB0 DAE pressure compen- sation element by NIVUS is used: connect he sensor cable ends to the terminal clamps of the junction box of the pressure compensation ele- ment and extend from there by using a single-shielded signal cable (see <i>Fig. 5-12</i>).
F	For sensors with pressure measurement cell, incl. plug and filter element	POA-V2D0 POA-V2U1 CS2-V2D0 CS2-V2U1 CSP-V2D0 CSP-V2U1	No extension possible.
S	For EBM and for sensors without pressure measure- ment cell, incl. plug	EBM POA-V200 POA-V2H1 CS2-V200 CS2-V2H1 CSP-V200 CSP-V2H1 OCL-L1	No extension possible.

NIVUS recommend cable type A2Y(L) 2Y 6x2x0.8 (or more wires) for extension purposes

Cable extension using Type A2Y(L) 2Y cable:

- Extend each of the twisted signal conductors (RxTx) for bus communication with one wire.
- Combine the same number of remaining wires in two strands for UE + and for GND and extend these strands depending on the distance between sensor and transmitter using one or more wire(s) connected in parallel per connecting cable.
 Solder or press parallel wires for UE + and GND per connecting cable

togehter.

The table below provies an overview on the **minimum number of wires per connection** for the extension cable Type A2Y(L) 2Y.

The minimum number of wires per connection is specified as follows: x (y)

- x = minimum total number of wires incl. data lines
- y = wires for power supply + and -

The specified cable lengths relate to non-Ex sensors.

Extension to	Minimum nu	mber of wires	per connection	on	
	Sensor ¹ - NF	7x	Sensor ² - N	FP 2 ³	
	10 m cable on sensor	30 m cable on sensor	10 m cable on sensor	30 m cable on sensor	Remarks
30 m	4 (2)	none	4 (2)	none	
50 m	4 (2)	4 (2)	4 (2)	4 (2)	
70 m	4 (2)	4 (2)	4 (2)	4 (2)	
100 m	4 (2)	4 (2)	4 (2)	4 (2)	
150 m	6 (4)	6 (4)	4 (2)	4 (2)	
200 m	6 (4)	6 (4)	4 (2)	4 (2)	
250 m	8 (6)	8 (6)	4 (2)	4 (2)	
300 m	8 (6)	8 (6)	4 (2)	4 (2)	Commissioning
400 m	10 (8)	10 (8)	4 (2)	4 (2)	through NIVUS
500 m	12 (10)	12 (10)	6 (4)	4 (2)	service requi-
700 m	14 (12)	16 (14)	6 (4)	6 (4)	red.
1000 m	20 (18)	20 (18)	8 (6)	8 (6)	

Cable extension using other cable types:

- For international use it is possible to use signal cables of other types with a minimum diameter of 0.8 mm² and a common cable shield. Bei Unsicherheiten zur Eignung des Signalkabels wenden Sie sich an NIVUS und fügen Sie ein aussagekräftiges Kabeltypdaten-blatt bei.
- Extension using equivalent cables using other cross-sections on request.

¹ POA-V2, CS2, OCL sensors and EBM Electronic Box

² POA-V2, CS2, OCL sensors and EBM Electronic Box

³ Not applicable for NFP



More than one sensor cable sharing one extension:

In applications featuring more than one flow velocity sensor it is possible to extend the sensor cables using one shared signal cable.

|--|

Important Note

It is not allowed to use common extensions in case of different applications or to use a common signal cable to extend separate level and flow velocity measurements.

5.5 Pressure compensation elements

5.5.1 General

Use NIVUS pressure compensation elements exclusively to operate sensors with integrated pressure cell.

The pressure compensation element is equipped with 2 drying capsules or dry granulate. These capsules / dry granulate prevent(s) moisture from leaking in and preserve electronic components.

- The drying capsules / dry granulate shall be checked and replaced if required regularly (depending on the ambient conditions).
- Replace the drying capsules / dry granulate if required.
- Please observe the maintenance hints in chapter 6.3.2 und 6.3.3.

CAUTION

Sensor damage through ingress of moisture




Moisture leaking into the cell will irreversibly damage the built-in electronic components of the sensor!

- Always operate sensors featuring a built-in pressure measurement cell with pressure compensation element. The drying capsules / dry granulate avoid(s) ingress of moisture!
- Never operate sensors with integrated pressure cell without or with used drying capsules / dry granulate.
- Please regularly check and replace the drying capsules/ dry granulate if required.
- ⇒ Pressure compensation elements, replacement filters, dry capsules and dry granulate see chapter 8.

5.5.2 Pressure compensation element for CSM and CSP Sensors

The pressure compensation element for CSM and CSP sensors is equipped with 2 drying capsules bzw

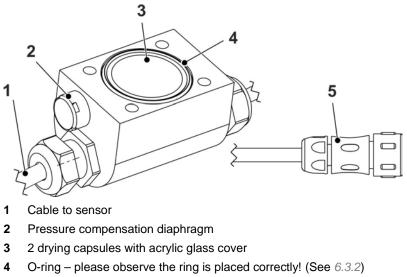

5 Plug for connection to Electronic Box / NFM 750




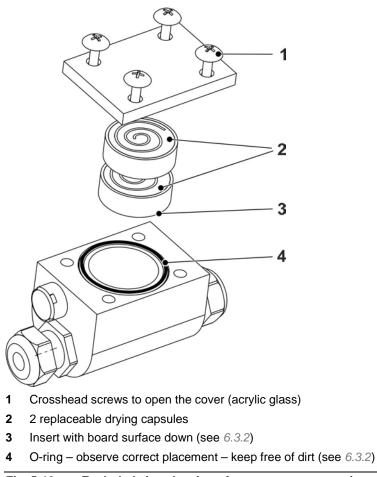


Fig. 5-10 Exploded view drawing of pressure compensation element



5.5.3 Pressure compensation element for POA- and CS2- sensors


Sensors with sensor connection types "F" or "S" have a configured plug, type "F" additionally have a preconfigured filter element, which works as a pressure compensation element (see figure below.)

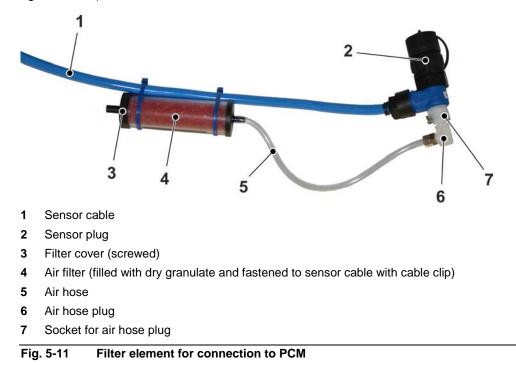

Cables on sensors with pressure measurement cell (Types V1D, V2D, V2U) must not be extended. The maximum uninterrupted cable length is 30 m. Longer cables require the installation of a junction box with pressure compensation (pressure compensation element) (see *Fig. 5-12*, Pos. 4 and 5).


This pressure compensation element has to be installed even if the cable of a sensor with integrated pressure measurement cell is connected directly an einen Messumformer der Typen NivuFlow 750, NivuFlow 7550 or to the OCM Pro transmitter.


It is available directly from NIVUS under order article no. >ZUB0 ZDAE<.

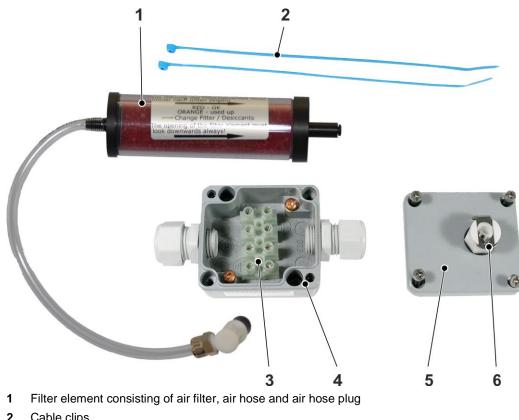

The pressure compensation element supplied by NIVUS for POA and CS2 sensorens consists of several components:

- 2 Cable clips
- 3 Terminal clamps
- Connection box 4
- 5 Box cover
- Self-locking socket for air hose plug 6





- Shield 1
- 2 Air hose
- 3 Transmitter side
- Terminal clamps 4
- 5 Flow velocity sensor side

Fig. 5-13 Open connection box



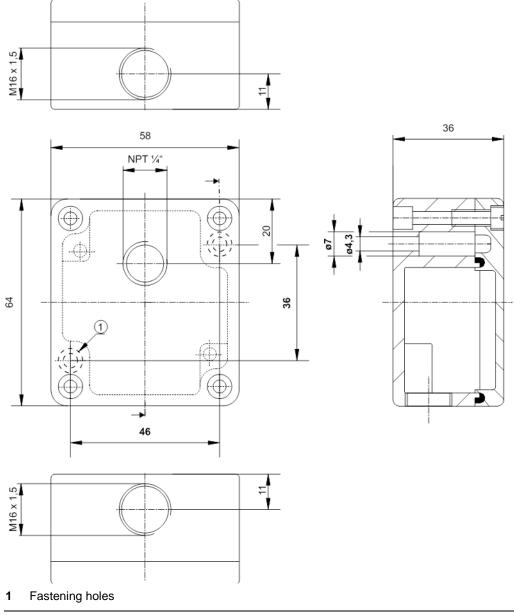


Fig. 5-14 Connection box dimensions

Connect pressure compensation element and air filter



Important Note

The connection box with air compensation has to be installed in an area without corrosive gases and which is durably protected from being flooded.

Please necessarily connect the shields of feed and return cable to the shield connections of the metal connection box. Otherwise faulty results or even measurement failures may occur.

To protect from water drops the cover of the air filter must always face downwards.

Between junction box and transmitter use a signal cable Type A2Y or a similar appropriate signal cable with integrated common shield.

Procedure:

- Connect the 5-wire cable from the sensor to the terminal clamp rail inside the junction box. Make sure to connect only the power supply (red + blue) and the signal bus lines (white + green, *Fig. 5-13*).
- 2. Connect the cable shield (black) to one of both shield clamps within the junction box (*Fig. 5-13*, Pos. 1).
- 3. Use both accompanying cable clips to fasten the air filter to the cable so that the filter cover is facing downwards (*Fig. 5-15*).
- 4. Snap the air hose plug into the socket in the cover (*Fig. 5-12*, Pos. 6).
- 5. Put on the junction box cover and tighten the screws.



Fig. 5-15 Assembled pressure compensation element





Important Note

Never operate the measurement incl. pressure compensation element with unplugged air hose plug automatic self-locking mechanism of the integrated socket (\rightarrow will shift the zero point of the level measurement).

5.6 Table of Resistiveness

CAUTION Damage due to aggressive media



As a basic principle, damage might occur in case of using chloride media (pitting corrosion in stainless steel ground plate or sensor jacket), hydrogen sulphide (H2S – risk of diffusion through cable sheath or sensor body resulting in destruction of copper wires and conductor paths) as well as various organic solvents (may dissolve cable sheath or sensor body)!

Sensors and cables shall be installed exclusively in media according to the table of resistiveness below.

Sensor installation and cable layout shall be executed exclusively in media according to the table of resistiveness below! Otherwise the measurement system may be damaged irreversibly.

The medium contacting parts of the sensors consist of:

- V4A (ground plate or pipe sensor jacket)
- PPO GF30 (sensor body)
- PEEK (sensor crystal cover)
- Polyurethane (cable sheath and glands)
- PTFE (gasket of sensor screw joint)
- PVDF (sensor body CSM-V100K)

The following materials are used additionally for sensors with pressure measurement cell:


- Hastelloy® C-276
- Viton® (PA/PR)

The sensor technology is resistant to normal domestic sewages, dirt and rain water as well as mixed water from municipalities and communities. Also in many industrial plants (e.g. Huels, BASF etc.) the resistance does not present any problems. The sensor technology nevertheless is not resistant to all substances and substance mixtures.

Please observe that substance mixtures (several substances being present simultaneously) under certain circumstances may cause catalytic effects which might not occur if the individual substances are in use. Due to infinitely possible combinations these catalytic effects cannot be verified entirely.

If in doubt please contact your NIVUS representative and request a free material sample for long time testing purposes.

For use in special applications with high aggressive or solvent-containing media there are sensors made of full PEEK available with ground plates made of Hastelloy or Titanium as well as pipe sensors made of high resistant special steel. Sensor cables which have to be immersed into the medium are available with a special FEP coating (resistant to organic solvents or hydrogen sulphide).



\mathbf{O}	®
ntvi	5

MEDIUM	FORMULA	CONCEN- TRATION	HDPE	PPO GF30	PUR	PEEK	FEP	V4A	Hastelloy C 276	Viton (PA/PR)	PA	PVDF
Acetaldehyde	C ₂ H ₄ O	40%	3/3	4	4	1	(1)	(1)	0	4/4	2/4	4/4
Acetic acid	$C_2H_4O_2$	10%	1/1	2	3	1	1/1	1/1	1	(3)	4/4	1/1
Acetone	C ₃ H ₆ O	40%	1/1	4	4	1	(1)	1/1	1	4/4	1/0	3/4
Allyl alcohol	0 0	96%	1/3	2	0	1	1/1	1/1	0	4/4	3/0	(2)
Aluminium chloride	AICI ₃ (NH ₄)CI	10%	1/1 1/1	2	0	1	1/1 1/1	3/4 1/2L	1	1/0 1/1	1/0 3/4	1/1 1/1
Ammonium chionde Ammonium hydroxide		watery 5%	1/1	2	0	1	1/1	1/2L 1/1	1	(2)	(2)	(2)
Aniline	C_6H_7N	5% 100%	1/1	2	4	1	1/1	1/0	1	(Z) 2/4	(2) 3/4	(<u>2</u>) 1/4
Benzene		100%	3/4	3/4	2	1	1/1	1/0	1	3/3	2/0	1/4
Benzyl alcohol	C ₇ H ₈ O	100%	3/4	3	2	1	1/1	1/1	1	1/0	4/4	1/1
Boric acid	H ₃ BO ₃	100%	1/1	1	1	1	1/1	1/1	1	1/1	1/0	1/1
Bromic acid	HBrO ₃	cocentr.	0/0	0	3	1	0/0	(4)	0	(2)	(4)	(1)
Butanol	C ₄ H ₁₀ O	techn.pure	1/1	2	3	1	1/1	(1)	1	3/4	1/0	(2)
Calcium chloride		spirituous	1/0	1	1	1	1/1	1/2L	1	1/1	4/4	1/1
Carbon disulphide	-	100%	4/4	2	0	1	1/1	1/1	1	1/0	3/0	1/0
Carbon tetrachloride		100%	4/4	3	4	1	1/1	1/1L	1	1/1	4/4	1/1
Caustic soda	NaHO	50%	1/1	1	3	1	1/1	1/3	1	3/3	1/0	1/1
Chlorine	Cl ₂	0070	4/4	3	3	1	1/1	1/0	0	1/1	4/4	1/0
Chlorine water	Cl ₂ x H ₂ O		3/0	2	0	1	(1)	2/0L	1	1/0	4/4	1/1
Chlorobenzene		100%	3/4	3	4	1	1/1	1/1	1	3/4	4/4	1/1
Chloroform	CHCl ₃	100%	3/4	4	4	1	1/1	1/1	1	4/4	3/4	1/1
Chloromethane	CH ₃ Cl	techn.pure	3/0	4	4	1	1/0	1/1L	0	4/4	(3)	1/0
Chromic acid	-	10%	1/1	1	0	1	1/1	1/2	1	1/1	4/4	1/1
Citric acid	C ₆ H ₈ O ₇	10%	1/1	1	1	1	1/1	1/1	1	1/1	1/1	1/1
Diesel	_	100%	1/3	2	0	1	(1)	(1)	0	1/1	1/1	1/1
Ethanedioic acid	C ₂ H ₂ O ₄ x	watery	1/1	2	0	1	1/1	1/3	2	1/1	4/4	1/1
Ethanol		96%	1/0	1	1	1	1/1	1/1	1	3/0	1/0	1/1
Ethyl acetate	C ₄ H ₈ O ₂	100%	1/3	3	3	1	1/1	(1)	0	4/4	1/0	1/1
Ethyl alcohol	C ₂ H ₆ O	100%	1/0	1	1	1	1/1	1/1	0	3/0	1/0	1/1
Ethylen chloride	$C_2H_4Cl_2$		3/3	4	3	1	1/1	1/1L	1	3/0	3/0	1/1
Ferric chloride	FeCl ₃	saturated	1/1	2	3	2	1/1	4/4	0	1/1	3/0	1/1
Formaldehyd dilution	CH ₂ O	10%	1/1	1	2	1	1/1	1/1	1	3/0	3/3	1/1
Glycerin	000	90%	1/1	1	2	1	1/1	1/1	1	1/1	1/0	1/1
Heptane	1 10	90%	2/3	1	1	1	1/1	1/1	1	1/1	1/0	1/1
Hexane	C ₆ H ₁₄	100%	2/3	1	2	1	1/1	1/1	1	1/1	4/4	1/1
Hydrochloric acid		1-5%	1/1	1	3	1	1/1	4/4	1	1/1	4/4	1/1
Hydrofluoric acid		50%	1/1	2	3	1	1/1	4/4	2	1/3	4/4	1/1
Hydroxypropionic	C ₃ H ₆ O ₃	3%	1/1	1	0	1	1/1	1/1	1	1/1	(3)	1/1
Isopropanol	C ₃ H ₈ O	techn.pure	1/1	1	2	1	1/1	(1)	1	1/1	1/0	1/1
Magnesium chloride	MgCl ₂	watery	1/1	1	2	1	1/1	1/0L		1/1	1/0	1/1
Mercuric chloride	HgCl ₂	watery	1/1	1	0	1	1/1	(4)	1	1/1	4/4	1/1
Methanol	CH₄O		1/1	1	2	1	1/1	1/1	1	3/4	2/0	1/1
Methyl acetate	$C_3H_6O_2$	techn.pure	1/0	3	0	1	1/0	1/1	1	4/4	1/0	1/1
Nitric acid	HNO ₃	1-10%	1/1	1	3	1	1/1	1/1	1	1/1	4/4	1/1
Nitrobenzene	C ₆ H ₅ NO ₂		3/4	3	4	1	1/1	1/1	0	4/4	4/4	1/1
Oleic acid	C ₁₈ H ₃₄ O ₂	techn.pure	1/3	1	1	1	(1)	1/1	0	2/2	1/0	1/1
Ozone	O ₃		3/4	2	2	1	1/1	0/0	0	1/0	4/4	(1)
Petrol, unleaded	$C_5H_{12} - C_{12}H_{26}$		2/3	3	2	1	1/1	1/1	1	(1-	1/0	1/1
Petroleum	—		1/1	1	1	1	1/1	1/1	1	1/1	(1)	1/1
Petroleum	—	techn.pure	1/3	3	1	1	(1)	1/1	0	1/0	1/0	0/0
Phenol	C ₆ H ₆ O	100%	2/3	3	2	1	1/1	1/1	1	2/3	4/4	1/1
Phenylmethane Dheanharia agid		100%	3/4	3	3	1	1/1	1/1	0	3/3	1/0	1/0
Phosphoric acid	0	85%	1/1	1	0	1	1/1	1/3	1	1/1	4/4	1/1
Potassium hydroxide	KHO	10%	1/1	1	3	1	1/1	1/1	1	4/4	1/0	1/1
Potassium nitrate		watery	1/1	1	0	1	1/1	1/1	1	1/1	1/0	1/1
Sodium bisulphite	NaHSO ₃	watery	1/1	1	0	1	(1)	1/1	1	1/0	1/0	1/1
Sodium carbonate		watery	1/1 1/1	1	3 2	1	1/1 1/1	1/1 1/2	1	1/1 1/1	1/0 1/1	1/1 1/1
Sodium chloride		watery		1		1			1			
Sodium sulphate Sulphuric acid	Na ₂ SO ₄ H ₂ SO ₄	watery 40%	1/1 1/1	1	0 3	1	1/1 1/1	1/1 2/3	1	1/1 1/1	1/0 4/4	1/1 1/1
				4							3/0	
Trichloroethylene Vegetable oils		100%	3/4 0/0	4	4	1 1	1/1	1/1L 1/1	1 0	1/3 1/0	3/0 0/0	1/0 1/1
vegetable Ulls		I	0/0	1	1	1	(1)	1/1	U	1/0	0/0	1/1

5.6.1 Resistiveness Legend

Resistiveness

There are two values per medium: left number = value at +20 °C / right number = value at +50 °C.

- 0 no specifications available
- 1 very good resistance/suitable
- 2 good resistance/suitable
- 3 limited resistance
- 4 not resistant
- K no general specifications possible
- L risk of pitting corrosion or stress corrosion cracking
- () estimated value

Material Names

HDPE	Polyethylene, high density
FEP	Tetrafluorethylene-Perfluorpropylene
V4A	Stainless steel 1.4401 (AISI 316)
PPO GF30	Polyphenyloxylene with 30% glass fibres
PU	Polyurethane
PEEK	Polyetheretherketone
PA	Polyamide
PVDF	Polyvinylidenfluoride



6 Cleaning and Maintenance

6.1 Basics of Cleaning

WARNING Germ contamination



Due to using the sensors mostly in the waste water field which may be contaminated with hazardous germs.

In case of contact with sensors and cables:

- Observe the regulations on safety at work Arbeitsschutzbestimmungen
- Always wear protective clothing.

In heavily polluted media tending to sedimentation it may be necessary to clean the flow velocity sensor regularly. To do this use a brush with plastic bristles, a broom or similar.

Clean and dry dirty plug contacts (sensor connection F or S) before you reconnect the sensors. Remove dried dirt carefully by using compressed air or a brush with platic bristles (no metal). If required use contact spray to maintain contacts.



Damage through hard objects

- Never use hard objects such as wire brushes, rods, scrapers or similar to clean the sensor.
- Cleaning by using a water jet is allowed up to a max. pressure of 4 bar (see 4.5 Specification) (e.g. by using a water hose).
- Never clean flow velocity sensors with pressure measurement cell (types V1D, V2D and V2U) by **using a water jet!**
- Do not clean sensor with a high pressure cleaner. The use of such equipment may damage the sensor resulting in measurement failure.

6.2 Cleaning wedge sensors

CAUTION

Material damage and measurement errors due to loose parts



Removing or loosening of ground plate or cable gland result in leakage and therefore will cause measurement and sensor failure.

• Do not remove parts.



Important Note

If sedimentation which cannot be removed prevents correct measurement the sensor must be maintained by NIVUS. For this purpose return the sensor padded and packed as good as possible to NIVUS.

CAUTION



Damage of pressure measurement cell during cleaning

Never clean the pressure cell using a water jet. Just dip the sensor into a bucket filled with water and clean by slightly moving it.

The cover of the pressure measurement cell is sealed with a label on the ground plate. This warning label shall never be damaged or removed. Do not loosen the screws underneath the label.

Disregarding invalidates the manufacturer warranty. If in doubt please let NIVUS do the cleaning.

Flush the duct milled into the ground plate with water **immediately every time after dismantling** in order to avoid accumluation of deposits. For this purpose dip the sensor into water several times.

6.3 Maintenance wedge sensors

6.3.1 Wedge Sensors with Pressure Measurement Cell

Due to physical reasons, level measurements performed by sensors with pressure measurement cell are subject to long-term drift (see 5.5.3 Pressure compensation element for POAand CS2- sensors).

NIVUS therefore recommend calibration of sensors with integrated pressure measurement cell twice a year regarding the respective zero point. The best results are going to be achieved if the water level is as low as possible or if the sensor has been removed from the measurement medium.



The calibration procedure is described in according Instruction Manuals of OCM Pro, NivuFlow or PCM transmitters.

Wedge sensors with pressure measurement cell on the connection plug or the compensation element are additionally equipped with a filter element containing dry granulate or drying capsules. Dry granulate and drying capsules are subject to natural wear and tear which depends on:

- measurement duration
- measurement interval
- air pressure fluctuation
- environmental conditions

Check the air filter or the drying capsules periodically or prior to every use. Wear is indicated by a colour change of the dry granulate or the drying capsules (see label on the air filter or the pressure compansation element). Once the colour of the dry granulate begins to change either replace the granulate or replace the filter element by another one of the same specification. Replace the drying capsules as soon as the colour begins to change.

⇒ Spare filters, dry granulate and drying capsules see 8 Accessories and Spare Parts.



6.3.2 Pressure Compensation Element for CSM and CSP Sensors

When using CSM and CSP sensors with pressure measurement cell and pressure compensation element the built-in drying capsules (see *Fig. 5-10*) need to be regularly checked and replaced if required. Inspection intervals depend on the prevailing air humidity and may vary between 2 and 12 weeks depending on application.

As soon as the drying capsules are used up their colour will change from orange to white. The capsules then need to be replaced.

- ORANGE = new capsule / not yet used up
- WHITE = capsule used up please replace both capsules
- ⇒ Spare capsules are available from NIVUS (see 8 Accessories and Spare Parts).



Note

When replacing the drying capsules please observe the glued O-ring to remain in the groove. Necessarily keep the ring free of dirt since otherwise the pressure compensation element may leak.

Replace drying capsules:

- 1. Unscrew the four crosshead screws of the acrylic glass cover and remove the cover (see *Fig. 5-10*, Pos.1)
- 2. Remove used drying capsules (can be disposed with household waste)
- 3. Peel off the aluminium foil from the new drying capsules
- 4. Insert the new drying capsules with the cardboard side down
- 5. Check the position of the o-ring and put it into the groove again if necessary (see *Fig.* 5-9 / *Fig.* 5-10, Pos. 4)
- Put on the cover and fasten using the 4 crosshead screws. Make sure to avoid dirt, sand or similar between pressure compensation element and cover.


6.3.3 Pressure Compensation Element for POA and CS2 Sensor

Inspect the filter element regularly when mounting POA or CS2 sensors with pressure measurement cell and pressure compensation element (see *Fig. 5-11*).

Inspection intervals depend on the prevailing air humidity and may vary between 2 and 12 weeks depending on application.

Wear of the air filter is indicated by a colour change of the dry granulate (see label on the air filter). If the colour of the dry granulate should change by more than 50% replace dry granulate or filter element.

 ⇒ Spare filter elements and dry granulate can be purchased from NIVUS (see 8 Accesso-ries and Spare Parts).

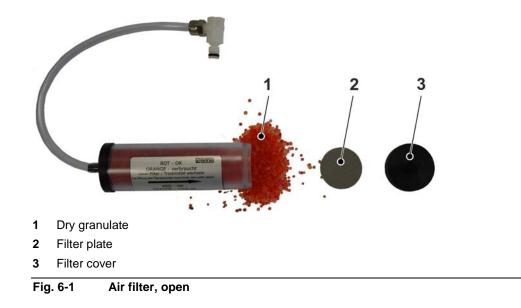

Replace dry granulate:

- 1. Cut the cable clips fastening the filter on the cable
- 2. Press the release key on the socket of the sensor cable



- \rightarrow The air hose plug is released from the socket
- 3. Unscrew filter cover (Fig. 6-1, Pos.3)
- 4. Remove filter plate (*Fig. 6-1*, Pos. 2)
- 5. Dispose use dry granulate (can be disposed with household waste)
- 6. Refill air filter with new dry granulate
- 7. Use the filter plate with the fine side facing the thread to cover the dry granulate
- 8. Put on the filter cover again and tighten
- 9. Replug the air hose plug into the socket of the sensor cable
 → The air hose plug snaps into place.
- 10. Fasten the air filter on the sensor cable using new cable clips



6.4 Cleaning and maintenance sensors OCL and DSM

These sensors are normally non-contacting. Hence, it is necessary to check if the transmitting pad is not covered and the sound beam is free to reach the wa-ter surface after immersion (flooding) into the measurement medium only.

In case of pollution clean the sensor with water and a cloth or a soft brush.




Material damage and measurement errors through loose or dismantled parts



Removing or loosening mounting plate or cable gland results in leakage and therefore will cause measurement and sensor failure.

I principle do not remove sensor parts (exceptions see Fig. 6-2 and Fig. 6-3).

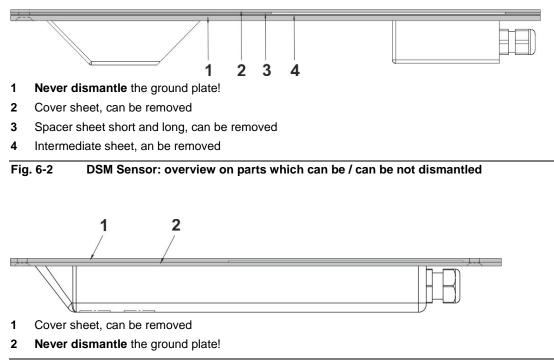



6.5 Cleaning and maintenance pipe sensors POA and CS2

The pipe sensor can be removed from the pipeline for maintenance or control purposes without any problems. The sensor position is fixed due to the retaining element.



Description of retaining element and sensor screw connection see Installation Instruction Correlation and Doppler Sensors.

Dismantle pipe sensor POA or CS2:

1. Unscrew the union nut of the sensor screw connection.



- 2. Loosen both hexagon socket screws on the top clamp element on the reverse side of the retaining element.
- 3. Remove pipe sensor.

Both screwed clamp elements on the reverse side remain to be unchanged on the pipe sensor body. During reinstallation both elements serve as stop and positioning aid.



Clean pipe sensor:

⇒ See chapter 6.1



Reinstall pipe sensor POA or CS2:

- 1. Replace o-ring (Art.-No. ZUB0 SCHNEID 15PT) and white sealing ring (PDFE; Art.-No. E-PMA-ORING 35) in the sensor screw connection and slightly grease.
- 2. Insert sensor into sensor screw connection. The clamp elements must be connected again.
- 3. Tighten union nut on the sensor.
- 4. Screw the retaining element together again using both M5 hexagon socket screws.

6.6 Cleaning and maintenance pipe senor CSM


The pipe sensor can be removed from the pipeline for maintenance or control purposes.




Desciption of pipe sensor CSM see Installation Instruction Correlation and Doppler Sensors

Dismantle pipe sensor CSM:


1. Read and note insertion depth at pipe sensor scale

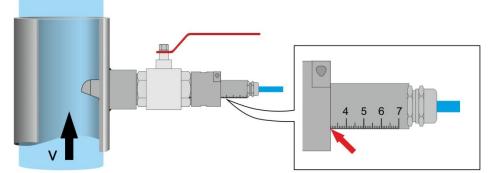


2. Mark the sensor position (scale on pipe sensor) on sensor clamping. The marking helps adjusting the sensor while reinstalling.




3. Release the two cylinder bolts M5 on the sensor clamping with a 4 mm hex key




4. Withdraw the pipe sensor up to the stop collar



5. Close stop ball valve immediately.




- \rightarrow No liquid can pour out from the pipe
- 6. Use 2 spanners (size 36 and 39) to unscrew sensor clamping from stop ball valve, make sure to turn the cable too.



 \rightarrow The pipe sensor is connected with the clamping only.



7. Remove pipe sensor, the sensor clamping remains loosely connected with the pipe sensor. Take care not to loose the flat gasket.

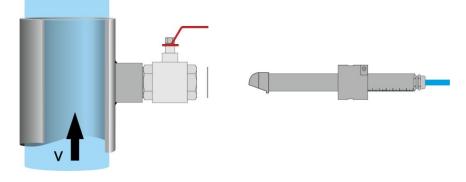

Clean pipe sensor:

⇒ See chapter 6.1

Reinstall pipe sensor in reversed order:

- 1. Insert pipe sensor into stop ball valve.
- 2. Fasten sensor clamping:
 - a) Insert flat gasket between stopball valve and sensor clamping correctly.
 - b) Use 2 spanners (size 36 and 39) to tighten the sensor clamping on the stop ball valve by a minimum of 10 Nm, make sure to turn the cable too.
- 3. Open stop ball valve and insert pipe sensor into pipe, Insertion depth as noted while disassembling.
- 4. Adjust pipe sensor according the marking from the disassembling.
- 5. Align centre line to look upstream.
- Use a 4 mm Allen® key to tighten both screws on the sensor clamping by approx.
 3.4 Nm.
- \rightarrow The pipe sensor is installed firmly.

6.7 Installation of Spare Parts and Parts subject to wear and tear

We herewith particularly emphasise that replacement parts or accessories not supplied by NIVUS moreover are not certified and approved by NIVUS too.

Installation and/or the use of such products hence may negatively influence predetermined constructional characteristics of the measurement system or even lead to instrument failures. NIVUS cannot be held responsible for any damage resulting due to the use of non-original parts and non-original accessories.

→ You can find original manufacturer spare parts or accessories in chapter 8 Accessories and Spare Parts and/or in the valid price list.

6.8 Customer Service Information

For the recommended annual inspection of the entire measurement system and/or the extensive inspection after latest ten years contact our customer service:

NIVUS GmbH - Customer Service Phone +49 (0) 7262 9191 - 922

customercenter@nivus.com



7 Dismantling/Disposal

Improper disposal may be harmful to the environment.

Always dispose the sensors and packaging materials according to applicable local regulations on environmental standards for electronic products

- Disconnect the measurement system from mains power.
- Remove the cables from the transmitter using appropriate tools.
- Remove the sensors from the channel bottom.



EC WEEE-Directive logo

This symbol indicates that the Directive 2012/19EG on waste electrical and electronic equipment requirements shall be observed on the disposal of the equipment.

8 Accessories and Spare Parts

Pressure compensation element ZUB0 DAE	For connection of sensors with integrated pressure measurement cell and open cable end (cable tail); Material: aluminium, plastics; Protection rating: IP54 (except filter element)
Replacement filter ZUB0 FILTER	With plug and connection hose for connecting sensors with integrated pressure measurement cell to PCM series transmitters and to the pressure compensation element ZUB0 DAE.
Dry granulate	Dry gel for filling of used air filters, type ZUBO FILTER.
ZUB0 FILTER MAT	1 kg (sufficient for approx. 25 refills)
ZUB0 FILTER MAT5	200 g (sufficient for approx. 5 refills)
Spare capsules ZUB0 TROCKENK	20 Spare capsules, individually packed, for pressure compensation ele- ment of the CSM or CSP sensor

Pipe mounting system	
ZUB0 RMS2	For temporary, non-permanent clamping installation of wedge sensors
ZUB0 RMS3	POA-, CSM-, and DSM- in pipes DN 200 up to maximum DN 2000,
ZUB0 RMS4	Material: 1.4571
ZUBO RMS5	
Sensor Adapters	
ZUB0 KLEMM	Metal connection box incl. clamps for adaptation of PCM Sensors (incl. plug) to NF7 or OCM Pro transmitters (in Ex and non-Ex areas) or
	for connection sensor cables mit cable tail to a PCM Pro (in Ex and non-Ex areas)
Manual extraction tool	
ZUB0 AA	For manual removal of 1 $\frac{1}{2}$ " pipe sensors under process conditions, pressure-tight up to 4 bar (not suitable for installation or fastening).
Stop ball valve	
ZUB0 HAHN R15	For removal of pipe sensors from pipes without pressure
Tapping saddle	
ZUB0 ABS01	For installation of 1.5" pipe sensors in pipelines
ZUB0 ABS02	
ZUB0 ABS03	
Mounting plates	
ZUB0 ABP15	For installation of pipe sensors 1.5" in pipes made of GRP and concrete
Welding nozzles	
ZUB0 STU15	For installation of pipe sensors 1.5" in steel or stainless steel conducts



You can find more accessories for sensor installation in our current price *list.*



Index

Accessoires	87
Article number	42

С

Α

Cable end configuration	
CS2 with press. meas. cell	62
CS2 without press. meas. cell	62
Electronic box EBM	61
POA with press.meas. cell	62
POA without press. meas. cell	62
Cable extension	63
Certificates and approvals	90
Cleaning	76
DSM	
OCL	80
Pipe sensor CSM	82
Pipe sensors POA, CS2	81
Wedge sensors	76
Copyright	3
Copyrights and property rights	3
Customer service	85

D

Delivery	16
Device identification	37
Disclaimer	15
Dismantling	86
Disposal	

Ε

Electronic box EBM	
Specification	51
Electronic Box EBM	
Construction	23
Type key	43
Electrostatic discharge	57
Ex-Approval	12

L

Installation	57
Intended use	13

Μ

Maintenance7	'6
DSM 8	30
OCL 8	30
Pipe sensor CSM 8	32
Pipe sensors POA, CS2 8	31
Pressure compensation element	
CSP	78
Pressure compensation element CS27	78
Pressure compensation element CSM 7	78
Pressure compensation element POA 7	78

Wedge sensors with press. meas. cell 77

Nameplates	37
Names	3

Ρ

Ν

Personnel requirements	12
Plug wiring	
CS2	61
CSM	60
CSP	60
DSM	60
OCL	63
POA	61
Pressure compensation element	66
Connect to CS2	70
Connect to POA	70
CS2	68
CSM	67
CSP	67
General	66
POA	68
Protection hose	59
Protective clothing recommended.	11

R

Reciept	16
Return	16

S

Safety at work11
Safety devices11
Safety Instructions
-
Sensor construction
CS2 pipe sensor 34
CS2 wedge sensor 32
CSM-V100K 19
CSM-V100R21
CSM-V1D0K
CSP
DSM
OCL
POA pipe sensor28
POA wedge sensor 26
Sensor installation58
Sensors
Overview
Versions42
Spare parts87
Installation
Specification
•
CS2
CSM-V100K 48
CSM-V100R 50

Correlations Sensors - Rev. 09 / 01.10.2019

CSM-V1D0K	49
CSP	55
DSM	51
Electronic box EBM	51
OCL	53
POA	52
Storing	16
-	

Т

Table of Resistiveness	73
Translation	3
Transport	16

U

Type key

Users's	responsibilities	.14	4
000100			1

 CS2
 46

 CSM
 42

 CSP
 47

 DSM
 43

 Electronic box EBM
 43

 (1)



Translation

EC-TYPE EXAMINATION CERTIFICATE

- (2) Equipment and protective systems intended for use in potentially explosive atmospheres Directive 94/9/EC
- (3) EC-Type Examination Certificate Number

TÜV 03 ATEX 2262

- (4) Equipment: Sensor type POA/... resp. OCL/...
- (5) Manufacturer: Nivus GmbH
- (6) Address: D-75031 Eppingen, Im Täle 2
- (7) This equipment or protective system and any acceptable variation thereto are specified in the schedule to this certificate and the documents therein referred to.
- (8) The TÜV NORD CERT GmbH & Co. KG, TÜV CERT-Certification Body, notified body number N° 0032 in accordance with Article 9 of the Council Directive of the EC of March 23, 1994 (94/9/EC), certifies that this equipment or protective system has been found to comply with the Essential Health and Safety Requirements relating to the design and construction of equipment and protective systems intended for use in potentially explosive atmospheres given in Annex II to the Directive.

The examination and test results are recorded in the confidential report N° 03 YEX 550797.

(9) Compliance with the Essential Health and Safety Requirements has been assured by compliance with:

EN 50 014: 1997

EN 50 020: 2002

- (10) If the sign "X" is placed after the certificate number, it indicates that the equipment or protective system is subject to special conditions for safe use specified in the schedule to this certificate.
- (11) This EC-type examination certificate relates only to the design, examination and tests of the specified equipment in accordance to the Directive 94/9/EC. Further requirements of the Directive apply to the manufacturing process and supply of this equipment. These are not covered by this certificate.
- (12) The marking of the equipment or protective system must include the following:

TÜV NORD CERT GmbH & Co. KG TÜV CERT-Certification Body Am TÜV 1 D-30519 Hannover Tel.: 0511 986-1470 Fax: 0511 986-2555

Thouse Head of the

Head of the Certification Body

TÜV CERT A4 04.02 10.000 Lö

⟨€x⟩ II 2 G EEx ib IIB T4

Hanover, 2003-09-18

This certificate may only be reproduced without any change, schedule included. Excerpts or changes shall be allowed by the TÜV NORD CERT GmbH & Co. KG

TÜV NORD CERT

page 1/2

SCHEDULE

(14) EC-TYPE EXAMINATION CERTIFICATE N° TÜV 03 ATEX 2262

(15) Description of equipment

(13)

The sensor type POA/... resp. OCL/... is intended together with the associated measuring transformers for the measurement of the flow speed and the flow level in partly or fully filled pipes and channels via supersonic technology.

Electrical data

Signal and supply circuit (plug/prefabricated cable)	in type of protection Intrinsic Safety EEx ib IIB only for the connection to associated measuring transducer type OCP/ according to TÜV 00 ATEX 1572	
	Maximum values: $U_i = 10.5 V$ $I_i = 500 mA$	
or	type PCP/ according to TÜV 03 ATEX 2268 Maximum values: U _i = 9.9 V I _i = 640 mA	

The effective internal inductance and capacitance are negligibly small.

- (16) Test documents are listed in the test report No.: 03 YEX 550797.
- (17) Special conditions for safe use

none

(18) Essential Health and Safety Requirements

no additional ones

page 2/2



Translation

1. SUPPLEMENT to

EC TYPE-EXAMINATION CERTIFICATE No. TÜV 03 ATEX 2262

of the company: NIVUS GmbH Im Täle 2 D-75031 Eppingen

In the future, the sensors type POA/... resp. OCL/... may also be manufactured and operated according to the test documents listed in the test report.

The amendments concern the electrical data.

Electrical data

Signal- and supply circuit (plug/prefabricated cable)	in type of protection Intrinsic Safety EEx ib IIB only for the connection to associated measuring transducer type OCP/ according to TÜV 00 ATEX 1572 Maximum values: $U_i = 10,5 V$ $I_i = 640 \text{ mA}$
or	type PCP/ according to TÜV 03 ATEX 2268 Maximum values: $U_i = 9,9 V$ $I_i = 629 mA$ The effective internal inductance and capacitance are negligibly small.

All other data apply unchanged for this amendment.

Test documents are listed in the test report N° 04 YEX 551201.

TÜV NORD CERT GmbH & Co. KG TÜV CERT-Certification Body Am TÜV 1 D-30519 Hannover Tel.: 0511 986-1470 Fax: 0511 986-2555

Head of the Certification Body Hannover, 2004-01-30

page 1/1



Translation 2. S U P P L E M E N T

to Certificate No. Equipment:

Manufacturer: Address:

Order number: Date of issue: TÜV 03 ATEX 2262 Sensors types POA-x2xx xx E xx x x, OCL-L1 x x xx E xx K and CS2-xxxx xx E xx x x NIVUS GmbH Im Täle 2 75031 Eppingen, Germany 8000555804 2010-06-21

In the future, the sensors type POA/... resp. OCL/... may be produced and operated according to the documents listed in the test report.

- The changes refer to
- the execution of the sensor electronics for the new sensor types
- a new dual sensor with type designation CS2-xxxx xx E xx x in an new sensor housing with 4 ultrasonic transducers
- the changes of the origin type designations: POA-x2xx xx E xx x and OCL-L1 x x xx E xx K
- a new RS485 interface with data for the protection level ib
- the marking.

The new marking reads: II 2 G Ex ib IIB T4

The permissible ambient temperature range of the sensors is -20 °C ... 40 °C.

Electrical data

	in type of protection Intrinsic Safety Ex ib IIB
(Plug in connector/cable tail	only for connection to
connection wires:	a certified intrinsically safe circuit
red: +	maximum values:
blue: GND)	$U_i = 10.5 V$
	$I_i = 640 \text{ mA}$
	The connection to the following measuring transducers is permissible:
	type OCP/ according to TÜV 00 ATEX 1572 or
	type PCP/ according to TÜV 03 ATEX 2268
	The effective internal capacitance and inductance of the
	electronics are negligibly small.
RS485 interface	in type of protection Intrinsic Safety Ex ib IIB
(Plug in connector/cable tail	maximum values:
connection wires:	$U_o = 6 V$
white: RxTx+	$I_{o} = 154 \text{ mA}$
green: RxTx-	$P_o = 230 \text{ mW}$
blue: GND)	characteristic line: linear
	The effective internal capacitance and inductance of the electronics are negligibly small.
	· · · · · · · · · · · · · · · · · · ·

P17-F-016 06-06

page 1/2



2. Supplement to Certificate No. TÜV 03 ATEX 2262

Ex ib	IIB	
max. permissible external inductance	9.5 mH	1 mH
max. permissible external capacitance	5.1 µF	13 µF

At connection of the RS485 interface to belonging measuring transducers with active intrinsically safe circuits, the rules for the interconnection of intrinsically safe circuits have to be observed.

.

The equipment according to this supplement meets the requirements of these standards:

EN 60079-0:2006 EN 60079-11:2007

(16) The test documents are listed in the test report No. 10 203 555804.

(17) Special conditions for safe use

none

(18) Essential Health and Safety Requirements

no additional ones

TÜV NORD CERT GmbH, Langemarckstraße 20, 45141 Essen, accredited by the central office of the countries for safety engineering (ZLS), Ident. Nr. 0044, Iegal successor of the TÜV NORD CERT GmbH & Co. KG Ident. Nr. 0032

The head of the certification body

Schwedt

Hanover office, Am TÜV 1, 30519 Hanover, Tel.: +49 (0) 511 986-1455, Fax: +49 (0) 511 986-1590

page 2/2



Translation 3. S U P P L E M E N T

to Certificate No. Equipment:

Manufacturer: Address:

Order number: Date of issue: TÜV 03 ATEX 2262 Sensors types POA-xxxx xx E xx x x, OCL-L1 x x xx E xx K and Vector Profiler CS2-xxxx xx E xx x x NIVUS GmbH Im Täle 2 75031 Eppingen, Germany 8000398817 2012-03-27

In the future, the sensors type POA-... bzw. OCL-... bzw. CS2-... may be produced and operated according to the documents listed in the test report. The changes refer to

- the execution of the sensor electronics,
- a new sensor of the generation "Vector Profiler" type CS2-xxxx Rx E xx x x,
- a new sensor type POA-xxxx Rx E xx x x
- new key sensor bodies for the sensors POA-... and
- the marking.

The new marking reads: II 2 G Ex ib IIB T4 Gb

The electrical data as well as all other details remain unchanged.

The equipment according to this supplement meets the requirements of these standards:

EN 60079-11:2007

EN 60079-0:2009

(16) The test documents are listed in the test report no. 12 203 087811.

(17) Special conditions for safe use

none

(18) Essential Health and Safety Requirements

no additional ones

TÜV NORD CERT GmbH, Langemarckstraße 20, 45141 Essen, notified by the central office of the countries for safety engineering (ZLS), Ident. Nr. 0044, legal successor of the TÜV NORD CERT GmbH & Co. KG Ident. Nr. 0032

The head of the notified body

Schwedt

Hanover office, Am TÜV 1, 30519 Hanover, Tel.: +49 (0) 511 986-1455, Fax: +49 (0) 511 986-1590

P17-F-016 06-11

page 1/1



Translation 4. SUPPLEMENT

to Certificate No. Equipment:

Manufacturer: Address:

Order number: Date of issue: **TÜV 03 ATEX 2262** Sensors types POA-x2xx xx E xx x x, OCL-L1 x x xx E xx K and CS2-xxxx xx E xx x x NIVUS GmbH Im Täle 2 75031 Eppingen 8000442088 2015-06-11

In the future, the sensors types

POA-x2xx xx E xx x x OCL-L1 x x xx E xx K and CS2-xxxx xx E xx x x

may also be manufactured and operated according to the documents listed in the test report. The changes refer to

- changes in the layout and regarding components,
- constructional changes at the housings and
- the electrical data.

A standard update was performed.

Electrical data

Signal and supply circuit (Cable tail; connection wires: red [+], blue [GND]	in type of protection Intrinsic Safety Ex ib IIB only for connection to a certified intrinsically safe circuit Maximum values: $U_i = 10.5 V$ $I_i = 640 mA$ $P_i = 6.72 W$ The connection to the following measuring transducers is permissible: type OCP according to TÜV 00 ATEX 1572 or type PCP-E according to TÜV 03 ATEX 2268 or type IXT0 according to TÜV 14 ATEX 142076 The effective internal capacitance and inductance of the electronics are negligibly small.
RS485 interface (Cable tail; connection wires: white: RxTx+ green: RxTx- blue: GND)	in type of protection Intrinsic Safety Ex ib IIB maximum values: $U_o = 6$ V $I_o = 81.9$ mA (long time; for calculation of P_o) $I_o = 154$ mA (short time; for calculation of L_o , C_o) $P_o = 123$ mW characteristic line: linear The effective internal capacitance and inductance of the electronics are negligibly small.

P17-F-016 09.12

page 1/2



4. Supplement to Certificate No. TÜV 03 ATEX 2262

Ex ib		В
max. permissible external inductance	9.5 mH	1 mH
max. permissible external capacitance	5.1 µF	13 µF

At connection of the RS485 interface to belonging measuring transducers with active intrinsically safe circuits, the rules for the interconnection of intrinsically safe circuits have to be observed.

maximum values:

$$U_i = 12.06 V$$

 $I_i = 176 mA$
 $P_i = 531 mW$

All other data apply unchanged.

The equipment incl. of this supplement meets the requirements of these standards:

EN 60079-0:2012 EN 60079-11:2012

(16) The test documents are listed in the test report No. 15 203 123378.

(17) Special conditions for safe use

none

(18) Essential Health and Safety Requirements

no additional ones

TÜV NORD CERT GmbH, Langemarckstraße 20, 45141 Essen, notified by the central office of the countries for safety engineering (ZLS), Ident. Nr. 0044, legal successor of the TÜV NORD CERT GmbH & Co. KG Ident. Nr. 0032

The head of the notified body

Meyer

Hanover office, Am TÜV 1, 30519 Hannover, Tel.: +49 (0) 511 986-1455, Fax: +49 (0) 511 986-1590

page 2/2

		of Conform	in cy
	Certification Sc	ECTROTECHNICAL C heme for Explosive At of the IECEx Scheme visit www.iecex	mospheres
Certificate No.:	IECEx TUN 15.0014	issue No.:1	Certificate history: Issue No. 1 (2015-7-24)
Status:	Current		Issue No. 0 (2015-6-11)
Date of Issue:	2015-07-24	Page 1 of 4	
Applicant:	NIVUS GmbH Im Täle 2 75031 Eppingen Germany		
Electrical Apparatus: Optional accessory:	Sensors type POA,	OCL-L1 and CS2 (see below)	
Type of Protection:	Intrinsic safety		¥
Marking:	Ex ib IIB T4 Gb		
Approved for issue on Certification Body:	behalf of the IECEx	Andreas Meyer	
Position:		Head of IECEx Certification Body	
Signature: for printed version)		he f	
Date:		2015-03-24	8
. This certificate is not	chedule may only be repro transferable and remains t enticity of this certificate ma	duced in full. he property of the issuing body. ay be verified by visiting the Official IEC	CEx Website.
rtificate issued by:		The second s	-
τυ	V NORD CERT GmbH Hanover Office Am TÜV 1 30519 Hannover Germany	τυν	NORD

IEC IECEx IECEx Certificate of Conformity		
Certificate No.:	IECEx TUN 15.0014	
Date of Issue:	2015-07-24	Issue No.: 1
		Page 2 of 4
Manufacturer:	NIVUS GmbH Im Täle 2 75031 Eppingen Germany	
Additional Manufacturing (s):	location	
found to comply with the covered by this certificate	IEC Standard list below and that the manuf , was assessed and found to comply with t	ive of production, was assessed and tested and acturer's quality system, relating to the Ex produ- he IECEx Quality system requirements. This heme Rules, IECEx 02 and Operational Docum
STANDARDS:		
The electrical apparatus a	and any acceptable variations to it specified comply with the following standards:	in the schedule of this certificate and the identii
The electrical apparatus a documents, was found to IEC 60079-0 : 2011	and any acceptable variations to it specified comply with the following standards: Explosive atmospheres - Part 0: Gener	
The electrical apparatus a documents, was found to	comply with the following standards:	al requirements
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip	al requirements oment protection by intrinsic safety "i" y and performance requirements other than thos
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safet; expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "i" y and performance requirements other than thos
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F A sample(s) of the equipm Test Report:	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F A sample(s) of the equipm Test Report: DE/TUN/ExTR15.0032/00	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F A sample(s) of the equipm Test Report: DE/TUN/ExTR15.0032/00 Quality Assessment Repo	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F A sample(s) of the equipm Test Report: DE/TUN/ExTR15.0032/00 Quality Assessment Repo	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F A sample(s) of the equipm Test Report: DE/TUN/ExTR15.0032/00 Quality Assessment Repo	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.
The electrical apparatus a documents, was found to IEC 60079-0 : 2011 Edition: 6.0 IEC 60079-11 : 2011 Edition: 6.0 This Certificate does n TEST & ASSESSMENT F A sample(s) of the equipm Test Report: DE/TUN/ExTR15.0032/00 Quality Assessment Repo	comply with the following standards: Explosive atmospheres - Part 0: Gener Explosive atmospheres - Part 11: Equip ot indicate compliance with electrical safety expressly included in the Standar REPORTS: nent listed has successfully met the examin	al requirements oment protection by intrinsic safety "" y and performance requirements other than thos rds listed above.


₩		IECEx Certificate of Conformity	
Certificate No.:	IECEx TUN 15.0014		
Date of Issue:	2015-07-24	Issue No.: 1	
		Page 3 of 4	
	Sche	dule	
EQUIPMENT: Equipment and systems co	overed by this certificate are as follo	ws:	
Together with the as	ssociated measuring transf	ormers the sensors type	
POA-x2xx xx E xx x			
OCL-L1 x x xx E xx CS2-xxxx xx E xx x	K and		
		eed and the flow level in partly or fully f	illor
pipes and channels	via supersonic technology.	and the new level in party of fully f	met
The permissible amb	pient temperature range of	the sensors is -20 °C 40 °C.	
See annexe for further in			
	iomation		
CONDITIONS OF CERTIFI	CATION: NO		
CONDITIONS OF CERTIFI	CATION: NO		
	CATION: NO		
CONDITIONS OF CERTIF	CATION: NO		
	CATION: NO		

		Ex Certi		
Certificate No.:	IECEx TUN 15.0014			
Date of Issue:	2015-07-24		Issue No.: 1	
			Page 4 of 4	
	E CHANGES (for issues 1 and			
The correct marking is: Ex ib IIB T4 Gb	1 was to correct a fault on pa	ge 1.		
No other changes were de	one.			
*		· · · · ·	ē.	

ex: Annexe_COC_POA_OCL_CS2.pdf

The system sensor family Mini consists of the following components:

- Electronic Box Mini type EBM
- Correlation Sensor Mini type CSM and CSM-D
- Distance Sensor Mini type **DSM**

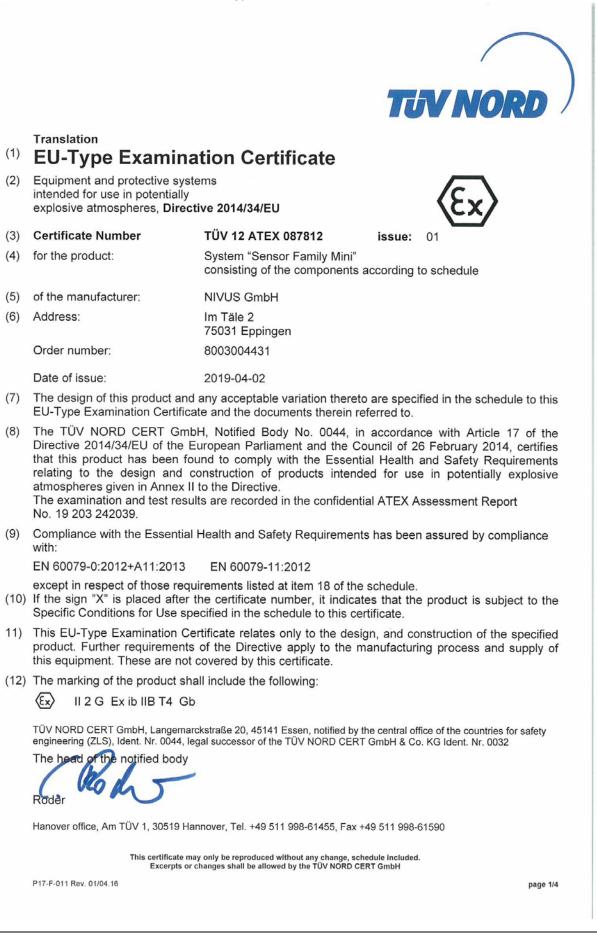



(13) SCHEDULE

(14) EU-Type Examination Certificate No. TÜV 12 ATEX 087812 issue 01

(15) Description of product

In conjunction with the belonging measuring transducers resp. Ex-Separator-Module, the system "Sensor Family Mini" is used for measurement of the flow speed and the flow level in partly or fully filled pipes and channels via supersonic technology.

The system "Sensor Family Mini" consists of the following components: Electronic Box Mini type EBM Sensors type correlation sensor CSM-V100, CSM-V1D0, CSM-V100Rx, CSP-V2xx, distance sensor DSM-L0 and level sensor OCL-LM, clamp-on sensor NIC-CO, transit time sensor NIS0 V200, TSP0 V200, NIS-V200 und NIS-V280

The permissible ambient temperature range is: For EBM: -20 °C ... 40 °C For all sensors: -40 °C ... 80 °C

Electrical data

(Connection wires (pig tail): red [+], blue [GND]

Signal and supply circuit (of EBM) in type of protection Intrinsic Safety Ex ib IIB only for connection to a certified intrinsically safe circuit Maximum values: $U_i = 10.5 V$

 $I_i = 640 \text{ mA}$ $P_i = 6.72 W$

The connection to the following measuring transducers of the manufacturer is permissible:

type OCP-...

type PCP-E ...

The connection to the following Ex-Separator-Module is permissible:

type iXT0 xxx

The effective internal capacitance and inductance of the electronics are negligibly small.

The capacitances and inductances of the connected cable have to be taken into account.

page 2/4



Schedule to EU-Type Examination Certificate No. TÜV 12 ATEX 087812 issue 01

Interface RS485 (of EBM) (Connection wires (pig tail): white [RxTx+] green [RxTx-] blue: GND)

Interface RS485 (of EBM) in type of protection Intrinsic Safety Ex ib IIB

Maximum values: $U_o = 6$ V $I_o = 81.9$ mA Angle current: 50 mA Angle voltage: 4 V $P_o = 200$ mW Characteristic line: angular The effective internal capacitance and inductance of the electronics are negligibly small.

Ex ib	II	В
max. permissible external inductance	10 mH	1 mH
max. permissible external capacitance	3.8 µF	11.2 µF

At connection of the interface RS485 to belonging measuring transducers with active intrinsically safe circuits, the rules for interconnection of intrinsically safe circuits have to be taken into account.

The interconnection of the electronic box Mini type EBM with the sensors

Correlation sensor Mini type CSM-V100 or CSM-V1D0 or CSM-V100Rx or CSP-V2xx and
 Distance sensor Mini type DSM (or filling level sensor type OCL-LM)

via a cable of the manufacturer with a length of 20 m is permissible.

Piezo connections (Connector Pins A/B or C/D)	in type of protection Intrinsic Safety Ex ib IIB Only for connection to the intrinsically safe circuits of the devices "Electronic Box Mini" EBM or the "NivuFlow Mobile" NFM of the manufacturer with safe energy limitation $C_i = 11 \text{ nF}$ $L_i = 12 \mu\text{H}$
1-Wire temperature sensor, 1-Wire EEPROM (Connector Pins E, F and J)	in type of protection Intrinsic Safety Ex ib IIB Only for connection to an intrinsically safe circuit $U_i = 6 V$ $I_i = 188 mA$ $P_i = 282 mW$ $C_i = 120 \text{ nF}$ The effective internal inductance is negligibly small.

page 3/4



Schedule to EU-Type Examination Certificate No. TÜV 12 ATEX 087812 issue 01

in type of protection Intrinsic Safety Ex ib IIB Only for connection to an intrinsically safe circuit $U_i = 6$ V $I_i = 264$ mA $P_i = 396$ mW $C_i = 20.15 \,\mu\text{F}$ The effective internal inductance is negligibly small.

Details of Change:

The type designations for some sensors were changed. No technical changes were performed.

(16) Drawings and documents are listed in the ATEX Assessment Report No. 19 203 232039.

(17) Specific Conditions for Use none

(18) Essential Health and Safety Requirements no additional ones

- End of Certificate -

page 4/4

	CEx	IECEx Certific of Conformit	
	IEC Certification So	ECTROTECHNICAL COMMISSIO	
Certificate No.:	IECEx TUN 18.0023	Issue No: 1	Certificate histor <u>f</u> : Issue No. 1 (2019-05-10)
Status:	Current		Issue No. 0 (2018-11-20)
Date of Issue:	2019-05-10	Page 1 of 4	
Applicant:	NIVUS GmbH		
	Im Täle 2		
	75031 Eppingen		
	German		
Equipment: Optional accessory:	System "Sensor Family Mini"; see so	hedule for details	
Type of Protection:	Intrinsic Safet		
A CONTRACTOR OF	mentisic barety if		
Marking:	Ex ib IIB T4 Gb		
Approved for issue or Certification Body:	n behalf of the IECEx	Christian Roder	
Position:		Head of IECEx Certification Bod	
Signature:			
(for printed version)			
Date:		4. 	
LABIE.			
2. This certificate is n 3. The Status and aut	schedule may only be reproduced in fu ot transferable and remains the property henticity of this certificate may be verifi		
Certificate issued by:	TÜV NORD CERT GmbH		
	TUV NORD CERT GmbH Hanover Office	\frown	
19	Am TÚV 1, 30619 Hannover		
	German	TUV NORD	

IEC <i>Tece</i>		ECEx Certificate
		of Conformity
Certificate No:	IECEx TUN 18.0023	Issue No: 1
Date of Issue:	2019-05-10	Page 2 of 4
Manufacturer:	NIVUS GmbH Im Täle 2 75031 Eppingen German∮	
Additional Manufacturing loc	ation(s):	
EC Standard list below and found to comply with the IEC Rules, IECEx 02 and Operat STANDARDS:	that the manufacturer's quality system, relatin Ex Quality system requirements. This certifica- ional Documents as amended. sptable variations to it specified in the scheduk	production, was assessed and tested and found to compl∲ with the g to the Ex products covered b∲ this certificate, was assessed and the is granted subject to the conditions as set out in IECEx Scheme e of this certificate and the identified documents, was found to compl∳
IEC 60079-0 : 2011 Edition:6.0	Explosive atmospheres - Part 0: Gene	ral requirements
EC 60079-11 : 2011 Edition:6.0	Explosive atmospheres - Part 11: Equ	ipment protection b∮ intrinsic safet∮ "7"
This Certificate does not in	idicate compliance with electrical safety and p	erformance requirements other than those expressly included in the
	Standards list	ed above.
TEST & ASSESSMENT REF A sample(s) of the equipmer	PORTS: It listed has successfully met the examination	and lest requirements as recorded in
Test Report:		
DE/TUN/ExTR18.0026/01		
Quality Assessment Report:		
DE/TUN/QAR13.0011/05		

IEC IFCEY		IECEx	Certificate
	ти	of C	onformity
Certificate No:	IECEx TUN 18.0023		Issue No: 1
Date of Issue:	2019-05-10		Page 3 of 4
		Schedule	
EQUIPMENT: Equipment and systems covered	by this certificate are as follows:		
In conjunction with the belonging r measurement of the flow speed ar	neasuring transducers resp. Ex-Se d the flow level in partl∮ or full∳ fill	eparator-Module, the s f s ed pipes and channels v	stem "Sensor Family Mini" is used for via supersonic technology.
The system "Sensor Family Mini"	consists of the following componer	nts:	
Electronic Box Mini type EBM			
Sensors type			
correlation sensor CSM-V100, CS	M-V1D0,		
CSM-V100Rx, CSP-V2xx,			
distance sensor DSM-L0 and leve	I sensor OCL-LM,		
clamp-on sensor NIC-CO,			
transit time sensor NISO V200, TS	P0 V200, NIS-V200 and NIS-V280		
The permissible ambient temperat	ure range is:		
For EBM: -20 °C 40 °C			
For all sensors: 40 °C 80 °C			
For further details see attachment			
SPECIFIC CONDITIONS OF US	E: NO		

Certificate No: IECEx TUN 18.0023 Issue No: 1 Date of Issue: 2019-06-10 Page 4 of 4 DETAILS OF CERTIFICATE CHANGES (for issues 1 and above): he t/pe designations for some sensors were changed. No technical changes were performed.	IEC IEC	Ex II	ECEx Certificate	
Date of Issue: 2019-05-10 Page 4 of 4 DETAILS OF CERTIFICATE CHANGES (for issues 1 and above): he type designations for some sensors were changed. No technical changes were performed. Annex:		ти	of Conformity	
Page 4 of 4 DETAILS OF CERTIFICATE CHANGES (for issues 1 and above): he ∜pe designations for some sensors were changed. No technical changes were performed. Annex:	Certificate No:	IECEx TUN 18.0023	Issue No: 1	
he ∳pe designations for some sensors were changed. No technical changes were performed. Annex:	Date of Issue:	2019-05-10	Page 4 of 4	
Annex:	DETAILS OF CERTIFIC	TE CHANGES (for issues 1 and above):		
	The type designations for :	some sensors were changed. No technical change	es were performed.	
_Atachment_Sensorfamiif Mini_01.pdf	Annex:			
	_Attachment_Sensorfarr	il∮ Mini_01.pdf		

TÜV NORD CERT GmbH Hannover Office Am TÜV 1 30519 Hannover Germany



Page 1 of 2 Attachment to IECEx TUN 18.0023 issue No.: 01

Product:

In conjunction with the belonging measuring transducers resp. Ex-Separator-Module, the system "Sensor Family Mini" is used for measurement of the flow speed and the flow level in partly or fully filled pipes and channels via supersonic technology. The system "Sensor Family Mini" consists of the following components: Electronic Box Mini type EBM Sensors type correlation sensor CSM-V100, CSM-V1D0, CSM-V100Rx, CSP-V2xx, distance sensor DSM-L0 and level sensor OCL-LM, clamp-on sensor NIC-CO, transit time sensor NIS0 V200, TSP0 V200, NIS-V200 and NIS-V280 The permissible ambient temperature range is: For EBM: -20 °C ... 40 °C For all sensors: -40 °C ... 80 °C Electrical data Signal and supply circuit (of EBM) in type of protection Intrinsic Safety Ex ib IIB (Connection wires (pig tail): only for connection to a certified intrinsically safe circuit red [+], blue [GND] Maximum values: $U_1 = 10.5 V$ $I_1 = 640 \text{ mA}$ $P_1 = 6.72 \text{ W}$ The connection to the following measuring transducers of the manufacturer is permissible: type OCP-... type PCP-E The connection to the following Ex-Separator-Module is permissible: type iXT0 xxx The effective internal capacitance and inductance of the electronics are negligibly small. The capacitances and inductances of the connected cable have to be taken into account. Interface RS485 (of EBM) in type of protection Intrinsic Safety Ex ib IIB (Connection wires (pig tail): white [RxTx+] Maximum values: green [RxTx-] $U_0 = 6$ V blue: GND) $l_0 = 81.9 \text{ mA}$ Angle current: 50 mA Angle voltage: 4 V Po = 200 mW Characteristic line: angular The effective internal capacitance and inductance of the electronics are negligibly small. P17-F-610 Rev. 01/05.18

TÜV NORD CERT GmbH Hannover Office Am TÜV 1 30519 Hannover Germany



Page 2 of 2 Attachment to IECEx TUN 18.0023 issue No.: 01

Ex ib		B
max. permissible external inductance	10 mH	1 mH
max. permissible external capacitance	3.8 µF	11.2 μF

At connection of the interface RS485 to belonging measuring transducers with active intrinsically safe circuits, the rules for interconnection of intrinsically safe circuits have to be taken into account.

Maxi	mum va	alues:
$U_1 =$	12.06	V
lı =	176	mA
P1 =	531	mW

The interconnection of the electronic box Mini type EBM with the sensors

Correlation sensor Mini type CSM-V100 or CSM-V1D0 or CSM-V100Rx or CSP-V2xx and
 Distance sensor Mini type DSM (or filling level sensor type OCL-LM)

via a cable of the manufacturer with a length of 20 m is permissible.

Piezo connections (Connector Pins A/B or C/D)	in type of protection Intrinsic Safety Ex ib IIB Only for connection to the intrinsically safe circuits of the devices "Electronic Box Mini" EBM or the "NivuFlow Mobile" NFM of the manufacturer with safe energy limitation $C_1 = 11 \text{ nF}$ $L_1 = 12 \mu \text{H}$
1-Wire temperature sensor,	
1-Wire EEPROM (Connector Pins E, F and J)	in type of protection Intrinsic Safety Ex ib IIB Only for connection to an intrinsically safe circuit $U_1 = 6$ V $I_1 = 188$ mA $P_1 = 282$ mW $C_1 = 120$ nF The effective internal inductance is negligibly small.
Pressure œII (Connector Pins E, G, H and J)	in type of protection Intrinsic Safety Ex ib IIB Only for connection to an intrinsically safe circuit $U_1 = 6 V$ $I_1 = 264 mA$ $P_1 = 396 mW$ $C_1 = 20.15 \mu F$ The effective internal inductance is negligibly small.
Details of Change:	
The type designations for some sensors	were changed. No technical changes were performed.
Special Conditions for Safe Use / Notes f	or Erection:

-none-

P17-F-610

Rev. 01/06.18



DE / EN / FR EU Declaration of Conformity

Déclaration de conformité UE

Fur das folgend bezeichnete Erzeugnis: For the following product: Le produit désigné ci-dessous:

NIVUS GmbH Im Täle 2 75031 Eppingen

Telefon: +49 07262 9191-0 Telefax: +49 07262 9191-999 E-Mail: info@nivus.com Internet: www.nivus.de

Bezeichnung:	Ultraschallsensoren CSM / CSP / DSM / OCL-LM
Description:	Ultrasonic sensors
Désignation:	Capteurs ultrasoniques
Тур / Туре:	CSM-V100K / CSM-V1D0K / CSM-V100R / CSP-V2 / DSM-L0 / OCL-LM

erklären wir in alleiniger Verantwortung, dass die auf dem Unionsmarkt ab dem Zeitpunkt der Unterzeichnung bereitgestellten Geräte die folgenden einschlägigen Harmonisierungsvorschriften der Union erfüllen:

we declare under our sole responsibility that the equipment made available on the Union market as of the date of signature of this document meets the standards of the following applicable Union harmonisation legislation: nous déclarons, sous notre seule responsabilité, à la date de la présente signature, la conformité du produit pour le marché de l'Union, aux directives d'harmonisation de la législation au sein de l'Union:

· 2014/30/EU · 2011/65/EU

Bei der Bewertung wurden folgende einschlägige harmonisierte Normen zugrunde gelegt bzw. wird die Konformität erklärt in Bezug die nachfolgend genannten anderen technischen Spezifikationen:

The evaluation assessed the following applicable harmonised standards or the conformity is declared in relation to other technical specifications listed below:

L'évaluation est effectuée à partir des normes harmonisées applicable ou la conformité est déclarée en relation aux autres spécifications techniques désignées ci-dessous:

• EN 61326-1:2013

Diese Erklärung wird verantwortlich für den Hersteller: This declaration is submitted on behalf of the manufacturer: Le fabricant assume la responsabilité de cette déclaration:

> **NIVUS GmbH** Im Taele 2 75031 Eppingen Allemagne

abgegeben durch / represented by / faite par: Marcus Fischer (Geschäftsführer / Managing Director / Directeur général)

Eppingen, den 21.11.2018



EU Declaration of Conformity

Déclaration de conformité UE

Für das folgend bezeichnete Erzeugnis: For the following product: Le produit désigné ci-dessous: NIVUS GmbH Im Täle 2 75031 Eppingen

 Telefon:
 +49 07262 9191-0

 Telefax:
 +49 07262 9191-999

 E-Mail:
 info@nivus.com

 Internet:
 www.nivus.de

Bezeichnung:	"Ex" Ultraschallsensoren CSM / CSP / DSM / OCL-LM
Description:	"Ex" ultrasonic sensors
Désignation:	"Ex" capteurs ultrasoniques
Тур / Туре:	CSM-V100KxE / CSM-V1D0KxE / CSM-V100RxE / CSP-V2xxxxE / DSM-L0xxxxE / OCL-LMxxxxE

erklären wir in alleiniger Verantwortung, dass die auf dem Unionsmarkt ab dem Zeitpunkt der Unterzeichnung bereitgestellten Geräte die folgenden einschlägigen Harmonisierungsvorschriften der Union erfüllen:

we declare under our sole responsibility that the equipment made available on the Union market as of the date of signature of this document meets the standards of the following applicable Union harmonisation legislation:

nous déclarons, sous notre seule responsabilité, à la date de la présente signature, la conformité du produit pour le marché de l'Union, aux directives d'harmonisation de la législation au sein de l'Union:

• 2014/30/EU • 2014/34/EU • 2011/65/EU

Bei der Bewertung wurden folgende einschlägige harmonisierte Normen zugrunde gelegt bzw. wird die Konformität erklärt in Bezug die nachfolgend genannten anderen technischen Spezifikationen:

The evaluation assessed the following applicable harmonised standards or the conformity is declared in relation to other technical specifications listed below:

L'évaluation est effectuée à partir des normes harmonisées applicable ou la conformité est déclarée en relation aux autres spécifications techniques désignées ci-dessous:

• EN 61326-1:2013 • EN 60079-0:2012 +A11:2013

Ex-Kennzeichnung / Ex-designation / Marquage Ex :

• EN 60079-11:2012

EU-Baumusterprüfbescheinigung / EU-Type Examination Certificate / Attestation d'examen «UE» de type:

TÜV 12 ATEX 087812 ISSUE: 01

Notifizierte Stelle (Kennnummer) / Notified Body (Identif. No.) / Organisme notifié (Ne d'identification)

TÜV Nord CERT GmbH, Am TÜV 1, 30519 Hannover, Allemagne

(0044)

Diese Erklärung wird verantwortlich für den Hersteller: This declaration is submitted on behalf of the manufacturer: Le fabricant assume la responsabilité de cette déclaration: NIVUS GmbH Im Taele 2 75031 Eppingen Allemagne

abgegeben durch / represented by / faite par: Marcus Fischer (Geschäftsführer / Managing Director / Directeur général)

Eppingen, den 20.12.2019



EU Declaration of Conformity

Déclaration de conformité UE

Für das folgend bezeichnete Erzeugnis: For the following product: Le produit désigné ci-dessous: NIVUS GmbH Im Täle 2 75031 Eppingen

 Telefon:
 +49 07262 9191-0

 Telefax:
 +49 07262 9191-999

 E-Mail:
 info@nivus.com

 Internet:
 www.nivus.de

Bezeichnung:	Externe Elektronikbox EBM
Description:	external electronic Box
Désignation:	boîtier électronique externe
Тур / Туре:	EBM

erklären wir in alleiniger Verantwortung, dass die auf dem Unionsmarkt ab dem Zeitpunkt der Unterzeichnung bereitgestellten Geräte die folgenden einschlägigen Harmonisierungsvorschriften der Union erfüllen:

we declare under our sole responsibility that the equipment made available on the Union market as of the date of signature of this document meets the standards of the following applicable Union harmonisation legislation:

nous déclarons, sous notre seule responsabilité, à la date de la présente signature, la conformité du produit pour le marché de l'Union, aux directives d'harmonisation de la législation au sein de l'Union:

• 2014/30/EU • 2011/65/EU

Bei der Bewertung wurden folgende einschlägige harmonisierte Normen zugrunde gelegt bzw. wird die Konformität erklärt in Bezug die nachfolgend genannten anderen technischen Spezifikationen:

The evaluation assessed the following applicable harmonised standards or the conformity is declared in relation to other technical specifications listed below:

L'évaluation est effectuée à partir des normes harmonisées applicable ou la conformité est déclarée en relation aux autres spécifications techniques désignées ci-dessous:

• EN 61326-1:2013

Diese Erklärung wird verantwortlich für den Hersteller: This declaration is submitted on behalf of the manufacturer: Le fabricant assume la responsabilité de cette déclaration:

> NIVUS GmbH Im Taele 2 75031 Eppingen Allemagne

abgegeben durch / represented by / faite par: Marcus Fischer (Geschäftsführer / Managing Director / Directeur général)

Eppingen, den 20.04.2016



NIVUS GmbH

lm Täle 2 75031 Eppingen

EU Konformitätserklärung

EU Declaration of Conformity

Déclaration de conformité UE

Für das folgend bezeichnete Erzeugnis: For the following product: Le produit désigné ci-dessous:

Bezeichnung:	"Ex" Externe Elektronikbox EBM
Description:	"Ex" external electronic Box
Désignation:	"Ex" boîtier électronique externe
Тур / Туре:	EBM-xxxxxE

erklären wir in alleiniger Verantwortung, dass die auf dem Unionsmarkt ab dem Zeitpunkt der Unterzeichnung bereitgestellten Geräte die folgenden einschlägigen Harmonisierungsvorschriften der Union erfüllen:

we declare under our sole responsibility that the equipment made available on the Union market as of the date of signature of this document meets the standards of the following applicable Union harmonisation legislation:

nous déclarons, sous notre seule responsabilité, à la date de la présente signature, la conformité du produit pour le marché de l'Union, aux directives d'harmonisation de la législation au sein de l'Union:

•2014/30/EU •2014/34/EU •2011/65/EU

Bei der Bewertung wurden folgende einschlägige harmonisierte Normen zugrunde gelegt bzw. wird die Konformität erklärt in Bezug die nachfolgend genannten anderen technischen Spezifikationen:

The evaluation assessed the following applicable harmonised standards or the conformity is declared in relation to other technical specifications listed below:

L'évaluation est effectuée à partir des normes harmonisées applicable ou la conformité est déclarée en relation aux autres spécifications techniques désignées ci-dessous:

• EN 61326-1:2013 • EN 60079-0:2012 +A11:2013

Ex-Kennzeichnung / Ex-designation / Marquage Ex :

🕢 II 2G Ex ib IIB T4 Gb

• EN 60079-11:2012

EU-Baumusterprüfbescheinigung / EU-Type Examination Certificate / Attestation d'examen «UE» de type:

TÜV 12 ATEX 087812 ISSUE: 01

Notifizierte Stelle (Kennnummer) / Notified Body (Identif. No.) / Organisme notifié (Ne d'identification)

TÜV Nord CERT GmbH, Am TÜV 1, 30519 Hannover, Allemagne

(0044)

NIVUS GmbH Im Taele 2

Allemagne

75031 Eppingen

Diese Erklärung wird verantwortlich für den Hersteller: This declaration is submitted on behalf of the manufacturer: Le fabricant assume la responsabilité de cette déclaration:

abgegeben durch / represented by / faite par: Marcus Fischer (Geschäftsführer / Managing Director / Directeur général)

Eppingen, den 20.12.2019

Gez. Marcus Fischer

DE / EN / FR



- EU Declaration of Conformity
- Déclaration de conformité UE

Æ

/ EN /

B

Für das folgend bezeichnete Erzeugnis: For the following product: Le produit désigné ci-dessous: NIVUS GmbH Im Täle 2 75031 Eppingen

 Telefon:
 +49 07262 9191-0

 Telefax:
 +49 07262 9191-999

 E-Mail:
 info@nivus.com

 Internet:
 www.nivus.de

Bezeichnung:	Ultraschall-Aktivsensoren POA / OCL / CS2
Description:	Ultrasonic active sensors
Désignation:	Capteurs actifs ultrasoniques
Typ / Type:	POA / OCL / CS2

erklären wir in alleiniger Verantwortung, dass die auf dem Unionsmarkt ab dem Zeitpunkt der Unterzeichnung bereitgestellten Geräte die folgenden einschlägigen Harmonisierungsvorschriften der Union erfüllen:

we declare under our sole responsibility that the equipment made available on the Union market as of the date of signature of this document meets the standards of the following applicable Union harmonisation legislation:

nous déclarons, sous notre seule responsabilité, à la date de la présente signature, la conformité du produit pour le marché de l'Union, aux directives d'harmonisation de la législation au sein de l'Union:

• 2014/30/EU • 2011/65/EU

Bei der Bewertung wurden folgende einschlägige harmonisierte Normen zugrunde gelegt bzw. wird die Konformität erklärt in Bezug die nachfolgend genannten anderen technischen Spezifikationen:

The evaluation assessed the following applicable harmonised standards or the conformity is declared in relation to other technical specifications listed below:

L'évaluation est effectuée à partir des normes harmonisées applicable ou la conformité est déclarée en relation aux autres spécifications techniques désignées ci-dessous:

• EN 61326-1:2013

Diese Erklärung wird verantwortlich für den Hersteller: This declaration is submitted on behalf of the manufacturer: Le fabricant assume la responsabilité de cette déclaration:

> NIVUS GmbH Im Taele 2 75031 Eppingen Allemagne

abgegeben durch / represented by / faite par: Marcus Fischer (Geschäftsführer / Managing Director / Directeur général)

Eppingen, den 20.04.2016



EU Declaration of Conformity

Déclaration de conformité UE

Für das folgend bezeichnete Erzeugnis: For the following product: Le produit désigné ci-dessous: NIVUS GmbH Im Täle 2 75031 Eppingen

 Telefon:
 +49 07262 9191-0

 Telefax:
 +49 07262 9191-999

 E-Mail:
 info@nivus.com

 Internet:
 www.nivus.de

Bezeichnung:	"Ex" Ultraschall-Aktivsensoren POA / OCL / CS2	
Description:	"Ex" Ultrasonic active sensors	
Désignation:	"Ex" capteurs actifs ultrasoniques	
Тур / Туре:	POA-x2xxxxE / OCL-L1xxxxE / CS2-xxxxxxE	

erklären wir in alleiniger Verantwortung, dass die auf dem Unionsmarkt ab dem Zeitpunkt der Unterzeichnung bereitgestellten Geräte die folgenden einschlägigen Harmonisierungsvorschriften der Union erfüllen:

we declare under our sole responsibility that the equipment made available on the Union market as of the date of signature of this document meets the standards of the following applicable Union harmonisation legislation:

nous déclarons, sous notre seule responsabilité, à la date de la présente signature, la conformité du produit pour le marché de l'Union, aux directives d'harmonisation de la législation au sein de l'Union:

• 2014/30/EU • 2014/34/EU • 2011/65/EU

Bei der Bewertung wurden folgende einschlägige harmonisierte Normen zugrunde gelegt bzw. wird die Konformität erklärt in Bezug die nachfolgend genannten anderen technischen Spezifikationen:

The evaluation assessed the following applicable harmonised standards or the conformity is declared in relation to other technical specifications listed below:

L'évaluation est effectuée à partir des normes harmonisées applicable ou la conformité est déclarée en relation aux autres spécifications techniques désignées ci-dessous:

• EN 61326-1:2013 • EN 60079-0:2012 +A11:2013

Ex-Kennzeichnung / Ex-designation / Marquage Ex:

🕼 II 2G Ex ib IIB T4 Gb

• EN 60079-11:2012

EU-Baumusterprüfbescheinigung / EU-Type Examination Certificate / Attestation d'examen «UE» de type:

TÜV 03 ATEX 2262 (4. Ergänzung)

Notifizierte Stelle (Kennnummer) / Notified Body (Identif. No.) / Organisme notifié (Ne d'identification)

TÜV Nord CERT GmbH, Am TÜV 1, 30519 Hannover, Allemagne

(0044)

NIVUS GmbH Im Taele 2

Allemagne

75031 Eppingen

Diese Erklärung wird verantwortlich für den Hersteller: This declaration is submitted on behalf of the manufacturer: Le fabricant assume la responsabilité de cette déclaration:

abgegeben durch / represented by / faite par: Marcus Fischer (Geschäftsführer / Managing Director / Directeur général)

Eppingen, den 20.12.2019

Gez. Marcus Fischer

DE / EN / FR